







## Preliminary specification according to EN 1307

|                                        |                                                                                    |              |
|----------------------------------------|------------------------------------------------------------------------------------|--------------|
| Type of manufacture                    | Tufted 1/10 "                                                                      | ISO 2424     |
| Aspect                                 | Structured loop pile                                                               | ISO 2424     |
| Dye method                             | Solution dyed                                                                      |              |
| Dimension                              | 50 cm x 50 cm / 19,68" x 19,68"                                                    | EN ISO 24342 |
|                                        | (20 tiles per box)                                                                 |              |
| Primary backing                        | Colback® Gold Polyester fleece                                                     | ISO 2424     |
| Secondary backing                      | DESSO EcoBase®** - Containing at least 75% C2C positively defined recycled content | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **         | ISO 2424     |
| Total thickness                        | 6.5 mm 0.3 inch                                                                    | ISO 1765     |
| Effective pile thickness               | 3.0 mm 0.12 inch                                                                   | ISO 1766     |
| Total mass                             | 4300 g/m² 126.9 oz/yd²                                                             | ISO 8543     |
| Total pile mass                        | 840 g/m² 24.8 oz/yd²                                                               | ISO 2424     |
| Effective pile mass                    | 490 g/m² 14.5 oz/yd²                                                               | ISO 8543     |
| Pile density                           | 0.163 g/cm³ 0.0059 lb/in³                                                          | ISO 8543     |
| Number of tufts                        | 1540 /dm² 128759 /yd²                                                              | ISO 1763     |
| Stroll test                            | ≤ 2,0 kV                                                                           | ISO 6356     |
| Vertical resistance                    | ≤ 1 x 10⁹ Ohm                                                                      | ISO 10965    |
| Use classification                     | 33 Commercial - heavy use                                                          | EN 1307      |
| Dimensional stability                  | ≤ 0,2 %                                                                            | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 24 dB                                                                              | ISO 10140    |
| Noise reduction                        | 0.15 α <sub>w</sub>                                                                | ISO 354      |
| Flammability                           | B <sub>fl</sub> - s1 (loose laid tested)                                           | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                                                     | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                                                     | CIELAB       |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™ backing



**ECONYL®**  
ENDLESS POSSIBILITIES




EN 14041  
0493-CPR-0002

Manufactured by


Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk




**1051**  
L 62,10 / LRV 30,52

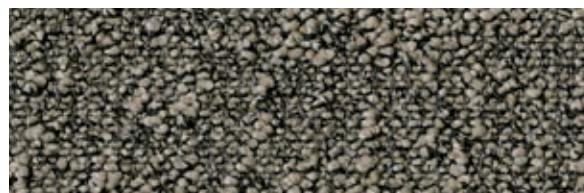

**2913**  
L 45,99 / LRV 15,26

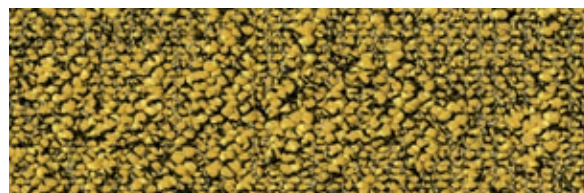


**6202**  
L 51,28 / LRV 19,51

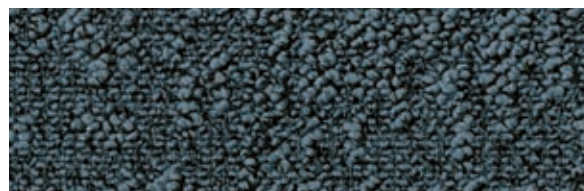


**8900**  
L 36,26 / LRV 9,14



**9056**  
L 44,09 / LRV 13,90

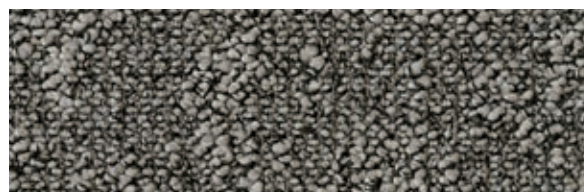

**9535**  
L 44,63 / LRV 14,28

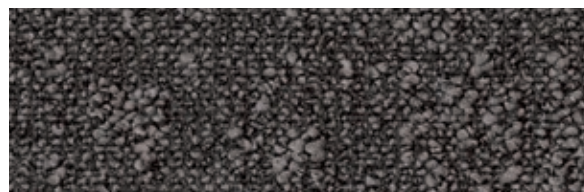

**9970**  
L 32,67 / LRV 7,39