

DESSO

Protect & Defend

INDOOR ENTRANCE MATTING

CARPET TILES

INDOOR ENTRANCE MATTING SYSTEM

Easy and flexible indoor matting system for entrance areas, providing protection and ensuring a clean environment.

DESSO Protect is a high-performance mat suitable for the first point of contact and designed to remove dirt and absorb moisture during the first steps. For maximum protection and optimised performance, combine with DESSO Defend indoor entrance mat to stop the remaining dirt and moisture from being tracked further into the building, helping to reduce slip accidents, increase the life cycle of surrounding floorcoverings and reduce cleaning and maintenance costs.




PROTECT 9021
DEFEND 9022
DESERT 6431

FLEXIBLE SOLUTION

DESSO Protect and DESSO Defend can also be used stand-alone, ideal for other areas in the building that are subject to increased risk of soiling and heavy wear. The individual tiles can easily be removed for cleaning or replacement offering a flexible, cost-effective, and convenient solution..



PROTECT 9021
DEFEND 9022
DESERT 6431

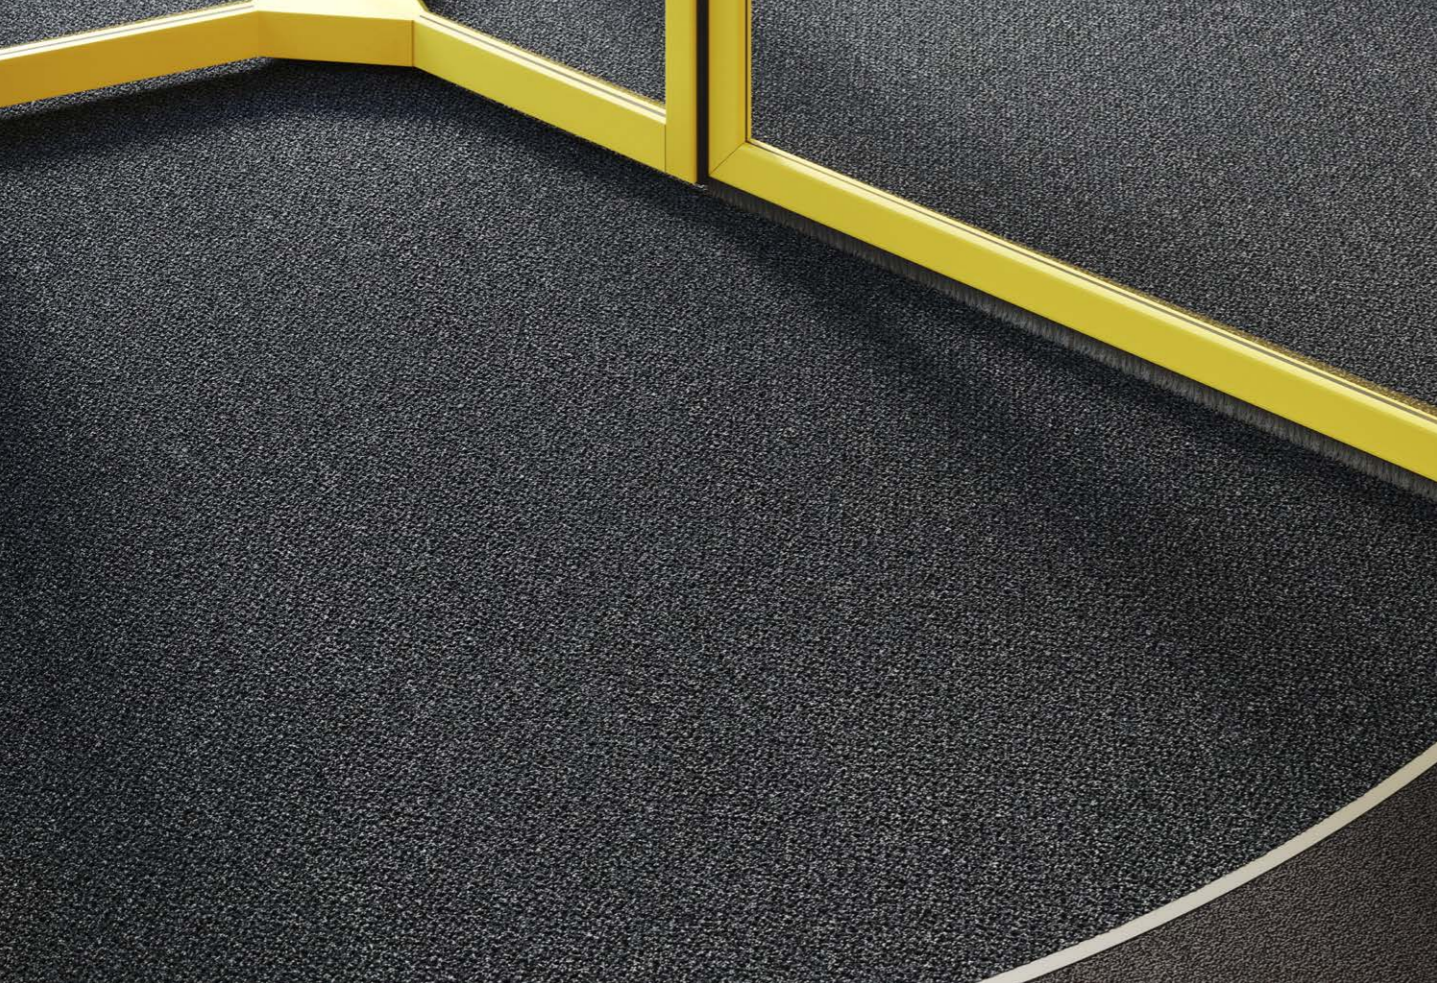

DESSO **PROTECT**

PROTECT 9021
DEFEND 9022

DESSO Protect is a high-performance indoor entrance mat suitable for the first point of contact. An easy to install wool and nylon cut pile carpet tile designed for maximum scraping and moisture absorption. Available in two grey tones, providing a subtle and neutral base that suits any commercial interior.

DESSO **DEFEND**

Affordable but effective, the DESSO Defend indoor entrance mat is made of 100% ECONYL yarn with a built-in scraper that stops the remaining dirt and moisture from being transferred further into the building, making sure adjoining flooring is kept clean.



PROTECT 9021
DEFEND 9022

EFFICIENT AND **EFFECTIVE**

COLOURWAYS

INDOOR ENTRANCE MATTING COLLECTION

PROTECT



A076 9021
710026007




A076 9990
710026006

DEFEND



AD019 9022
712199002



AD019 9502
712199003


Why choose DESSO indoor matting system:

- First impression - offers a welcoming entrance for your visitors and employees
- Safety - helps reduce slip accidents
- Reduce maintenance costs - the individual tiles can be easily removed and replaced
- Interior floor protection – extends the life of surrounding floor covering

TECHNICAL SPECIFICATIONS PROTECT

Specification according to EN 1307



Type of manufacture	ISO 2424	Tufted 1/8 "						
Aspect	ISO 2424	Cut pile						
Dye method	Hank dyed							
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68" (16 tiles per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	ProBase - modified bitumen.						
Pile fibre composition	ISO 2424	80% wool - 20% polyamide						
Total thickness	ISO 1765	mm	10.0	inch	0.4			
Effective pile thickness	ISO 1766	mm	5.2	inch	0.20			
Total mass	ISO 8543	g/m ²	4800	oz/yd ²	141.7			
Total pile mass	ISO 2424	g/m ²	1470	oz/yd ²	43.4			
Effective pile mass	ISO 8543	g/m ²	790	oz/yd ²	23.3			
Pile density	ISO 8543	g/cm ³	0.152	lb/in ³	0.0055			
Number of tufts	ISO 1763	/dm ²	1110	/yd ²	92807			
Stroll test	ISO 6356	kV						
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307							
Luxury rating	EN 1307							
Dimensional stability	EN 986	%						
Impact sound reduction ΔL_w	ISO 10140	dB						
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α_s						
Noise reduction	ISO 354	α_w						
Thermal resistance	ISO 8302	m ² .K/W						
Flammability	EN 13501-1	Cfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info							




EN 14041
0493-CPR-0002

Manufactured by:

Tarkett BV
Taxandriaweg 15
NL - 5142 PA Waalwijk



DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20230607


Tarkett BV
Taxandriaweg 15
NL-5142 PA Waalwijk





Preliminary specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Loop pile						
Dye method		Solution dyed						
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68" (20 tiles per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	ProBase - modified bitumen.						
Pile fibre composition	ISO 2424	BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **						
Total thickness	ISO 1765	mm	6.5	inch	0.3			
Effective pile thickness	ISO 1766	mm	3.6	inch	0.14			
Total mass	ISO 8543	g/m ²	3850	oz/yd ²	113.6			
Total pile mass	ISO 2424	g/m ²	670	oz/yd ²	19.8			
Effective pile mass	ISO 8543	g/m ²	460	oz/yd ²	13.6			
Pile density	ISO 8543	g/cm ³	0.128	lb/in ³	0.0046			
Number of tufts	ISO 1763	/dm ²	1580	/yd ²	132104			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307							
Luxury rating	EN 1307							
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	-					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w						
Thermal resistance	ISO 8302	m ² .K/W						
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info							

TECHNICAL SPECIFICATIONS DEFEND


 Manufactured by:
 Tarkett BV
 Taxandriaweg 15
 NL - 5142 PA Waalwijk
 EN 14041
 0493-CPR-0002





** ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: www.tarkett.com

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20230717

Tarkett BV
Taxandriaweg 15
NL-5142 PA Waalwijk



