# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

## iQ Range homogeneous with Bio-attributed vinyl flooring from TARKETT



Programme:	The International EPD <sup>®</sup> System, <u>www.environdec.com</u>
Programme operator:	EPD International AB
EPD registration number:	S-P-05038
Publication date:	2021-11-15
Valid until:	2026-11-15
	An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com





## **General information**

#### Programme information

Programme:	The International EPD <sup>®</sup> System
	EPD International AB
Address:	Box 210 60
Address.	SE-100 31 Stockholm
	Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14 version 1.1 and Sub-PCR-F Resilient textile and laminate floor coverings (EN 16810)

PCR review was conducted by: <name and organisation of the review chair, and information on how to contact the chair through the programme operator>

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

 $\Box$  EPD process certification  $\boxtimes$  EPD verification

Third party verifier: M. Damien Prunel from LCIE Bureau Veritas.

Procedure for follow-up of data during EPD validity involves third party verifier:

 $\boxtimes$  Yes  $\Box$  No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.





#### **Company information**

Owner of the EPD: Tarkett

<u>Contact:</u> Vincent MONTI, <u>vincent.monti@tarkett.com</u>, Tarkett La Défense, 1 Terrasse Bellini 92400 Paris

#### Description of the organisation:

With an international coverage and a wide range of products, Tarkett has over 130 years of experience in providing integrated solutions for floorings to professionals and end users.

Many of the most important architectural firms in the world and building professionals have chosen Tarkett for the value of its products and for its consultation and service abilities. Therefore, Tarkett floorings and sport surfaces are present in several prestigious architectural reference points. Tarkett offers integrated solutions for floorings, able to meet the particular needs of customers. Our wide range of designs, colors and models provides an infinite series of possibilities, contributing to create a positive environment and a better quality of life for people.

Tarkett operates with the utmost respect for the environment towards the realization of eco-friendly products.

Tarkett's commitment to the environment is woven throughout its business. Cradle-to-Cradle principles are, in fact, the basis of the design and production of every solution. Particularly, the lifecycle analysis is used to continuously improve the production process, and so the products until their use stage, disposal and recycling. The commitment to the environment is also proven by the accession to the Circular Economy 100 program, where Tarkett group, with a network of companies, is working to develop a circular economy model based on the reuse of materials and preservation of natural resources. The development of products that can be reused within internal production cycles, or external ones in case of other individuals, has been an integral part of the business strategy aimed at sustainability for many years. The WCM (World Class Manufacturing) management system has been developed in 2009, and it includes the environmental pillar aimed to the elimination of losses and to the growth of process efficiency.

Product-related or management system-related certifications: ISO 9001, ISO 14001, ISO 50001, WCM manufacturing site.

Name and location of production site(s): Ronneby, Sweden

#### **Product information**

<u>Product name:</u> iQ Eminent (Bio-attributed vinyl), iQ Granit (Bio-attributed vinyl), iQ Optima (Bio-attributed vinyl).

<u>Product identification:</u> Homogeneous Bio-attributed poly (vinyl chloride) floor covering (ISO 10581) <u>Product description:</u> iQ Range products are homogeneous vinyl floorings. The polyvinyl chloride in iQ Granit, iQ Eminent and iQ Optima is bio-attributed. In the context of the RSB certification, the term attribution can be described as the action of a virtual transfer of a sustainability credential (i.e. replacing fossil with bio-based feedstock) of the feedstock to a specific batch of vinyl.They are tough and ultradurable solutions for heavy and very heavy traffic areas, especially recommended for applications in healthcare and education for their resistance and ease of cleaning. Composed of a single compact layer of vinyl, homogeneous vinyl floors are glued to the subfloor and welded for optimal durability and hygiene. The service lifetime recommended by Tarkett is 30 years.

<u>Geography:</u> European technology and process coverage.

UN CPC code: APE/NAF - 2223Z

#### LCA information


<u>Functional unit / declared unit:</u> 1m<sup>2</sup> of floor covering with a reference service life (RSL) of 1 year for specified characteristics application and use areas according to ISO 10581 and EN ISO 10874. Reference service life: 30 years

Time representativeness: 2020

**EPD**<sup>®</sup>

<u>Database(s) and LCA software used:</u> Ecoinvent3.6, Simapro 9.1 <u>Description of system boundaries:</u> Cradle to grave and module D (A + B + C + D)

#### System diagram:

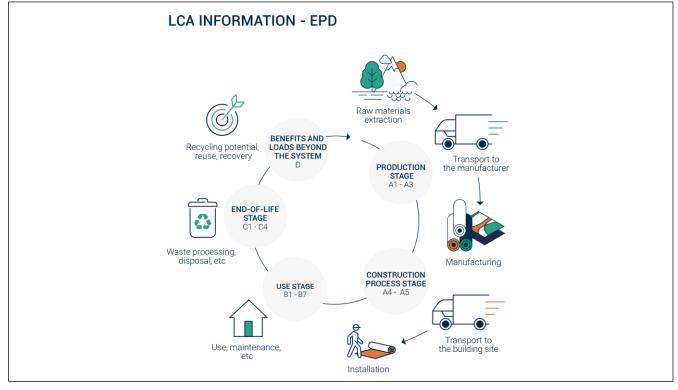

<u>More information</u>: The product is classified in accordance with EN ISO 10874, EN 685 and in reference to the FCSS (Floor Covering Standard Symbols) to be installed in various areas of application, such as: healthcare, education, commercial, education. The area of use according to the ISO 10874 is very heavy (34) for commercial classification and heavy (43) for industrial classification.





## Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

		duct age		nstruct cess st				U	se sta	ge			Er	nd of li	fe sta	ge	Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A1	A2	A3	A4	A5	B1	B2	<b>B</b> 3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	Х	х	х	Х	Х		х						х	х	Х	х	х
Geography					Europ	bean te	chnolo	gy and	proces	s cover	age						European
Specific data used	-	100%	100%	100%	100%	-	-	-	-	-	-	-	-	-	recy	6 For cling cess	100% For recycling process
Variation – products	-	-5% to 5%	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	-	-	-		n average arkett	-	-	-	-	-	-	-	-	-	-	-	-

## **Content information**

According to PCR 2019:14 v1.1, several similar products can be included in the same EPD if "differences between the mandatory impact indicators lower than  $\pm 10\%$  (concerning A1-A3) could be presented using the impacts of a representative product". The next table presents how products are grouped :

Product	Weight, kg/m <sup>2</sup>	Representative product group
iQ Eminent	2.80E+00	
iQ Granit	2.80E+00	iQ Range – Bio-attributed
iQ Optima	2.70E00	

The components for iQ Range compact group are detailed here:

	iQ Range	<ul> <li>Compact products</li> </ul>	
Product components	Weight, kg/m²	Post-consumer material, weight-%	Renewable material, weight-%
Bio-attributed PVC Suspension	1.28E+00	0%	43%
Plasticizer	4.04E-01	0%	0%
Epoxidised soya bean oil	1.27E-01	0%	83%
Mineral fillers	8.52E-01	0%	0%
Stabilizer CaZn	1.17E-03	0%	0%
Titanium dioxide	2.50E-02	0%	0%
Pigments	3.00E-03	0%	0%
Surface Treatment	1.90E-02	0%	0%
Post-installation and Post- consumer recycled flooring	1.20E-02	100%	0%
Additives	7.00E-03	0%	0%
TOTAL	2.76E+00	0,4%	23,8%
Packaging materials	Weight, kg/m <sup>2</sup>	Weight-% (versus the proc	duct)
Product Packaging Cardboard	4.02E-02	1,5	%
Product Packaging PEHD	1.52E-02	0,6	%
Product Packaging PELD	5.22E-03	0,2'	%
TOTAL	6.06E-02	2,2'	%



## Product manufacturing

## **Production process**

The production of the homogeneous resilient flooring is divided into the following stages:

- Extrusion: Raw materials is blended and extruded to obtain a malleable material.
- Calendering: Rolls are then calendered to get the desired shape.
- Pressing: Rolls are cut at the desired characteristics.

- Packaging: The final product is placed into cardboard cases with discs and plastic hangers positioned at the ends. The cardboard cases are then wrapped in plastic film.

## **Production waste**

Waste type	Amount	Unit
Internal recycling - Post manufacturing - Own production	7.81E-01	kg/m²
Non-hazardous waste to external incineration	4.07E-02	kg/m²
Non-hazardous waste to external recycling	3.95E-03	kg/m²
Non-hazardous waste to external treatment	4.78E-03	kg/m²
Hazardous waste to external recycling	5.70E-03	kg/m²
Hazardous waste to incineration	3.72E-03	kg/m²
Hazardous waste to external treatment	3.80E-03	kg/m²
Non-hazardous waste-water to external treatment	9.22E-04	kg/m²
Hazardous waste-water to external incineration	1.47E-04	kg/m²

NB: Post manufacturing recycling concerns the recycling of the losses inside the plant production. Therefore, there is no end-of-life impact on losses (except the recycling preparation). Post-manufacturing recycled content is 25%.

#### Health, safety and environmental aspects during production

Bioattributed iQ's production site complies with the ISO 14001 Environmental Management System and the ISO 9001 Quality Management System.

## **Delivery and installation**

## Delivery

The average distribution distance between the factory and the installation site is 766 km. It has been calculated considering the average distance between European countries where Tarkett is selling the iQ Range (Bio-attributed vinyl) products and the factory plant in Ronneby (Sweden). The distribution is made by truck.

### Installation

The product is glued on the subfloor, then the different parts of the flooring are welded together.

Description	Amount	Unit
Electricity consumption	3.35E-02	kWh/m²
Acrylic adhesive consumption	2.50E-01	kg/m²

#### Waste

During the installation approximately 10% of the flooring is lost as off-cuts. All flooring losses are sent to recycling.

## Packaging

50 % of the packaging materials goes to incineration and 50 % goes to landfill.

## Use Stage

## **Reference Service Life (RSL)**

For this product, the stated RSL is 1 year. It should be noted, however, that the service life of a Homogeneous polyvinylchloride floor covering may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with that defined by ISO 14041 and ISO10874 in accordance with the product's classification. **The service lifetime recommended by Tarkett is 30 years**.

## **Cleaning and maintenance**

Cleaning regime is based on traditional cleaning protocol integrating manual and mechanical operations. Depending on premises considered, these consumptions may vary. The considered regime fits high traffic areas. The maintenance scenario is :

- Common maintenance : 4 times a week
- Periodic maintenance : twice a year

Description	Amount	Unit
Electricity consumption	1.13E-01	kWh/year/m <sup>2</sup>
Water consumption	5.14E+00	L/year/m <sup>2</sup>
Detergent consumption	7.00E-02	L/year/m <sup>2</sup>

### Prevention of structural damage

To avoid excessive wear, usage should be restricted to the stated areas of application as outlined by the norm ISO 10874.



## End of Life

3 distinct End-of-Life scenarios have been modeled for iQ Range (Bio-attributed vinyl). Tarkett recommend using the ReStart program at End-of-Use to recycle the product. However, to showcase the value of Tarkett's recycling activities, environmental impacts of two alternative scenarios have been calculated.

#### 1/ Recycling.

100% of the iQ Range (Bio-attributed vinyl) can be recycled at its end of use stage, thanks to the ReStart® program, enabling Tarkett to collect installation losses and post-use flooring from construction sites to recycle it and/or re-use it as high quality raw material back in Tarkett plants. Tarkett has developped a new technology that cleans, shreds and recycles previously unusable post-consumer vinyl. Thus, iQ Range (Bio-attributed vinyl) is recycled back at the Ronneby plant, and the transport between construction site and recycling facility is 766 km by truck. Environmental impacts of recycling are presented in module **C/1**.

#### 2/ Incineration with energy recovery

Incineration with energy recovery is a rising waste management method in many of the countries in wich iQ Range (Bio-attributed vinyl) is sold. While Tarkett wishes to recycle 100% of sold iQ Range (Bio-attributed vinyl). Incineration with energy recovery is an alternative option if recycling is impossible. Environmental impacts of incineration with energy recovery are presented in module **C/2**.

#### 3/ Landfilling

Landfilling waste is still a proheminent waste management scenario. This option is however not recommanded by Tarkett. Environmental impacts of landfilling are presented in module **C/3**.

## Benefits and loads beyond system boundary

#### 1/ Recycling.

The benefit is due to the recycling post-use flooring that allows avoiding the emissions of virgin materials. iQ Range (Bio-attributed vinyl) can be 100% recycled at post-installation and post-consumer stage. Benefits from avoided raw material production and avoided transport are calculated in module **D/1**.

#### 2/ Incineration with energy recovery

Benefits from installation offcuts recycling and incineration energy recovery are calculated in D/2.

#### 3/ Landfilling

Benefits accounted in this scenario exclusively come from installation offcuts recycling and are presented in  $\ensuremath{\text{D/3}}$ 





# **Results for product group**

## IQ Range (Bio-attributed vinyl)

PAGE 11/18



Acronyms



## **Environmental Information**

#### Potential environmental impact in case of recycling at End-of-use

		Res	sults per	functior	nal or de	clared u	nit in cas	e of inci	neration	- iQ Ran	ge (Bioa	ttributed	vinyl)			
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
GWP-total	kg CO <sub>2</sub> eq.	3.32E+00	2.54E-01	1.30E+00	0.00E+00	2.28E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.18E-01	5.95E-01	2.14E+00	-5.51E+00
GWP-fossil	kg CO <sub>2</sub> eq.	4.57E+00	2.54E-01	1.18E+00	0.00E+00	1.27E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.17E-01	5.94E-01	0.00E+00	-4.64E+00
GWP- biogenic	kg CO <sub>2</sub> eq.	-2.14E+00	1.04E-04	3.49E-02	0.00E+00	4.53E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.52E-04	4.88E-05	2.14E+00	3.60E-03
GWP- Luluc	kg CO2 eq.	8.95E-01	8.89E-05	9.00E-02	0.00E+00	1.00E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.16E-04	3.28E-06	0.00E+00	-8.74E-01
ODP	kg CFC 11 eq.	2.62E-06	5.77E-08	3.43E-07	0.00E+00	1.73E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.40E-07	1.41E-09	0.00E+00	-2.38E-06
AP	mol H⁺ eq.	2.41E-02	1.03E-03	1.13E-02	0.00E+00	1.27E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.52E-03	1.37E-04	0.00E+00	-2.37E-02
EP-freshwater	kg P eq	2.76E-03	1.86E-05	5.69E-04	0.00E+00	8.39E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.52E-05	1.69E-06	0.00E+00	-2.76E-03
EP-freshwater	kg PO4 <sup>3-</sup> eq	8.47E-03	5.72E-05	1.75E-03	0.00E+00	2.58E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.39E-04	5.20E-06	0.00E+00	-8.48E-03
EP-marine	kg N eq.	9.90E-03	3.08E-04	1.82E-03	0.00E+00	1.10E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.56E-04	7.71E-05	0.00E+00	-9.35E-03
EP-terrestrial	mol N eq.	5.99E-02	3.37E-03	1.37E-02	0.00E+00	4.02E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.27E-03	6.58E-04	0.00E+00	-5.68E-02
POCP	kg NMVOC eq.	1.22E-02	1.03E-03	4.04E-03	0.00E+00	5.96E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.53E-03	1.59E-04	0.00E+00	-1.16E-02
ADP- minerals&metals*	kg Sb eq.	4.05E-04	6.88E-06	5.63E-05	0.00E+00	5.24E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.67E-05	1.99E-07	0.00E+00	-4.00E-04
ADP-fossil*	MJ	1.29E+02	3.83E+00	2.49E+01	0.00E+00	1.88E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.31E+00	1.08E-01	0.00E+00	-6.94E+01
WDP	m <sup>3</sup>	7.34E+00	1.07E-02	1.37E+00	0.00E+00	2.28E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.59E-02	2.82E-02	0.00E+00	-6.23E+00

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, Accumulated Exceedance; Pormarine = Eutrophication potential, Accumulated Exceedance; Pormation potential = Eutrophication potential, Accumulated Exceedance; Pormation potential = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption





## **Environmental Information**

#### Potential environmental impact in case of recycling at End-of-use

				Results	per functi	ional or d	eclared u	nit in case	e of incine	eration - i	Q Range	Compact				
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
PERE	MJ	1.89E+01	5.41E-02	2.86E+00	0.00E+00	8.69E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.31E-01	4.12E-03	0.00E+00	-1.63E+01
PERM	MJ	3.32E+01	0.00E+00	3.32E+00	0.00E+00	7.29E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-3.32E+01
PERT	MJ	5.22E+01	5.41E-02	6.19E+00	0.00E+00	1.60E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.31E-01	4.12E-03	0.00E+00	-4.96E+01
PENRE	MJ	1.47E+02	3.83E+00	2.66E+01	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.31E+00	1.08E-01	0.00E+00	-8.66E+01
PENRM	MJ.	4.77E-01	0.00E+00	7.93E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-4.77E-01
PENRT	MJ	1.47E+02	3.83E+00	2.66E+01	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.30E+00	1.08E-01	0.00E+00	-8.71E+01
SM	kg	1.03E+00	0.00E+00	1.03E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-7.51E-01
RSF	MJ	6.52E+00	0.00E+00	6.52E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-6.52E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	2.04E-01	3.96E-04	3.72E-02	0.00E+00	1.04E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.61E-04	8.79E-04	0.00E+00	-1.67E-01

Acronyms PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable primary energy resources; SM = Use of non-renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





#### Waste production and output flows in case of recycling at End-of-use

5.46E+00 2.54E-01 1.27E+00 0.00E+00 2.27E-01

#### Waste production

	Results per functional or declared unit in case of incineration - iQ Range Compact															
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
Hazardous waste disposed	kg	1.75E-01	2.47E-03	1.10E-01	0.00E+00	1.31E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.98E-03	1.42E-02	0.00E+00	-1.40E-01
Non-hazardous waste disposed	kg	1.21E+00	2.02E-01	6.23E-01	0.00E+00	5.45E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.89E-01	3.56E-03	0.00E+00	-1.13E+00
Radioactive waste disposed	kg	9.97E-04	2.61E-05	1.43E-04	0.00E+00	1.01E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.34E-05	2.82E-07	0.00E+00	-5.11E-05

#### **Output flows**

GWP-GHG

kg CO<sub>2</sub> eq.

-			Results	per fun	ctional o	or declar	red unit	in case	of incine	eration -	iQ Rang	ge Comp	oact			
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1/1	C2/1	C3/1	C4/1	D/1
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	2.73E-02	0.00E+00	2.78E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.48E+00	-2.34E-02
Materials for energy recover	ry kg	7.06E-04	0.00E+00	7.06E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.50E-01	0.00E+00	-7.06E-04
Exported energy, electricity	/ MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.45E-01	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.31E+00	0.00E+00	0.00E+00
dditional indicator																
			Results	per fun	ctional	or decla	red unit	in case	of incin	eration	- iQ Ran	ge Com	pact			
ndicator Unit	A1-/	A3 A4	A	5 В	1 E	32	B3	B4	B5	B6	B7	C1/1	C2/	I C3/	'1 C4/1	D/1

0.00E+00 0.00E+00 0.00E+00

0.00E+00

0.00E+00

6.17E-01

5.94E-01 0.00E+00

-5.52E+00

0.00E+00



## Additional information – Potential impacts and flows in case of incineration

Results per functional or declared unit in case of incineration - iQ Range Compact							
Indicator Unit C1/2 C2/2 C3/2 C4/2 D/2							
GWP-total	kg CO <sub>2</sub> eq.	0.00E+00		6.41E+00	3.48E-03	-3.09E+00	
GWP-fossil	kg CO₂ eq.	0.00E+00	1.50E-02		3.48E-03	-2.99E+00	
GWP- biogenic	kg CO <sub>2</sub> eq.	0.00E+00	6.12E-06	2.15E+00	2.33E-06	5.87E-03	
GWP- Luluc	kg CO <sub>2</sub> eq.	0.00E+00	5.24E-06	5.85E-04	9.69E-07	-9.13E-02	
ODP	kg CFC 11 eq.	0.00E+00	3.41E-09	1.94E-07	1.43E-09	-5.61E-07	
AP	mol H⁺ eq.	0.00E+00	6.13E-05	4.57E-03	3.30E-05	-1.23E-02	
EP-freshwater	kg P eq	0.00E+00	1.10E-06	2.69E-04	3.57E-07	-1.14E-03	
EP-marine	kg N eq.	0.00E+00	3.37E-06	8.25E-04	1.10E-06	-3.49E-03	
EP-terrestrial	mol N eq.	0.00E+00	1.84E-05	1.35E-03	1.14E-05	-2.48E-03	
POCP	kg NMVOC eq.	0.00E+00	2.01E-04	1.25E-02	1.25E-04	-2.13E-02	
ADP-minerals&metals*	kg Sb eq.	0.00E+00	6.16E-05	3.42E-03	3.63E-05	-5.71E-03	
ADP-fossil*	MJ	0.00E+00	4.06E-07	3.11E-05	3.18E-08	-4.32E-05	
WDP	m <sup>3</sup>	0.00E+00	2.26E-01	9.20E+00	9.72E-02	-4.90E+01	
Resul	ts per functiona	l or declar	ed unit in	case of in	cineratior	- iQ Range Compact	
Indicator	Unit	C1/2	C2/2	C3/2	C4/2	D/2	
PERE	MJ	0.00E+00	3.19E-03	8.25E-01	7.86E-04	-5.00E+00	
PERM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-3.32E+00	
PERT	MJ	0.00E+00	3.19E-03	8.25E-01	7.86E-04	-8.33E+00	
PENRE	MJ	0.00E+00	2.26E-01	9.19E+00	9.72E-02	-5.05E+01	
PENRM	MJ.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-4.77E-02	
PENRT	MJ	0.00E+00	2.26E-01	9.18E+00	9.72E-02	-5.05E+01	
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.72E-01	
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-6.52E-01	
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
FW	m <sup>3</sup>			2.56E-01		-3.26E-02	
Resul	ts per functiona	l or declar	ed unit in	case of in	cineration	- iQ Range Compact	
Indicator	Unit	C1/2	C2/2	C3/2	C4/2	D/2	
Hazardous waste disposed	kg	0.00E+00	1.46E-04	1.59E+00	5.73E-05	-4.02E-02	
Non-hazardous waste disposed	kg	0.00E+00	1.19E-02	3.13E-01	6.60E-01	-5.82E-01	
Radioactive waste disposed	kg	0.00E+00	1.54E-06	4.41E-05	6.38E-07	-1.92E-04	
Results per functional or declared unit in case of incineration - iQ Range Compact							
Indicator	Unit	C1/2	C2/2	C3/2	C4/2	D/2	
Components for re-use Material for recycling	kg kg	0.00E+00 0.00E+00		2.87E+00 6.87E+00		-7.06E-05 0.00E+00	
	-						
Materials for energy recovery Exported energy, electricity	kg MJ	0.00E+00		2.02E+01 0.00E+00		0.00E+00	
Exported energy, electricity Exported energy, thermal	MJ	0.00E+00		0.00E+00		0.00E+00 0.00E+00	
Exported energy, thermal	IVIJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	



#### Additional information – Potential impacts and flows in case of landfilling

Results per functional or declared unit in case of landfilling - iQ Range Compact						
Indicator	Unit	C1/3	C2/3	C3/3	C4/3	D/3
GWP-total	kg CO <sub>2</sub> eq.	0.00E+00	1.50E-02	0.00E+00	2.39E+00	-5.23E-01
GWP-fossil	kg CO <sub>2</sub> eq.	0.00E+00	1.50E-02	0.00E+00	2.46E-01	-4.34E-01
GWP- biogenic	kg CO <sub>2</sub> eq.	0.00E+00	6.12E-06	0.00E+00	2.14E+00	2.56E-05
GWP- Luluc	kg CO <sub>2</sub> eq.	0.00E+00	5.24E-06	0.00E+00	6.20E-06	-8.94E-02
ODP	kg CFC 11 eq.	0.00E+00	3.41E-09	0.00E+00	9.33E-09	-2.39E-07
AP	mol H⁺ eq.	0.00E+00	6.13E-05	0.00E+00	2.26E-04	-2.28E-03
EP-freshwater	kg P eq	0.00E+00	1.10E-06	0.00E+00	2.75E-06	-2.67E-04
EP-marine	kg N eq.	0.00E+00	3.37E-06	0.00E+00	8.46E-06	-8.21E-04
EP-terrestrial	mol N eq.	0.00E+00	1.84E-05	0.00E+00	1.18E-03	-9.38E-04
POCP	kg NMVOC eq.	0.00E+00	2.01E-04	0.00E+00	9.03E-04	-5.61E-03
ADP-minerals&metals*	kg Sb eq.	0.00E+00	6.16E-05	0.00E+00	3.10E-04	-1.12E-03
ADP-fossil*	MJ	0.00E+00	4.06E-07	0.00E+00	2.23E-07	-4.01E-05
WDP	m <sup>3</sup>	0.00E+00	2.26E-01	0.00E+00	6.80E-01	-7.45E+00

Results per functional or declared unit in case of landfilling - iQ Range Compact

Indicator	Unit	C1/3	C2/3	C3/3	C4/3	D/3
PERE	MJ	0.00E+00	3.19E-03	0.00E+00	2.61E-02	-1.84E+00
PERM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-3.32E+00
PERT	MJ	0.00E+00	3.19E-03	0.00E+00	2.61E-02	-5.16E+00
PENRE	MJ	0.00E+00	2.26E-01	0.00E+00	6.80E-01	-9.18E+00
PENRM	MJ.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-4.77E-02
PENRT	MJ	0.00E+00	2.26E-01	0.00E+00	6.80E-01	-9.23E+00
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.72E-01
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-6.52E-01
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	0.00E+00	2.34E-05	0.00E+00	8.38E-04	-1.86E-02

Results per functional or declared unit in case of landfilling - iQ Range Compact

	•					
Indicator	Unit	C1/3	C2/3	C3/3	C4/3	D/3
Hazardous waste disposed	kg	0.00E+00	1.46E-04	0.00E+00	6.75E-04	-1.41E-02
Non-hazardous waste disposed	kg	0.00E+00	1.19E-02	0.00E+00	3.01E+00	-1.10E-01
Radioactive waste disposed	kg	0.00E+00	1.54E-06	0.00E+00	4.44E-06	-1.62E-05
Results per functional or declared unit in case of landfilling - iQ Range Compact						

Indicator	Unit	C1/3	C2/3	C3/3	C4/3	D/3
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-2.34E-03
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-7.06E-05
Exported energy, electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



#### RONNEBY ELECTRICITY MIX.

The electricity mix for Ronneby in 2020 was 100% nuclear. Datasets on Swedish electricity mix production were therefore adapted to better fit the electricity consumption. The Carbon footprint for 1Kwh of electricity purchased is shown as follows;

Indicator	Unit	
GWP-Total	kg CO₂ eq	0,0157

#### Information on biogenic carbon content for all groups

Results per functional or declared unit							
BIOGENIC CARBON CONTENT Unit QUANTITY							
Biogenic carbon content in product	kg C	0,584					
Biogenic carbon content in packaging	kg C	<0,012					

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.

## References

#### General Programme Instructions of the International EPD® System. Version 3.01.

PCR 2019:14. Name. Version Other references to be added, e.g. c-PCR used

