



SUSTAINABILITY ATTRIBUTES

Circular Economy and Climate Change





Good Materials








Indoor Air Quality



LCA Information above is based on the product's Environmental Product Declaration (EPD) EPD Number: EPD-IES-0017090

EPD number : EPD-1ES-0017090 EPD comparison should be conducted by experts only

LIFE CYCLE ASSESSMENT

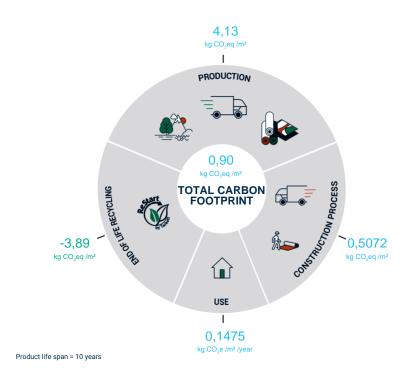



BREEAM INTERNATIONAL NEW CONSTRUCTION 2016



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
HEA 01 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
HEA 02 - Indoor Air Quality	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 60 µg/m3	Figure 1 and
HEA 05 - Acoustic Performance	Performance required for reverberation time No specific requirement at product level	α=0.15 ABSORPTION
MAT 01 - Life Cycle Impacts	EPDs available	EPD [®]
MAT 03 - Responsible Sourcing of Construction Products	ISO 14001 certified	ISO 14001
MAT 06 - Material Efficiency	Ingredients verified by a third party or Product composed of recycled content	WILLIA, HALTH-SMITSHAT
WST 01 - Waste Management	Avoid sending waste to landfill No specific requirement at product level	economic Ready
WST 06 - Functional Adaptability	Encourage building adaptability No specific requirement at product level	GLUE FREE MODULAR PRODUCTS





LEED v4.1 Building Design and Construction

OFFICIATION OFFICE		THE TARKETT REGRONGE
CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MR - Environmental Product Declarations	EPDs available	EPD [®]
MR - Sourcing of Raw Materials	Signatory of the UN Global Compact or Product composed of recycled content or Recyclable at end-of-life or Bio-sourced materials	CIRCULAR SELECTION WE SUPPORT
MR - Material Ingredients	Ingredients verified by a third party or- Cradle to Cradle® certification at bronze level or higher	CENTROS CARDIO TO CARDO TO CONTROL HEALTS. STATEMENT ENTER TO CO
MR - Construction and Demolition Waste Management	Avoid sending waste to landfill No specific requirement at product level	FOOT ME. PROCESSES
EQ - Low Emitting Materials and Indoor Air Quality Assessment	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3 Decrease the concentration of particles in the air	CA+
EQ - Interior Lighting and Daylight	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
EQ - Acoustic Performance	Performance required for reverberation time No specific requirement at product level	α=0.15 Sound α=0.15 ABSORPTION





WELL BUILDING STANDARD v2

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
L02 - Visual Lighting Design and L 06 - Daylight Simulation	Best practices in daylighthing andartificial lighting design No specific requirement at product level	VISUAL COMFORT
S04 - Reverberation Time	Performance requirement for reverberation time No specific requirement at product level	α=0.15 SQUND ABSORPTION
S07 - Impact Noise Management	Best practices in impact noise reduction- No specific requirement at product level	22 _{de} MEACT NOISE
X01, X02 and X05 - Material Restrictions, Interior Hazardous Materials Management and Enhanced Material Restrictions	Asbestos < 1000 ppm Halogenated flame retardants < 100 ppm PFAS < 100 ppm Lead < 100 ppm Cadmium < 100 ppm Mercury < 100 ppm Orthophthalates < 100 ppm Higher amounts are allowed if required by local code	Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product.
X06 - VOC Restrictions	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 124 µg/m3 (E1)	
X07 - Materials Transparency	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	credit to cradie
X08 - Materials Optimization	Ingredients verified by a third party or Cradle to Cradle® certification at silver level or higher	credit to cradie



SKA PATING OFFICES 1.2 SKArating®

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE	
Soft flooring	Recycled content > 50% or Renewable or natural content > 50% or Cradle to Cradle® certification at silver level or higher or EPDs available	CERTIFIC OF CRAFFIC AND CRAFFI	EPD [®]
Reduce floor finishes sent to landfill	Avoid sending waste to landfill No specific requirement at product level	STOTO ARE POST-UNIT	Ready
Low VOC finishes	TVOC at 28 days ≤ 100 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3 or Ingredient disclosure	TO DUM TO THE MENT OF THE MENT	MATERIAL . REALTH. STATEMENT
Daylighting	Best practices in daylighting design No specific requirement at product level		VISUAL COMFORT
Acoustic Design	Performance required for reverberation time- No specific requirement at product level		α=0.15 SOUND ABSORPTION



DGNB System - New buildings Version 2020 International

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
ENV1.1 - Building Life Cycle Assessment	EPDs available	EPD [®]
ECO2.1 - Flexibility and Adaptability	Products that can be easily removed No specific requirement at product level	GLUE FREE MODULAR PRODUCTS
SOC1.2 - Indoor Air Quality	Indoor air quality measurement after construction work No specific requirement at product level	LOW FORMALDEHYDE EMISSIONS
SOC1.3 - Acoustic Comfort	Best practices in impact noise reduction- No specific requirement at product level	22 _{dB} MEDUCTION α =0.15 SSURPTION
SOC1.4 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
TEC1.6 - Ease of Recovering and Recycling	Efficient use of resources	Poorting Ready





HQE BÂTIMENT DURABLE v4

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Qualité de l'air intérieur	Mesure de polluants dans l'air après travaux	A+ and the second secon
Confort Acoustique	Bonnes pratiques sur l'acoustique au sein d'une pièce et entre pièces Pas d'exigence spécifique au niveau des produits	CZ=0.15 SQUARPTION
Confort Visuel	Bonnes pratiques sur l'éclairage naturel et artificiel Pas d'exigence spécifique au niveau des produits	VISUAL COMFORT
Déchets	Enviter l'envoi à la décharge Pas d'exigence spécifique au niveau des produits	Post call



MILJÖBYGGNAD		BYGGNAD CERTIFIERAD SVERIGE	
CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE	
Indicator 13 (V3.0 & 3.1) Indicator 15 (V4.0)	Composition declared according to CLP/REACH None classified compounds are publicly declared if they make up >2% of	See available aBVD for Swedish adapta	
	composition	See available eBVD for Swedish adaptation	tion.

The Green Building Card is used as a reference only for projects at design stage. This document by itself is not enough to validate the Green Building Certification requirements and manufacturer's documentation must be provided. In order to access the product certificates, please contact your TARKETT's sales representative.



MILJÖ