



Hausmann classic 095

Ideal for heavy traffic commercial areas, especially in Education, Healthcare and Aged Care facilities, RUBY 70 is available in both compact and acoustic versions. The new embossing has been developed to reduce maintenance and save time and money. RUBY 70 offers trendy colours and decors with a large range of LRVs allowing to play with light and contrast to create spaces for all.



PHTHALATE FREE



Traffic & slip resistance

0.70 mm wearlayer
R10 slip resistance



33 decors



Available in

- Acoustic (19dB)
- Compact



Easy maintenance

TopClean™ PUR
No wax, no polish



LRV* between
20 - 40%
For visual comfort

*Light Reflectance Value

Ruby 70 / Ruby 70 Acoustic

TECHNICAL DATA	STANDARD	RUBY 70	RUBY 70 ACOUSTIC
Classification	Norm	Tarkett value	Tarkett value
Product type	ISO 10582 ISO 11638	Heterogeneous poly(vinyl chloride) floor coverings	Heterogeneous poly(vinyl chloride) flooring on foam
Commercial classification	ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy	-
Binder content	ISO 10582 ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett value	Tarkett value
Wear layer thickness	EN ISO 24340	0.70 mm	0.70 mm
Total thickness	EN ISO 24346	2 mm	3 mm
Total weight	EN ISO 23997	3000 g/m ²	2500 g/m ²
Surface treatment	-	TopClean™	TopClean™
Installation method	-	Glue-Down	Glue-Down
Performance for CE Marking	Norm	Tarkett value	Tarkett value
Declaration of Performance	EN 14041	0131-0038-DoP-2014-10	0131-0056-DoP-2015-01
Reaction to fire	EN ISO 13501-1	Bi-s1	Cr-s1
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.02 m ² ·K/W	Approx. 0.04 m ² ·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)
Technical Performance	Norm	Tarkett value	Tarkett value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm	Required value: ≤ 0.20 mm
Curly resilient to heat	EN ISO 23999	≤ 18 mm	≤ 18 mm
Dimensional stability	EN ISO 23999	≤ 0.10 %	≤ 0.10 %
Slip resistance	EN 16165	R10	R10
Impact sound reduction	EN ISO 717/2 NF S31-074	4dB Class C	19dB Class A
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating	-	Suitable (maximum 27°C)	Suitable (maximum 27°C)
Sustainability Performance	Norm	Tarkett value	Tarkett value
Recyclability through ReStart®	-	Recyclable	Recyclable
Recycled content	-	31 %	-
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-	6.83 kg CO ₂ eq / m ²	-
TVOC emissions after 28 days	EN 16516	Gold (≤ 100 µg/m ³)	Gold (≤ 100 µg/m ³)
Dimensions and designs	-	-	-
Roll	-	2 x 23 m 4 x 23 m	2 x 23 m -
Number of designs available	-	33	15

The above information is subject to modification for the benefit of further improvement. (02/24)
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Ruby 70	Welding Rod	NCS	LRV %	Ruby 70	Welding Rod	NCS	LRV %	Ruby 70	Welding Rod	NCS	LRV %	Ruby 70	Welding Rod	NCS	LRV %
25098 090	1287 560	S 4010-Y30R	26.75	25098 097	1287 572	S 2502-Y20R	40.03	25098 118	1287 174	S 4010-Y30R	32.61	25098 177	1287 780	S 6010-Y30R	15.25
25098 091	1287 690	S 3020-Y20R	29.39	25098 098	1287 707	S 3005-Y20R	40.88	25098 134	1287 153	S 4020-Y20R	25.84	25098 213	1291 839	S 2502-Y20R	35.38
25098 092	1287 153	S 4020-Y30R	24.51	25098 099	1287 573	S 3505-Y20R	43.24	25098 136	1287 373	S 5005-Y30R	26.16	25098 288	1287 733	S 3010-Y30R	35.06
25098 093	1287 690	S 4020-Y30R	27.86	25098 100	1287 007	S 3500-A	36.38	25098 172	1287 585	S 6002-Y30R	12.70	25098 289	1287 557	S 3010-Y20R	39.95
25098 094	1292 771	S 3502-Y50R	59.27	25098 110	1287 526	S 7000-N	10.07	25098 174	1287 477	S 4020-Y20R	21.14	25145 043	1294 071	S 4502-Y80R	26.85
25098 095	1287 174	S 3010-Y30R	32.95	25098 112	1287 457	S 4502-R	26.57	25098 175	1287 690	S 4020-Y20R	27.66	25145 046	1287 614	S 7000-N	8.34
25098 096	1287 557	S 3010-Y10R	35.43	25098 116	1287 540	S 6010-Y30R	15.97	25098 176	1287 733	S 4010-Y10R	31.94	25145 049	1287 591	S 4005-Y	30.20

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 • Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 4257 9000 • France: Tarkett SAS - Tel. +33 1 41 20 42 49
 • Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 • Netherlands: Tarkett BV - Tel. +31 416 685 491
 • Norway: Tarkett AS - Tel. +47 28 28 92 00 • Portugal: Tarkett SA - Tel. +351 21 25 18 20 • Spain: Tarkett Floors S.L. - Tel. +34 914 951 400 • Sweden: Tarkett Sverige AB - Tel. +46 71 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24
 • Turkey: Tarkett Turkey - Tel. +90 212 213 45 85 • United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 450400 • EASTERN EUROPE: Baltic Countries: Tarkett Ltd - Tel. +372 51 58800 • Latvia: Tel. +371 26 112011 • Lithuania: Tel. +370 7 57 02020 • Czech Republic: Tarkett s.r.o. s.p.a.
 • Tel. +420 271 001 600 • Hungary: Tarkett Polska Sp. z o.o. mgaryarszaj földkeze - Tel. +36 1 437 8150 • Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737
 • Slovakia: Tarkett Slovakia Sp. s r.o. organizacna zlozka - Tel. +421 2 42031 317 • South East Europe: Tarkett Ltd - Tel. +30 21 25 19 00 • Asia AND Oceania: Australia: Tarkett Australia Pty Ltd - Tel. +61 8 88 53 71 00
 • China: Tarkett Floor Coverings (Shanghai) Co. Ltd. - Tel. +86 (21) 609 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 2750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett International - Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East - Tel. +961 1 51 3363/4 • Israel: Tarkett International - +33 1 41 20 41 01
 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5111 / Johnsville - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 172 ■ LATIN AMERICA: Brazil: Tarkett Brasil - Tel. +55 12 3954 7108 • Argentina - Chile - Uruguay: Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +51 1 85494 0069 • Mexico / Central America: Tarkett Mexico - Tel. +52 11 98410 9310

professionals.tarkett.com




Printed on recyclable paper and cardboard

Customer Ref: 162650000

Ruby 70 / Ruby 70 Acoustic - 204001 0123 - 02/24



Ruby 70
Ruby 70 Acoustic

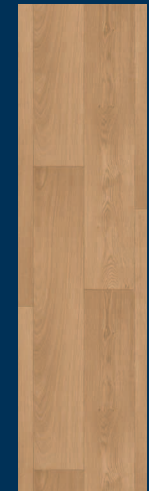

HETEROGENEOUS VINYL COMPACT & ACOUSTIC

Ruby 70
Ruby 70 Acoustic

HETEROGENEOUS VINYL COMPACT & ACOUSTIC

Value for money high traffic resistant flooring



Uno passion 102 - Uno sun 101 - Nature fresh blue 055 - Nature light grege 078 - Nature spring green 068

Ruby 70 & Ruby 70 Acoustic

A Ruby Acoustic

A Ruby Acoustic

A Ruby Acoustic

A Ruby Acoustic

