

Excellence

HETEROGENEOUS FLOORS,
WALLS AND STAIRS

The colour
chart
that sets
the tone

 Tarkett

4	Design inspiration
12	XXL designs
18	A global solution
22	Create inclusive spaces
26	Expertise and sustainability
34	Excellence – glue-down and loose-lay floors
40	Platinum – heavy-duty flooring
44	ProtectWall – wall coverings
48	Tapiflex Stairs – stair solutions
52	Accessories
62	Design overview
74	Tables and codes
78	Technical datasheets



Contents

The colour chart that sets the tone

Introducing our new heterogeneous vinyl walls and floors range, a collection that resonates with architects and designers seeking authenticity in their spaces. From lifelike wood textures to timeless terrazzo, concrete and mineral inspirations, our collection offers classic and contemporary options. Explore a vast array of modern colours and graphics – the essence of the Excellence design story – to bring your architectural visions to life.



Wood

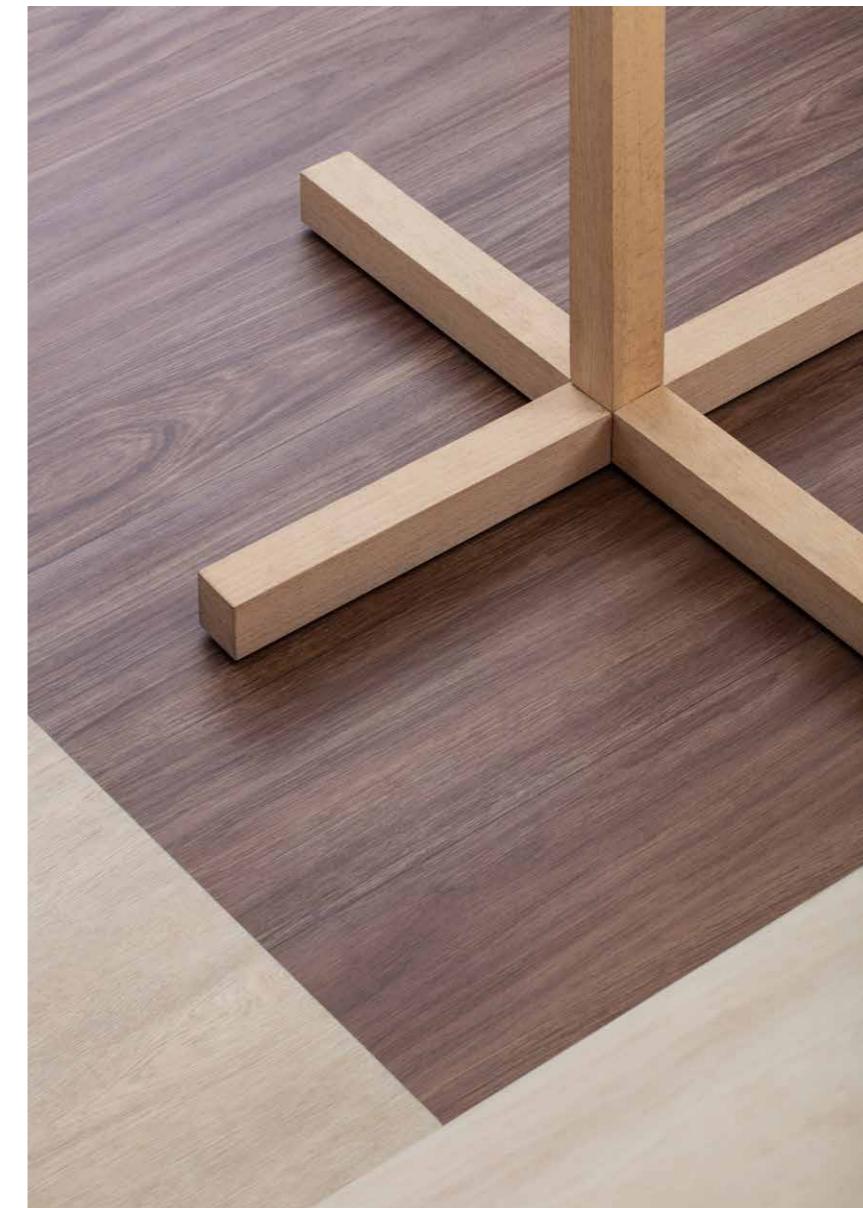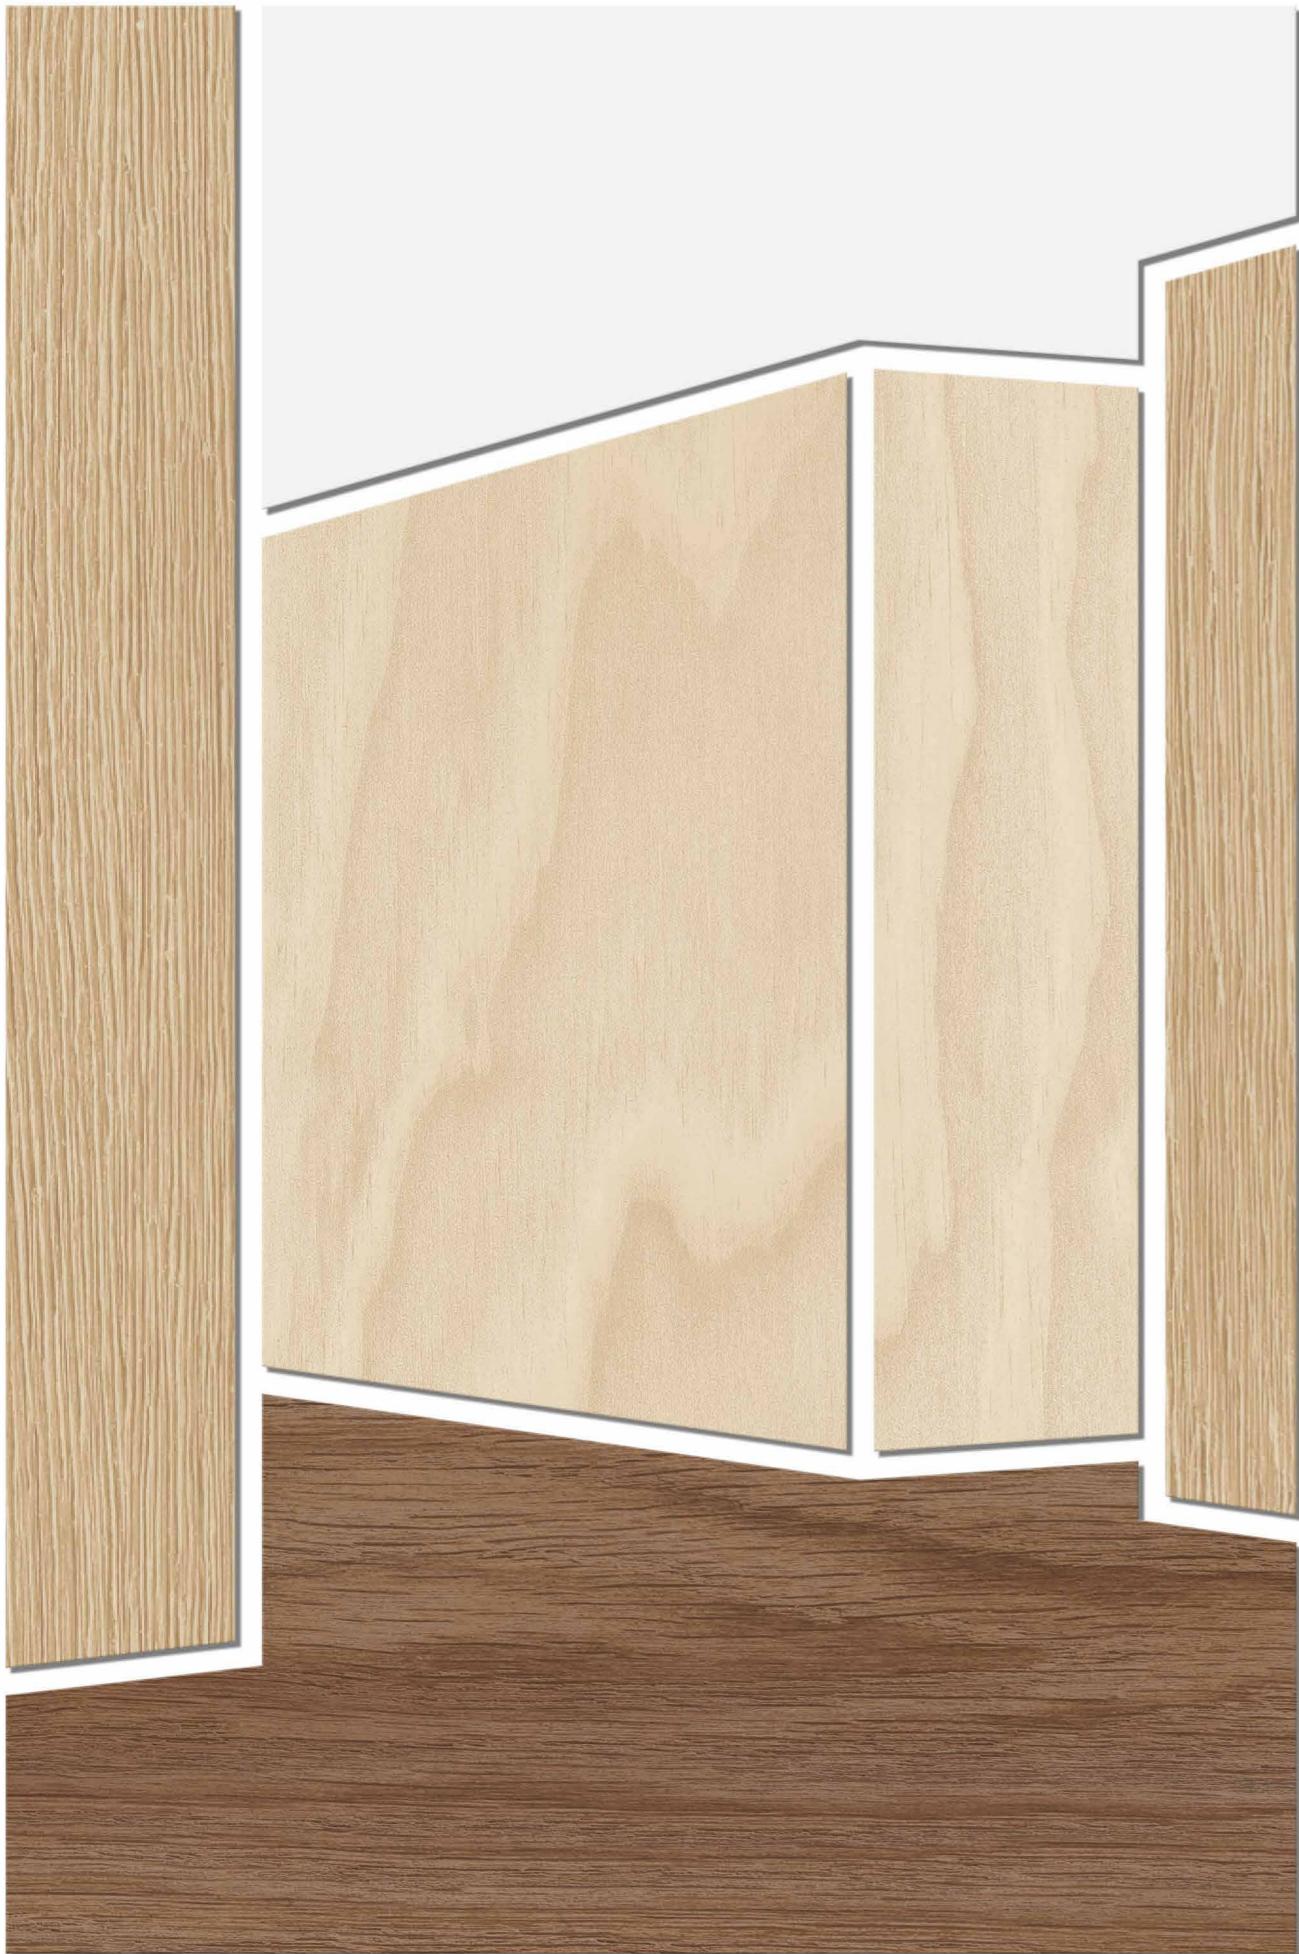


**Hyperrealism
of natural hues**

The different wood patterns faithfully capture the authenticity and diverse tones of wood.

Minerals



**Elegance of stones,
modernity of concrete**

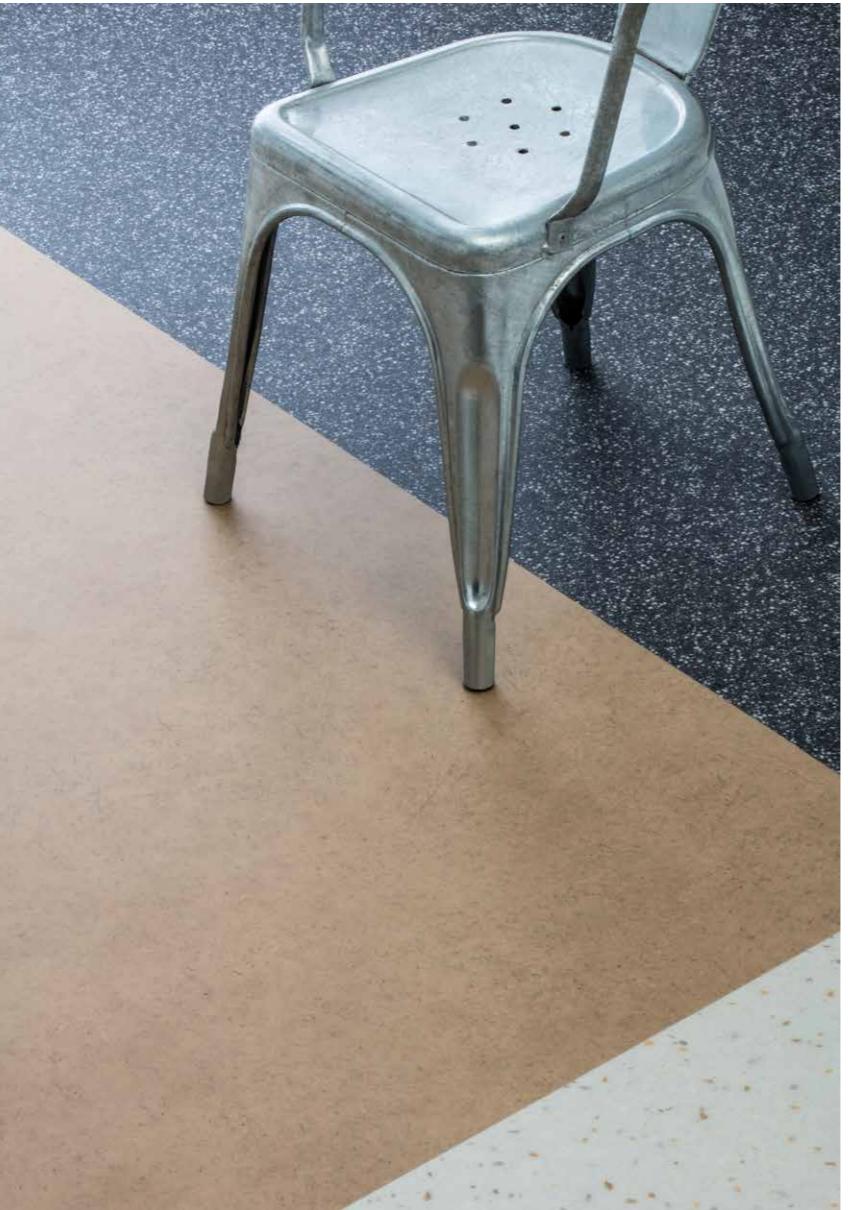

The designs draw inspiration from a spectrum of minerals such as stone, marble, basic grey or coloured concrete, as well as the aesthetic appeal of terrazzo.



Colours

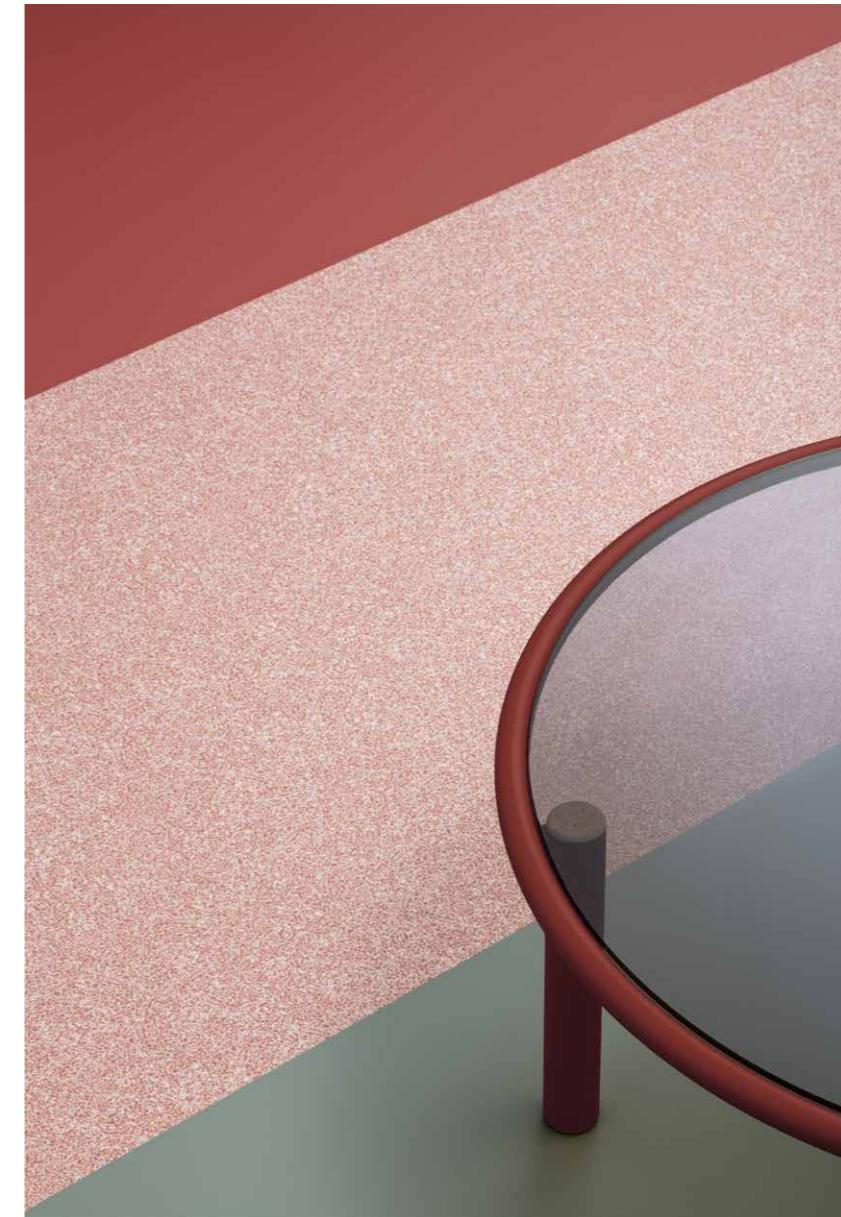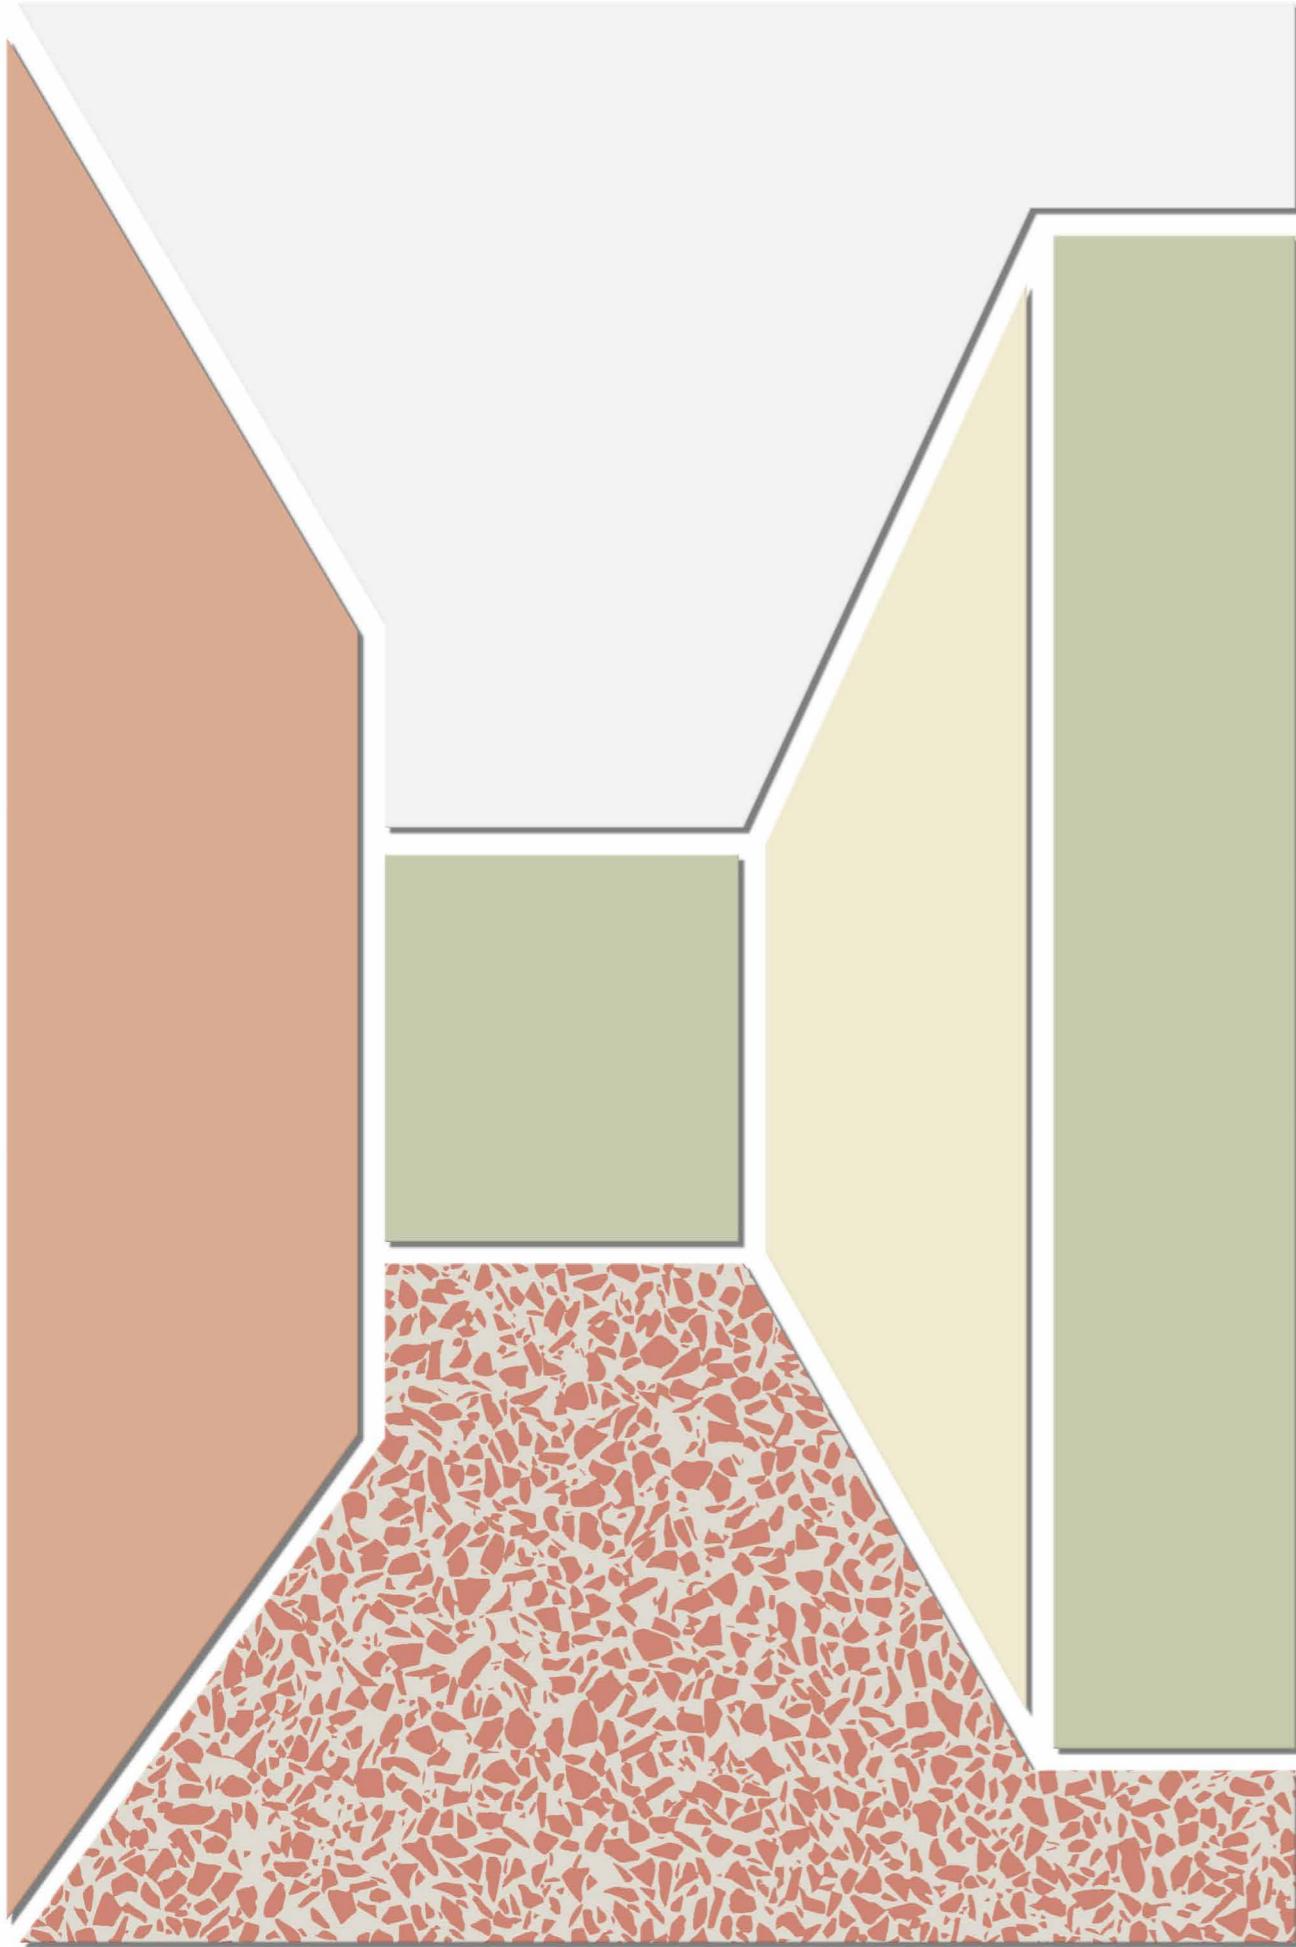

Contemporary colours and graphics

Introducing new uni-colors with contemporary hues and easy-to-live-with tones – together with a mix of both bold and subtly recognisable graphics.



For XXL spaces

XXL CARRARA
GRANDE natural



XXL BRECCIATONE
grey



XXL BRECCIA
CINO
nude



XXL OAK
natural



XXL OAK
golden



**Rediscover
the limitless naturality
of the elements**

Find immense inspiration in the
seamless replication of XXL marble,
wood or stone patterns on floors
spanning up to 6 metres in length.

XXL designs



Standard design



- Authenticity and extra scale to reflect the true diversity of the natural world
- Reproducing the unpredictable beauty of nature
- Unique timeless parquet decor
- Extra realism with 200×20 cm planks
- Available in a standard range





16

17



A global solution

Excellence

The multi-option floor range, suitable for all segment needs. With compact or acoustic performances and a large array of design choices, including XXL designs.

Excellence Genius

Floors designed with the loose-lay installation method for a lower carbon footprint and when quick renovation is needed.

Platinum

Extreme resistance floors for highly demanding environments such as those in healthcare facilities.


ProtectWall

Heavy-duty wall covering for healthcare and education environments. Offers high protection from rough treatment and the need for repeated renovation.

Tx Stairs & Accessories

The complementary stairs solutions ensure a safer step in all settings and are available with a complete selection of accessories.

Explore a comprehensive range of **technical solutions tailored for high-traffic environments, spanning floors, walls and stairs**. Each collection is meticulously crafted to deliver optimal sustainable credentials while providing a wide spectrum of inspiration and designs that match perfectly.

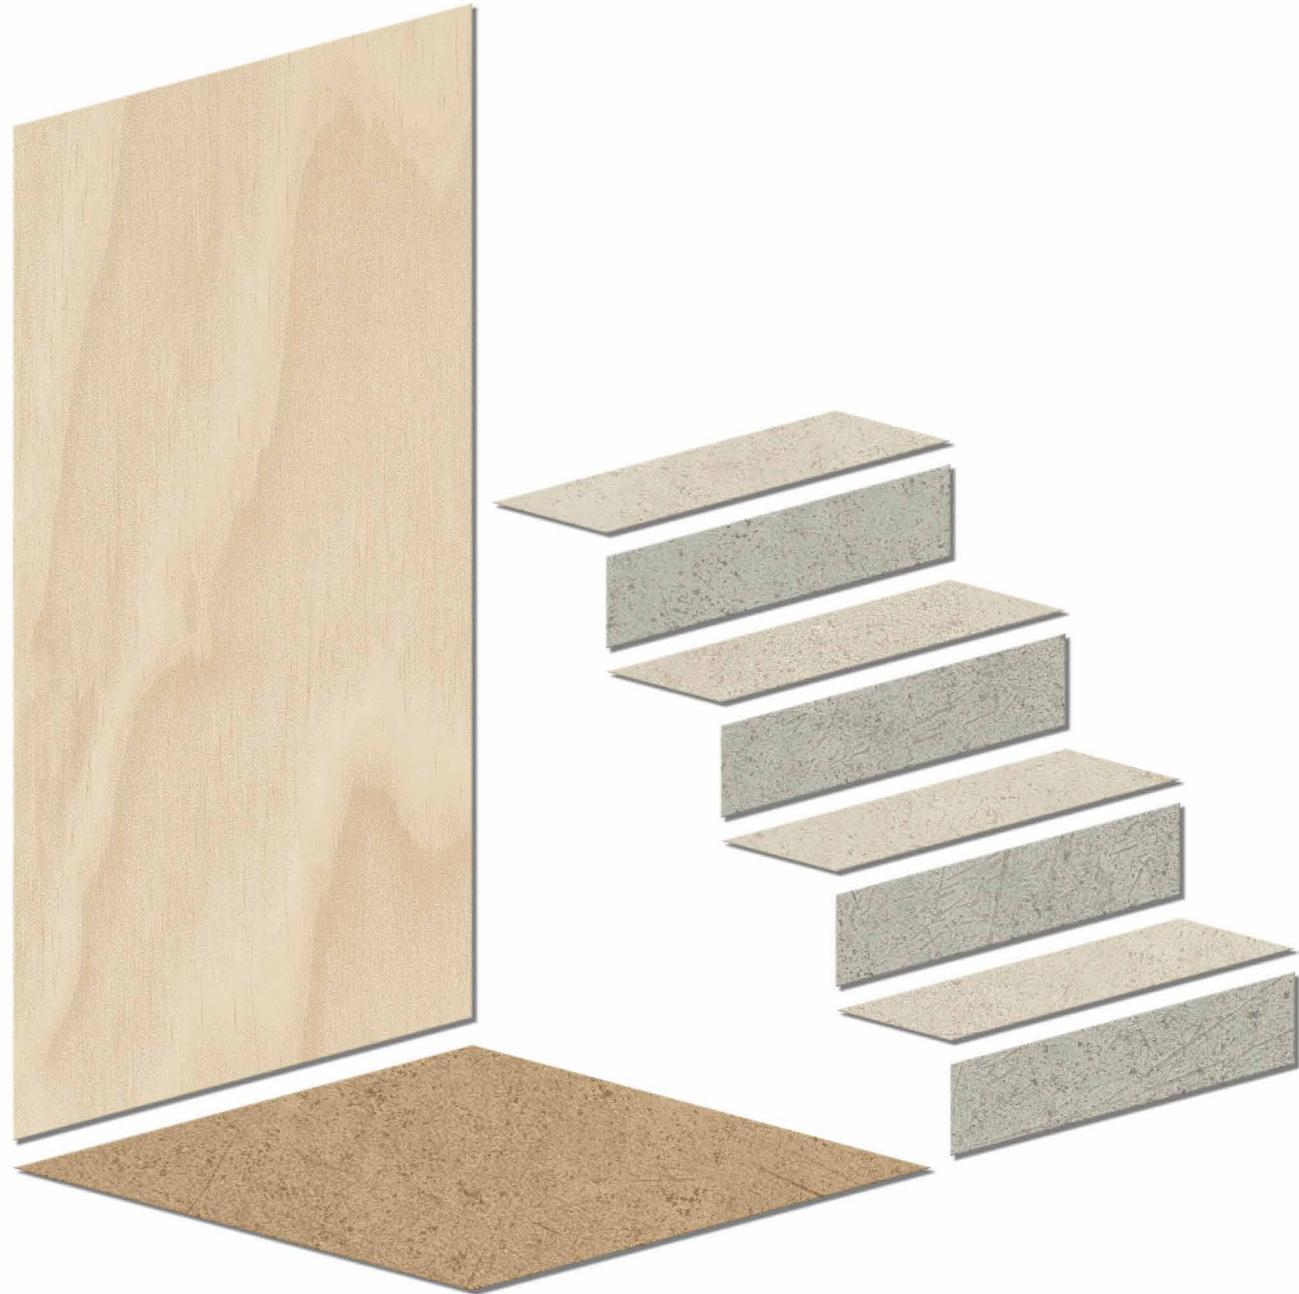

More easy cleaning with Tektanium

TEKTANIUM™

PU coating uses an innovative polymer system, forming a stronger layer of protection that delivers excellent resistance to **scratches, abrasions, wear and stains**.



Ease of cleaning and maintenance

Rated Excellent in cleanability test:

Simply wipe with a damp microfibre cloth = no residues visible whatsoever (according to Riboflavintest , third party evaluation)

Needs less time for cleaning, less water and less chemical products = financial savings and consideration for the environment.

Highly resistant to bacteria

Tested according to ISO 846 does not encourage bacterial growth

Improved resistance to stains


No absorption of most common chemical agents and solvents used in healthcare facilities and elderly care homes (ISO 26987 test-rated as not affected by most substances)



Excellent resistance and durability

Improved resistance to micro-scratches:

withstands twice as much traffic and heavy duty solicitation



Matte finish

It also offers a matte finish and is consistently visible from all angles. This enhances the designs and patterns of the range, resulting in more realistic effects.



See more on our cleanability and performance tests





Creating inclusive spaces with Excellence collections

Thanks to the wide design possibilities of the range, **Excellence collections also cater to inclusive design needs** such as individuals with autism or dementia.

The selection of colours, decors and technical characteristics should be taken into consideration when designing spaces adapted to differences in sensory processing, executive functioning and emotional regulation. The following aspects are all important considerations in choosing the right solution:



Visual comfort

Use colours and contrasts across the ranges to create:

- Way finding, signage
- Emotionally adapted environments

Select adapted colours and patterns from the collections to create a dementia-friendly design and lessen the impacts of old age and dementia.



Discover our DSDC accredited dementia-friendly designs



Acoustic comfort

Make sure to adapt acoustics through a vast array of floors with acoustic performances:

- Minimise in-room ambient noise
- Reduce noise coming from adjacent rooms
- Floors from 17 to 19 dB, some of them rated Class B




Safe and healthy environment



Choose floors and walls that will promote wellbeing inside the building:

- Optimal indoor air quality
- R10 slip resistance across the whole range
- Rollability and walking comfort

How to choose your floor from our range?

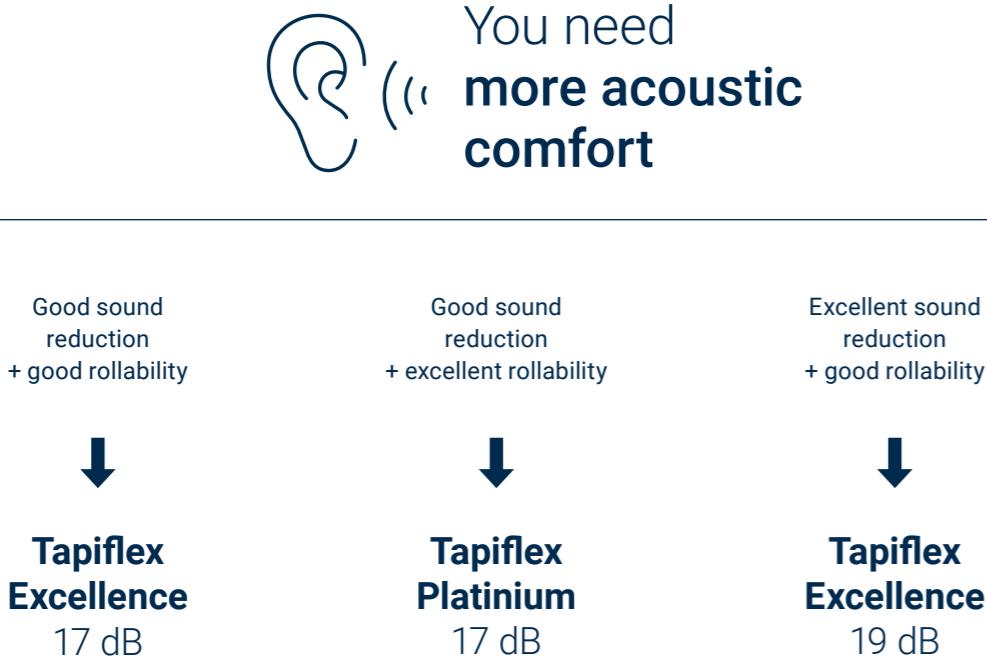

Excellence floors offer **the adapted solutions and options needed** for your projects.

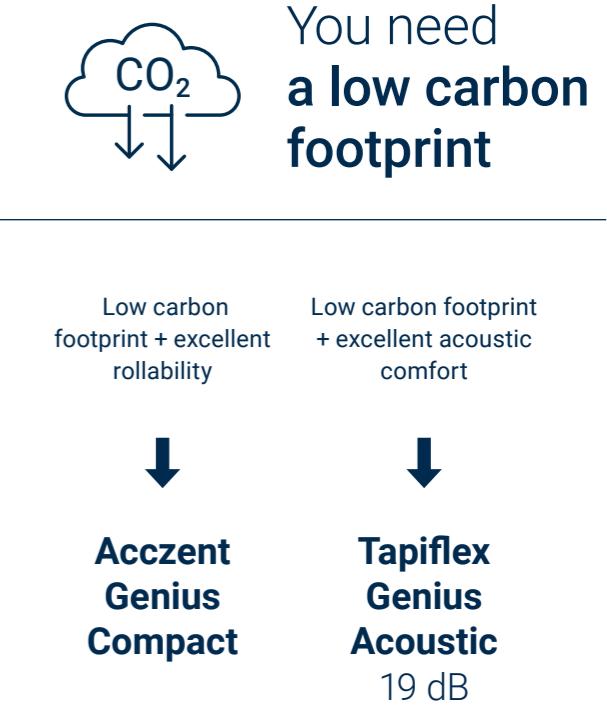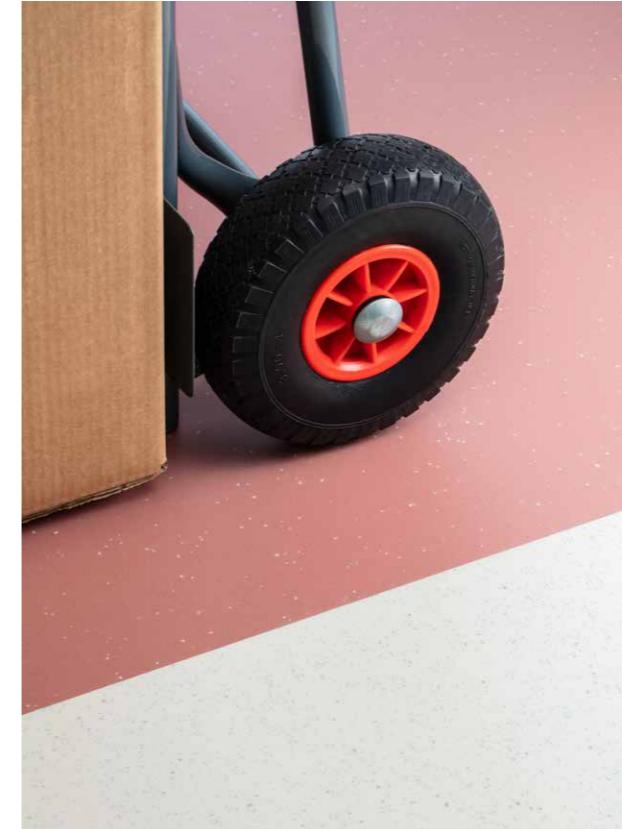

Expertise and sustainability Made in Europe

Many years of expertise for quality you can trust

Our Excellence collections are designed and manufactured at our production plants in Europe, ensuring the development of an advanced and sustainable range.



The range is manufactured in our factories that live up to strict European quality standards and embrace eco-conscious practices.



By choosing Tarkett heterogeneous solutions, you are opting for products proudly Made in Europe, thereby making a conscious decision to positively impact the environment by reducing transportation distances.



As our heterogeneous collections are produced in Europe, you not only support local European economies but also promote local European craftsmanship and social responsibility.



Because our Excellence collections are produced in Europe, we can ensure lower transportation costs to our European customers and positively impact our products' carbon footprint.



Sustainability at the heart

Recycling at our Clervaux recycling centre since 1995

We recycle in accordance with ISO 14021



Our pioneering take-back and recycling programme, ReStart, makes it possible to close the loop. This includes installation waste and post-use waste.

Recycling post-use material (Excellence Genius)



98% of materials assessed by a third party


No heavy metals, No biocides and No phthalates for more responsible PVC

Responsible production with 0% production waste to landfill

Up to 100% green electricity

100% recirculated industrial water in a closed-loop system

Excellence's circular journey

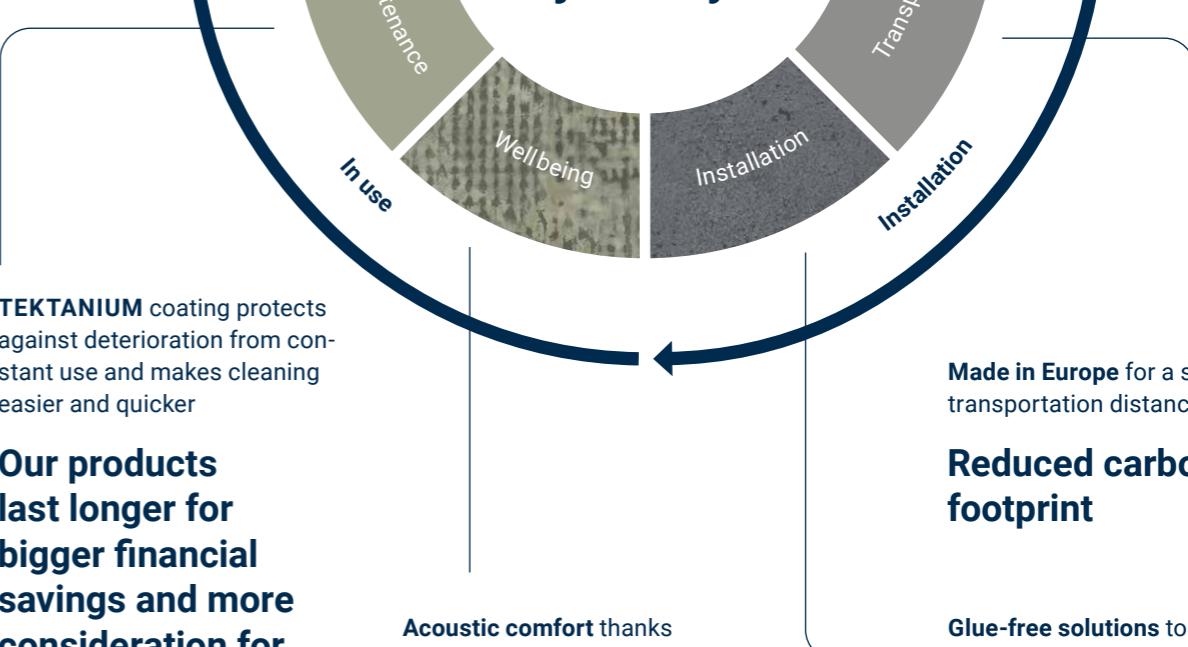

TEKTANIUM coating protects against deterioration from constant use and makes cleaning easier and quicker

Our products last longer for bigger financial savings and more consideration for the environment

Acoustic comfort thanks to our acoustic solutions

Optimal indoor air quality
Ultra-low VOC emissions, less than 10 µg/m³

Visual comfort solutions such as **dementia-friendly designs**

Made in Europe for a shorter transportation distances for


Reduced carbon footprint

Glue-free solutions to facilitate floor disassembling and recycling

Tarkett Academy to learn the best installation methods

Reduce your impact with Excellence Genius

With Excellence Genius we are the first flooring manufacturer to master closed-loop, post-use recycling for vinyl floorings.

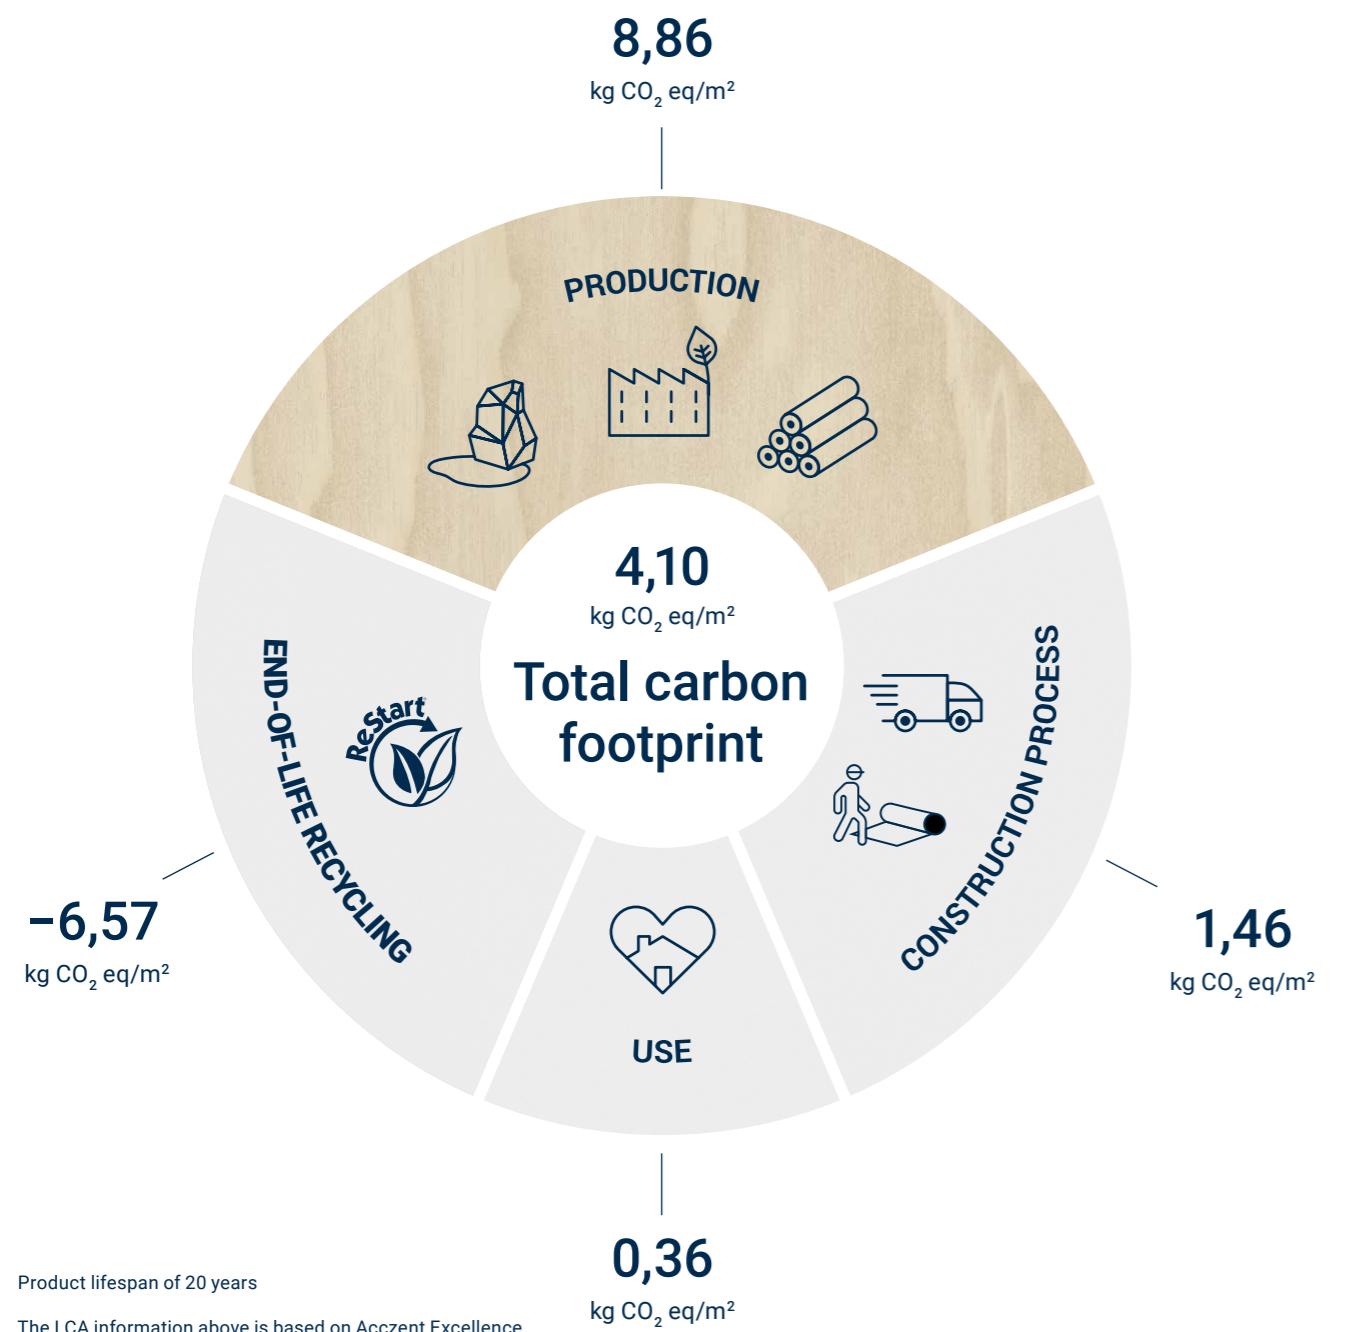



Recycling with ReStart®

Recycling allows you to reduce your carbon emissions impact, preserve **natural resources and reach higher standards of sustainability.**



Collecting waste

Our floors are recycled in accordance with ISO 14021: we offer a functional system to collect installation and post-use waste (ReStart®), and transport it to our recycling facility Clervaux in Luxembourg.



Recycled materials

Both post-use* and post-installation waste are recycled and turned into new products. This is how our Excellence range contains up to 29% **recycled** material.



Recycling waste

We have been recycling heterogeneous vinyl **since 1995**. We transform it into high-quality raw materials to use in new heterogeneous floors.



Hassle-free programme

Our dedicated **ReStart® take-back and recycling programme has been offering post-installation and post-use recycling since 2003**. This is a hassle-free system that guarantees collection and recycling into new raw materials or products.


Contact your local Tarkett sales offices to find out how to register for ReStart®. Reduce your carbon footprint and become part of the loop to incorporate more recycled content.

Excellence




Excellence floors are the responsible solution if you need a high-traffic-resistant floor with creative possibilities and adapted performances. It offers a choice of installation methods (glue-down or loose-lay) and is available with acoustic performance for sound reduction or a compact profile for improved rollability and resistance to indentation. The range offers a renewed palette of classic and on-trend designs, with an array of materials, patterns and colours for more creativity. The natural designs are extremely authentic and realistic, giving you a solution that is as beautiful as original wood or minerals.

Excellence Glue-down profiles

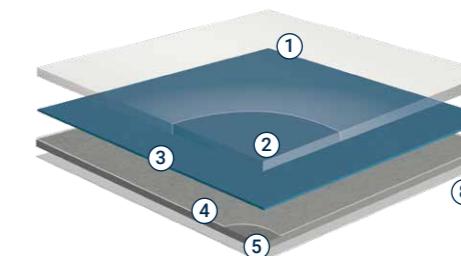


Tapiflex Acoustic
Impact sound reduction 19 dB

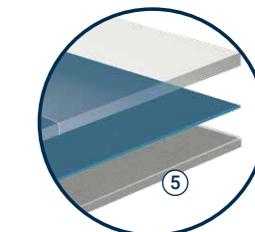


Accent Compact+
Excellent rollability,
Good sound reduction (8 dB)
and Class B for in-room impact
noise reduction

Excellence Genius Loose-lay profiles

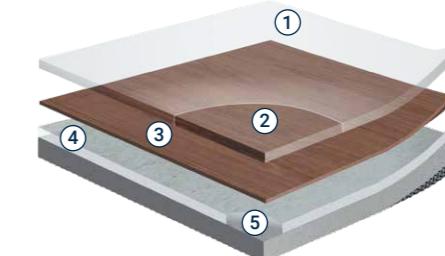

Tapiflex Acoustic
Impact sound reduction 19 dB

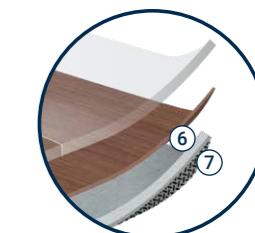

Accent Compact
Very high-intensity traffic
and damp subfloors

① Tektanium PU coating uses an innovative polymer system – forming a stronger layer of protection that delivers excellent resistance to scratches, abrasions, wear and stains.

② Pure PVC transparent wear layer for the best resistance to traffic and wear

③ High-quality printed designs for a vast selection of colours and patterns

④ Improved high-density glass fibre non-woven reinforcement for excellent dimensional stability and resistance to furniture

⑤ Reinforced solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing. The Compact+ version offers a certified 8 dB sound reduction and Class B in-room impact sound reduction.

⑥ Specific to Genius profile: integrated damp protection layer, preventing moisture from rising through the flooring from the subfloor

⑦ Specific to Genius profile: anti-skid ventilated backing ensures air circulation and ventilation underneath the floor covering, as well as better grip and product stability over time

⑧ The Tapiflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

Glue-down




Tapiflex Excellence
19 db

Tapiflex Excellence
17 db



Acczent Excellence Compact+
8 dB Impact sound reduction
/ Class B reduction of in-room impact noise

Creative Colour Chart



3 Inspirations
Wood – Minerals – Colours



93 designs
Matte finish



Hyperrealism of wood textures and materials



5 XXL formats
2 x 6 m. No repeat



Approved
Dementia-friendly designs

Responsible Flooring



Produced in Europe



27% Recycled content



Recycling* through **Restart®**



$\leq 10 \mu\text{g}/\text{m}^3$ Optimal indoor air quality



No phthalates
No biocides
No heavy metals

Improved Performance

TEKTANIUM™

Innovative coating for easier cleanability and cost-effective maintenance



Extreme durability and scratch resistance



Improved resistance to stains (ISO 26987 test-rated as not affected by most substances)



Excellent cleanability : no residues visible whatsoever (Riboflavin test)

* off-cuts and post-installation recycling





Genius loose-lay



**Tapiflex
Excellence
Genius 19 db**



**Accent
Excellence Genius
Compact**

Timeless
classic designs



3 inspirations:
Wood – Minerals –
Textures



25 classic
designs



Hyperrealism
of wood textures
and materials



Matches with
Platinum collection,
wetroom and stairs



dsdc
Dementia Design
Accredited Product

Closing the loop for
reduced carbon impact



Produced
in Europe



Recyclable post-
use (+off-cuts and
post-installation)



Recycled
content



Glue-free
installation method



voc
 $\leq 10 \mu\text{g}/\text{m}^3$
Optimal indoor
air quality



No phthalates
No biocides
No heavy metals

Quicker installation,
extra performance
TEKTANIUM®



**Saves you installation
time (vs. glue-down):**
up to 56% on initial
installation and up to 92%
with renovation



**Can accept foot traffic
immediately after
installation**
No waiting time



**Compatible with
multiple subfloors**
(standard cement, standard
wood, asbestos*, damp
subfloors**, existing
compact vinyl and linoleum)



**Compatible with
damp subfloors**
(compact version) Up to 7% CCM
/ 92% HR




**Resistant to high traffic
and rolling loads**
Resists to 115 kg Furniture Leg
& 100,000 cycles Castor chair
Resists to 300kg medical beds
and 600kg X-ray systems
Best in class dimensional
stability 0.04%

Platinum



The Platinum collection's inlaid construction makes this floor particularly well-suited to high traffic areas like healthcare and education buildings, where constant activity creates extremely demanding environments. It is highly resistant and comes with a compact or acoustic profile. The inlaid design incorporates multiple colours to suggest a sense of depth and robustness that carries timeless quality and durability.

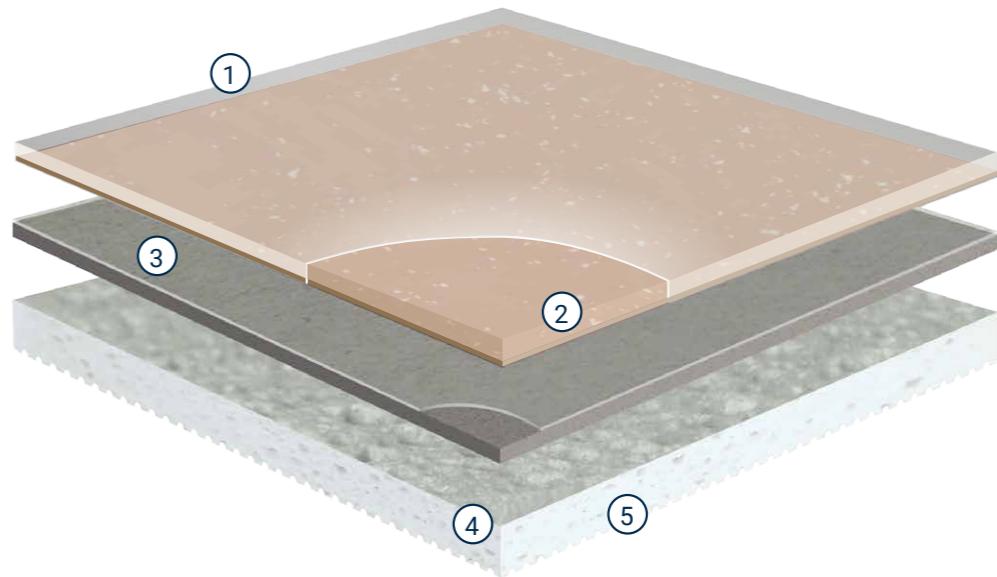

① Tektanium PU coating uses an innovative polymer system – forming a stronger layer of protection that delivers excellent resistance to scratches, abrasions, wear and stains

② Opaque wear layer incorporates inlaid designs for higher perceived resistance

③ High-density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture

④ Solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing

⑤ The Tapiflex version features a high density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

Glue-down



Tapiflex
Platinum
17 db



Acczent
Platinum
Compact

Robust Colour Chart



5 Patterns
Emerging from the inlaid construction



35 Designs
Matte finish



Matching
Floors and walls available in Tarkett's range



Seamless finish
Thanks to unique multicolour welding rods

Responsible Flooring



Made in FRANCE

Produced in Europe



25% Recycled content



Recycling* through **Restart®**



$\leq 10 \mu\text{g}/\text{m}^3$ Optimal indoor air quality



No phthalates
No biocides
No heavy metals

Improved Performance



Extreme resistance
Inlaid product construction
1 mm wear layer on all products

TEKTANIUM™

Innovative coating for easier cleanability and cost-effective maintenance



Extreme durability and scratch resistance



Improved resistance to stains
(ISO 26987 test-rated as not affected by most substances)



Excellent cleanability
no residues visible whatsoever (Riboflavin test)

* off-cuts and post-installation recycling




ProtectWall




In busy education and healthcare environments, as well as buzzing hospitality and office areas, ProtectWall offers high protection from rough treatment and the repeated need for renovation. ProtectWall stands up to scratches, impacts and staining agents, is easy to clean and preserves its appearance even after repeated cleaning. The range embodies a contemporary spirit, resonating deeply with the essence of nature.

Available in a captivating array of colours and patterns that encapsulate the fusion of modernity with timeless natural motifs.

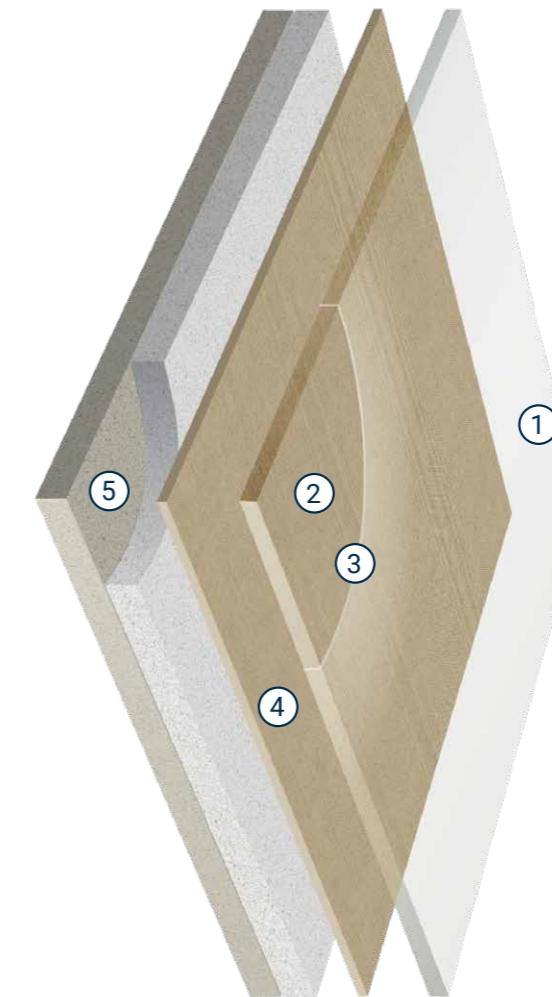

- ① Top Clean XP PUR Reinforced:
Excellent resistance to scuffing,
soiling and staining.
Easy maintenance.
- ② 4 different embossing options
available
 - For more elegant designs:
 - Tissé: warm touch and feeling
of textiles
 - Flat: for a perfect matte
contemporary finish
 - Paper: timeless dry and natural
effect, similar to paint and
wallpaper with a matte effect
 - Special for cleanrooms:
 - Aquarelle: certified for
cleanrooms
- ③ Clear wear layer: 0.15 mm
Excellent resistance prevents
scratches and abrasion.
- ④ High-definition printing for more
realistic and varied designs.
Helio or digital printed.
- ⑤ Intermediate and backing layers
for improved resistance to impact.

ProtectWall



ProtectWall 1.5 B-s2

Heavy-duty wall covering for exceptional impact and scratch resistance



ProtectWall CleanRoom

Heavy-duty wall covering designed to ensure hygiene in cleanrooms

Captivating Colour Chart



3 Inspirations
Wood – Minerals – Colours



Produced in Europe



26 designs
Matte finish



Recycled content



Approved
Dementia-friendly designs



Recycling* through Restart®



Matching
floors and walls available in Tarkett's range



Optimal indoor air quality



Accessories
Available for a perfect finish

Responsible wall covering

Highly resistant



Exceptional impact and scratch resistance
EN259-2 – Excellent with no visible bursts or cracking



Excellent cleanability no residues visible whatsoever
(Riboflavin test)



Highly resistant to bacteria
ISO 846 – Does not encourage bacterial growth




Hygiene in focus
Reduces germ infiltration by limiting the number of joints needed



Cleanroom-suitable material
ISO 14644-1: Highest cleanroom standard in healthcare environments**


*off-cuts and post-installation recycling. – ** ProtectWall CR only – Tarkett level/certified by the Fraunhofer Institute

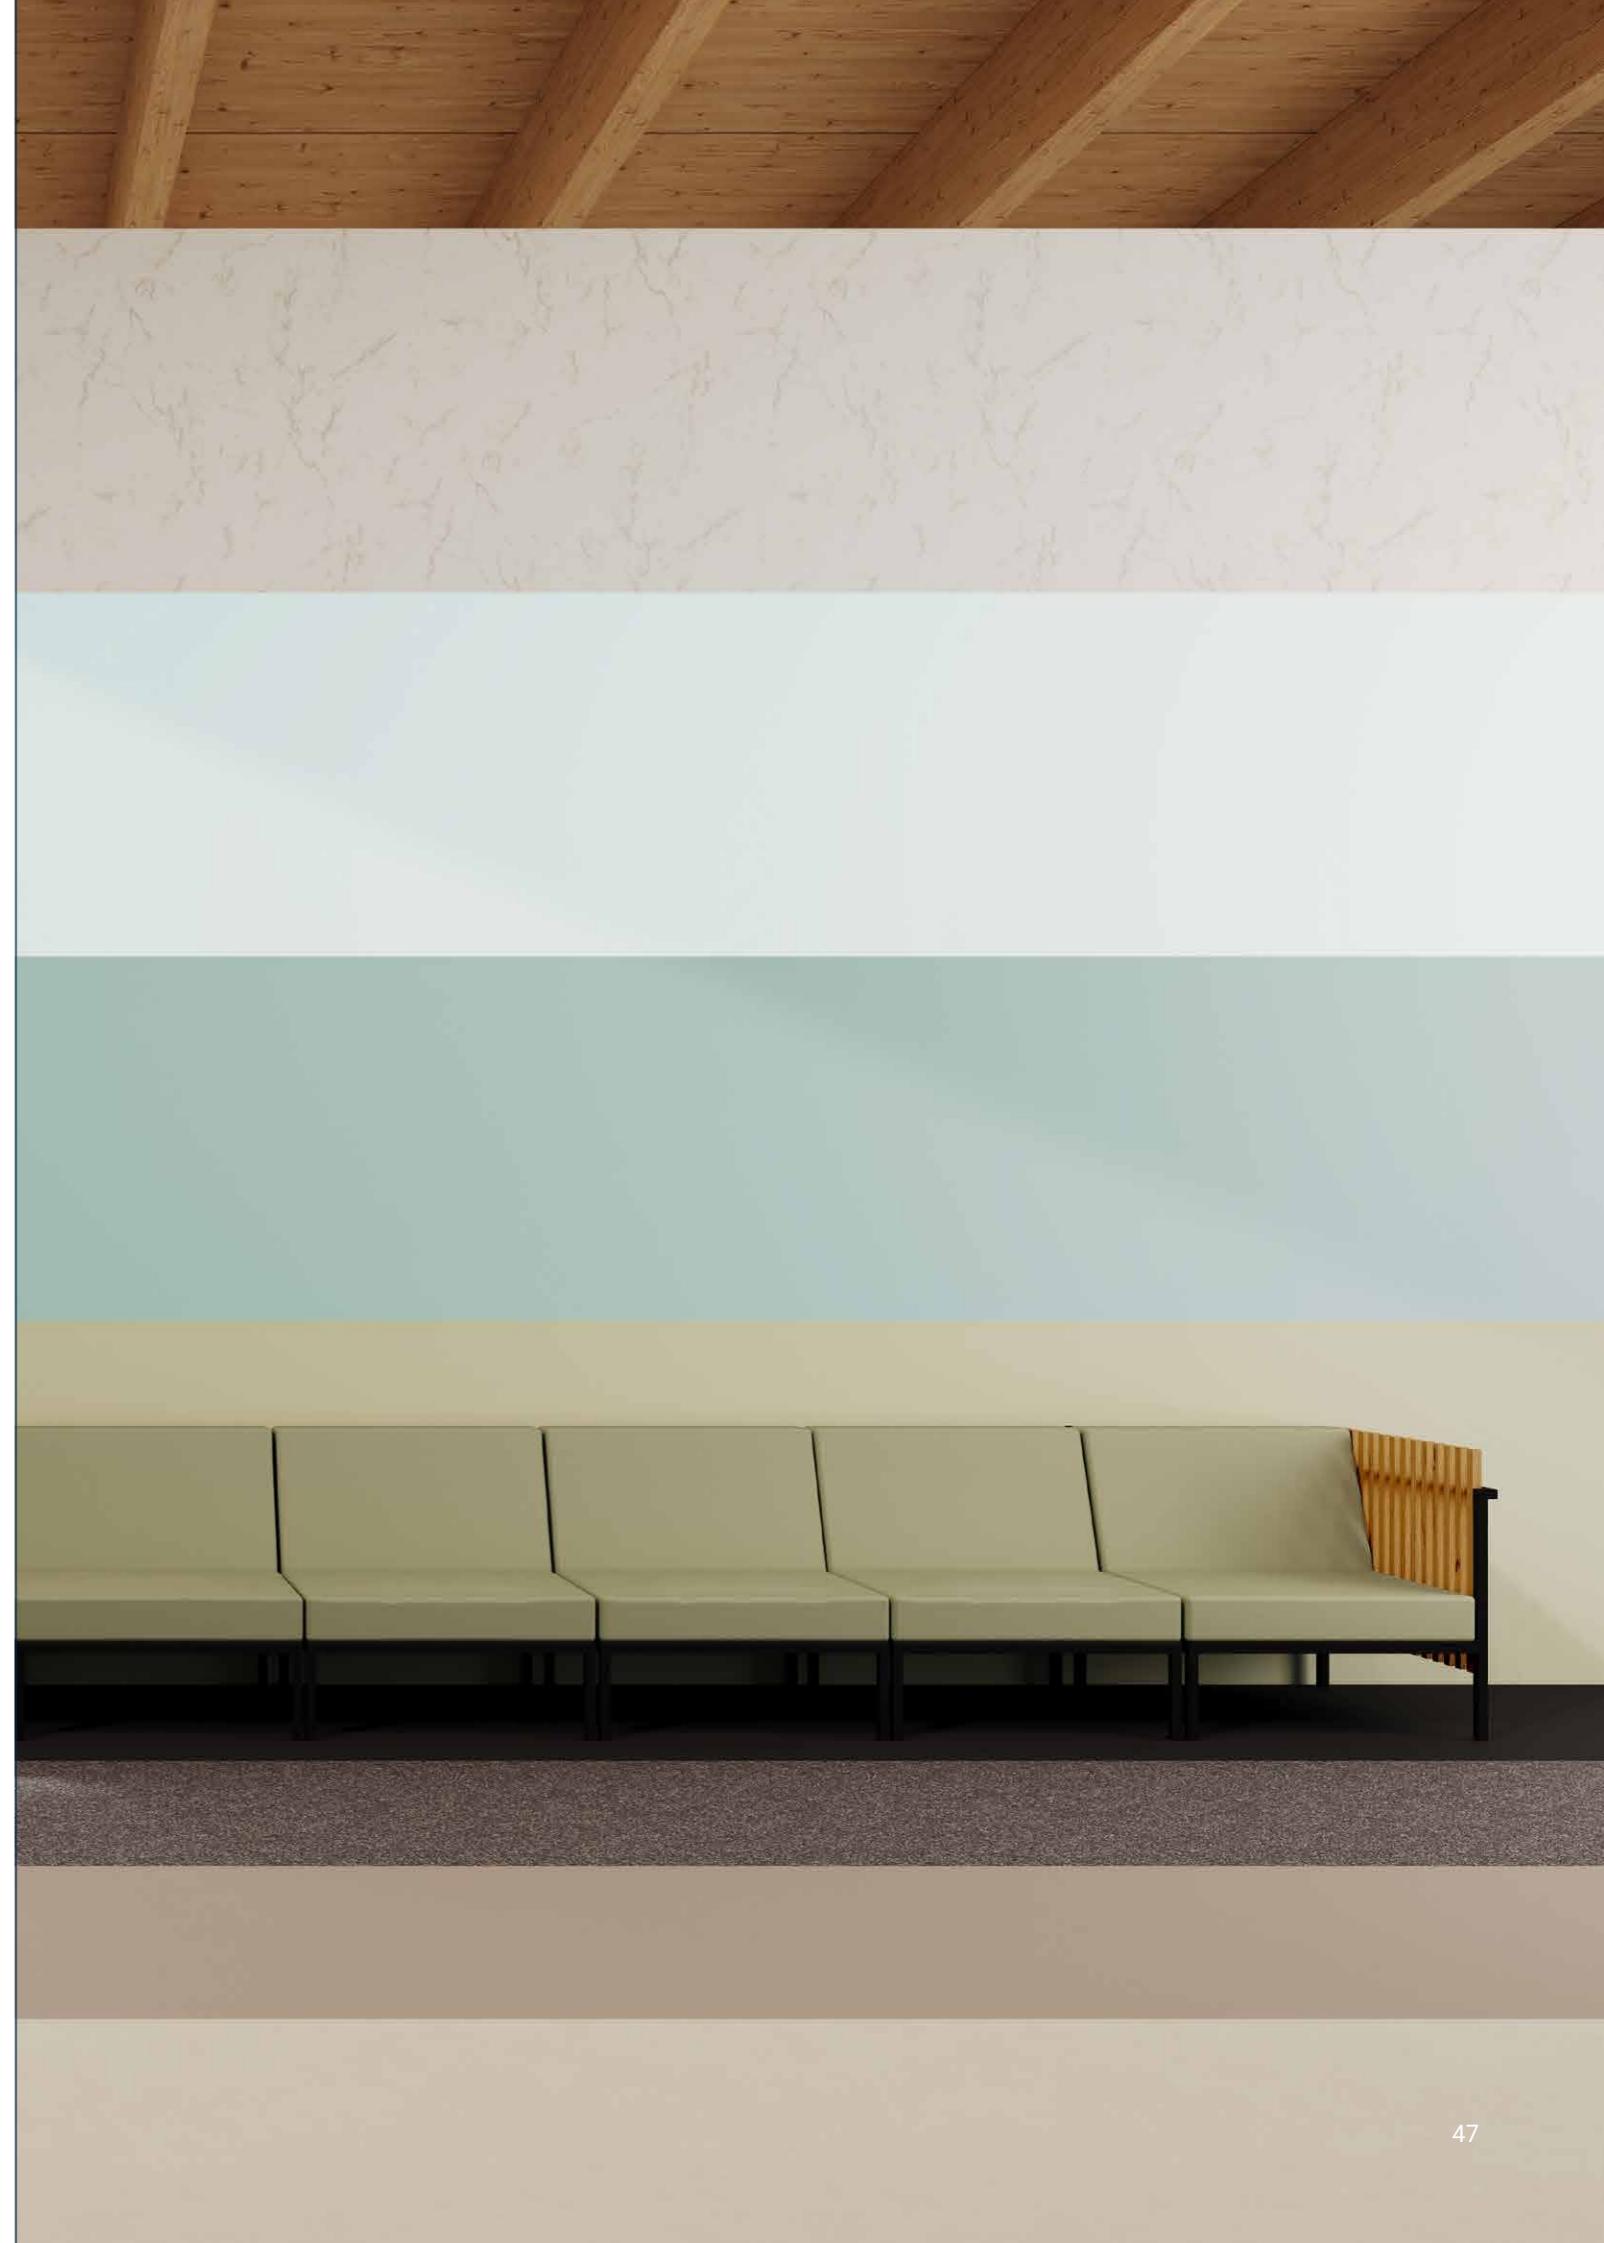

Tapiflex Stairs




By installing Tapiflex Stairs, building occupants are ensured of their safety when taking the stairs. Visible contrast, non-slip ridges, comfort when climbing and highly resistant wear greet feet step after step. The collection features 15 inspired designs mirroring the beauty of wood, minerals or solid colours. Each one creates a cohesive environment across all areas of your building, perfectly complementing our floors and walls collections. Choose from a variety of accessibility options and accessories to promote autonomy and simplify navigation within the building.

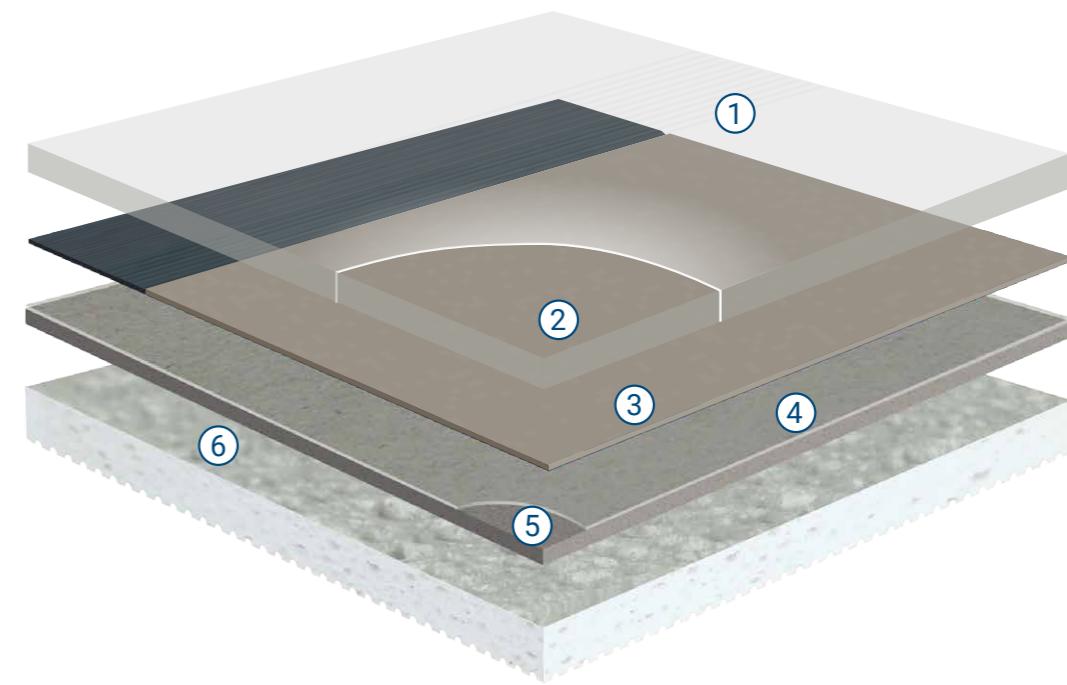

- ① PUR treatment is a photo-reticulated coating that is highly resistant to abrasion and scratches
- ② Pure PVC transparent wear layer of 0.85 mm for the best resistance to traffic and wear

- ③ High-quality printed designs for a vast selection of colours and patterns
- ④ High-density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture
- ⑤ Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing
- ⑥ Density closed-cell foam backing for sound reduction and underfoot comfort

Tapiflex Stairs

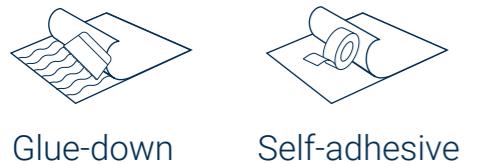


2 installation methods




18 db acoustic profile

Noise absorption backing
for optimal sound reduction

Smart Designs	Responsible flooring	Excellent performance
 15 designs Matte finish	 Produced in Europe	 The only self-adhesive stair coverings that: Reduce installation time by 30% Allow you to keep staircases open during step-by-step installation and renovation Are available to use immediately after installation Safe-dry glue
 3 Inspirations Wood – Minerals – Chromy	 Recycled content	 Recycling* through Restart®
 Hyperrealism of wood textures and materials	 Optimal indoor air quality $\leq 10 \mu\text{g}/\text{m}^3$	 Contrast stair nosing is included that complies with safety regulations
 Matching wetroom and stairs ranges available, along with the Excellence and Platinum collections	 No phthalates	 Accessories available for a complete installation
	 No biocides No heavy metals	

* off-cuts and post-installation recycling

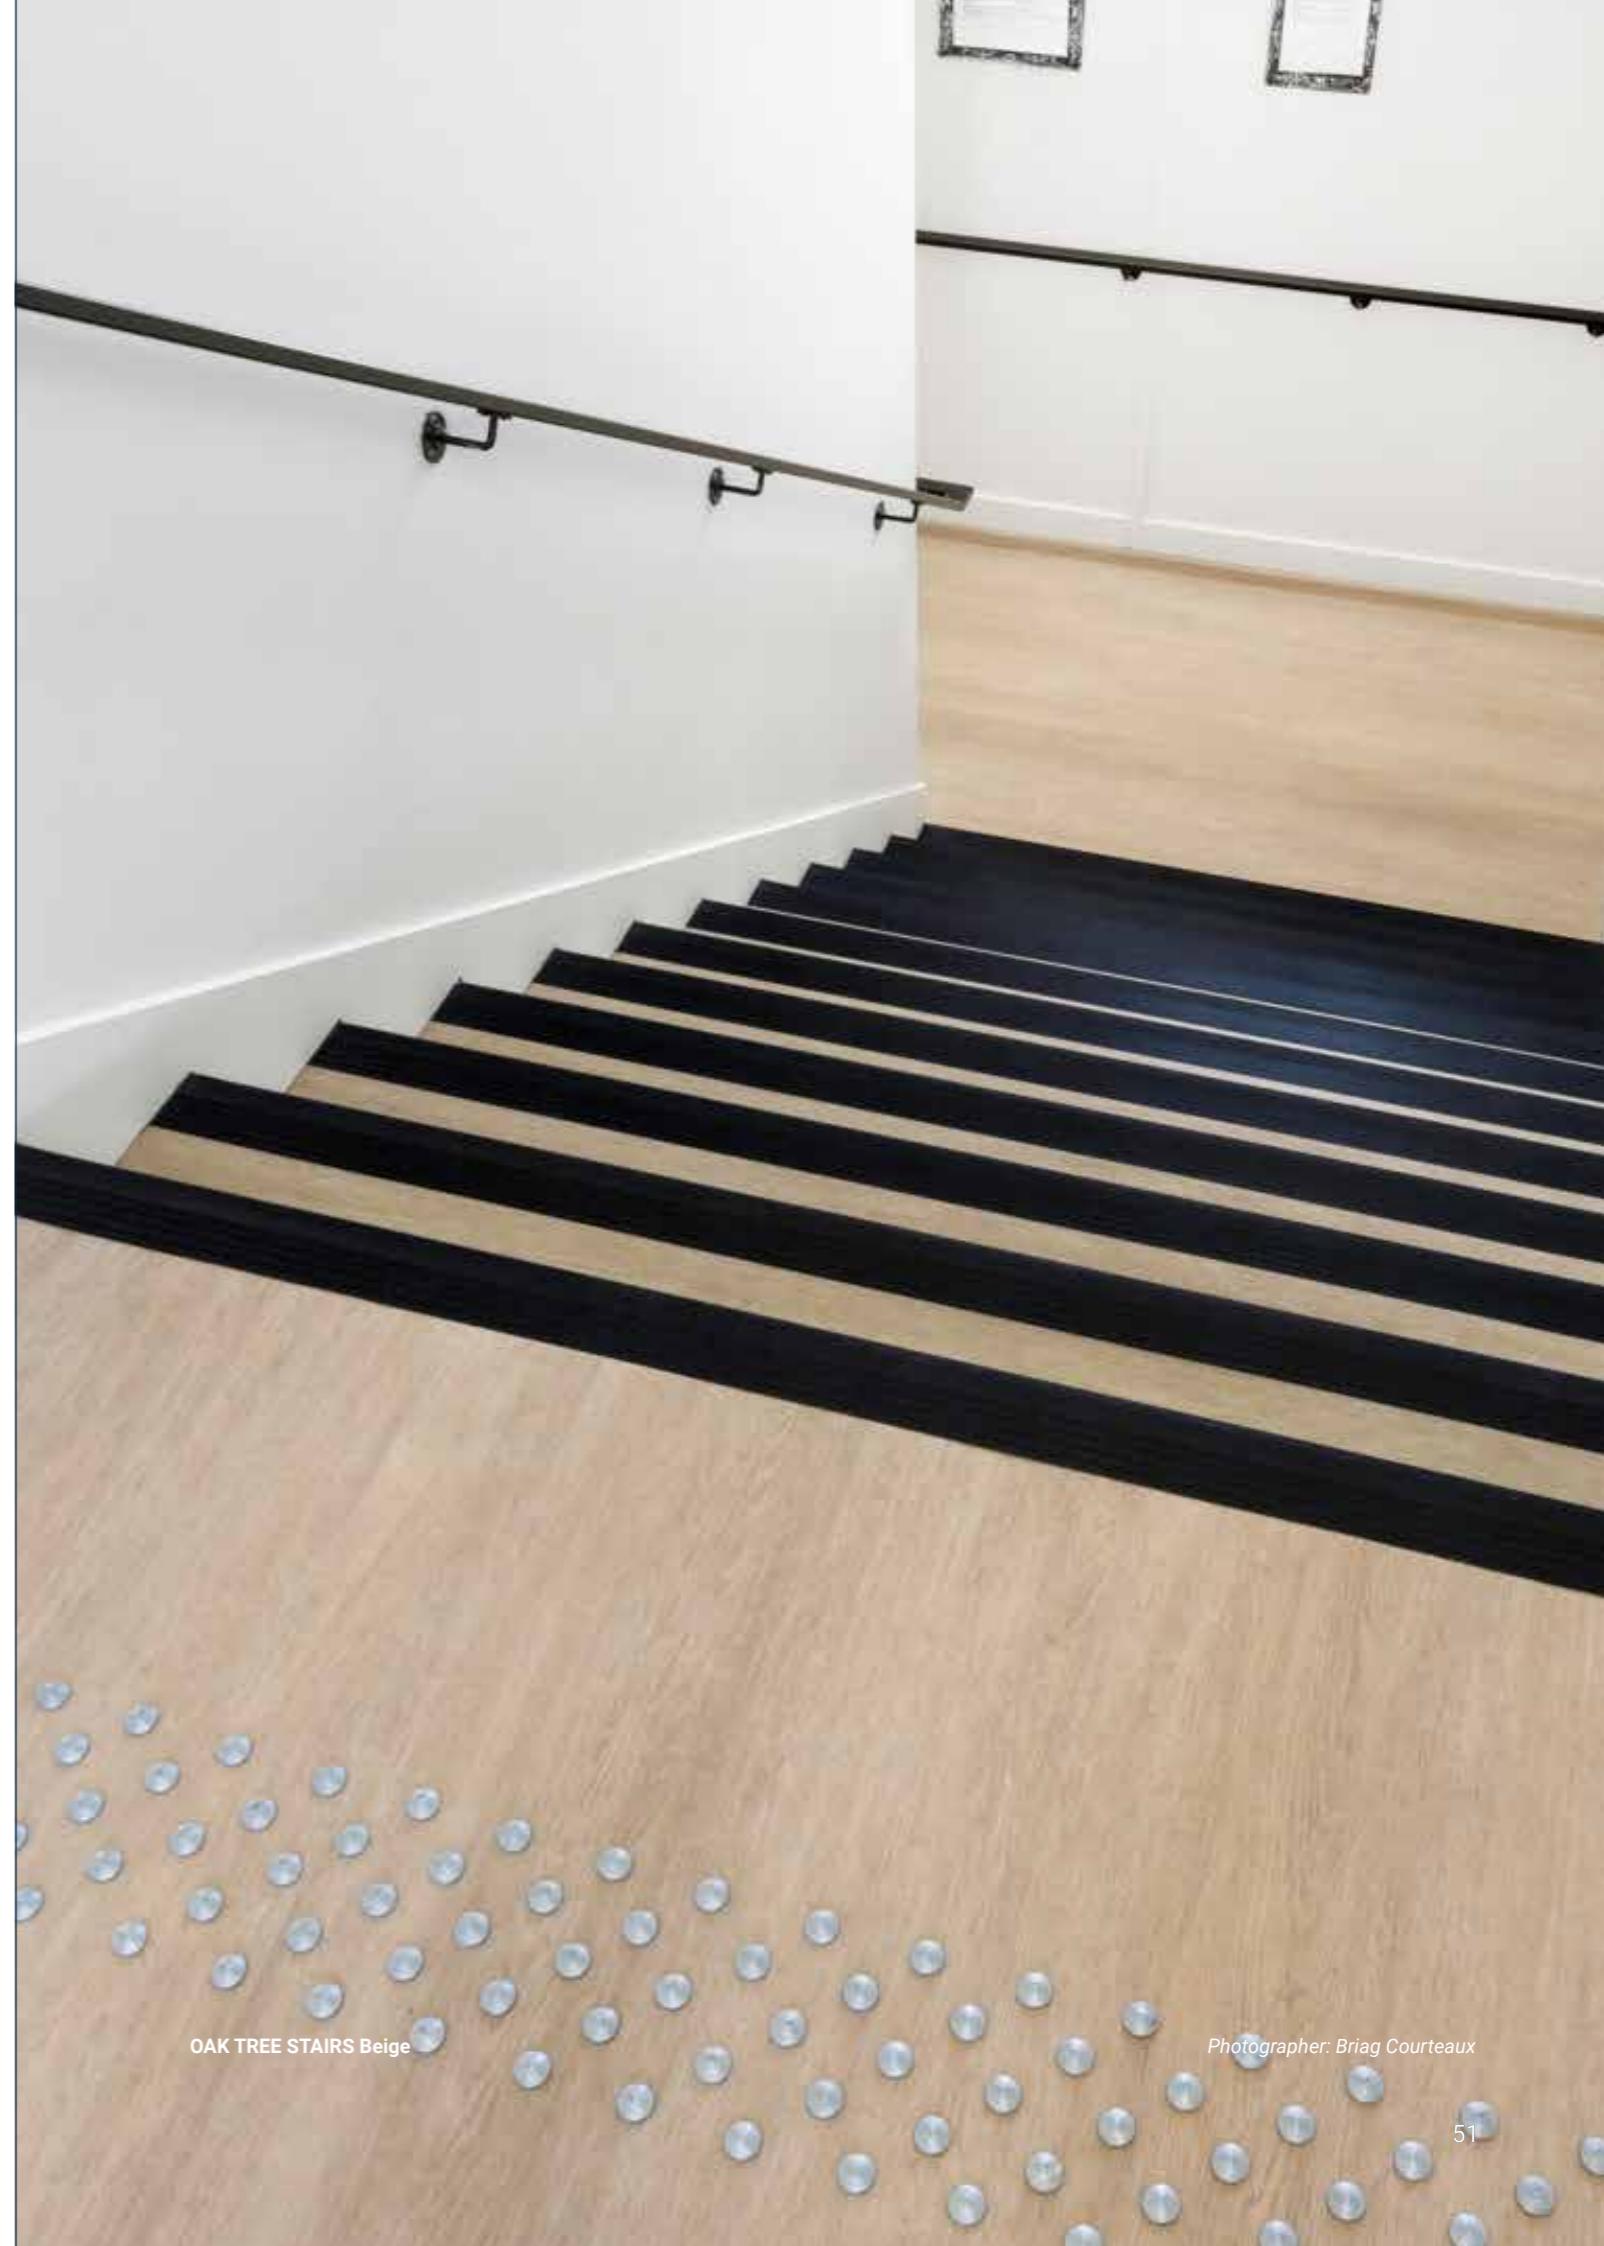


OAK TREE STAIRS Beige

Photographer: Brigitte Courteaux

Accessories – Skirtings

SEMI-RIGID SKIRTING – KS

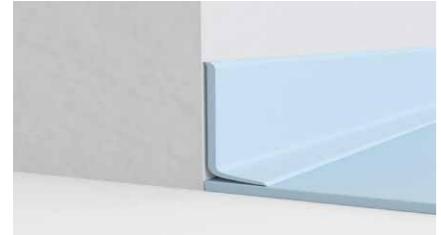

PVC semi-rigid skirting for decorative use with upper and lower soft lips.

Size (mm) KS61:
60 height × 15 depth × 2500 length
1 box of 20 pieces
Size (mm) KS100:
100 height × 15 depth × 2500 length
1 box of 20 pieces

Skirting KS 61
Oak long strip natural – 1411052
Concrete cool grey – 1411053

Aluminium – 1411051
White – 206009004
Black – 206009005
Dark grey – 206009006
Medium grey – 206009007
Grey – 206009008
Light grey – 206009009
Very light grey – 206009010
Light beige – 206009011
Beige – 206009012
Dark beige – 206009013
Dark brown – 206009014
Rosewood – 1411032
Greige – 206009017
Intense petrol – 1411056
Deep yellow – 206009031
Copper tapped metal – 206009032
Chalk – 206009033
Aqua – 206009034
Deep red Uni – 206009035
Yellow – 206009036
Blue – 206009037
Intense khaki Uni – 206009038
Bricks – 206009039

Skirting KS 100
White – 206010035
Concrete cool grey – 1411168
Dark grey – 206010032
Medium grey – 206010033
Grey – 206010034
Dark beige – 1411167

DECORATIVE SET-ON SKIRTINGS




Compact PVC skirting with decorative film and PUR surface treatment to perfectly match selected designs.

Size (mm):
60 height × 10 depth × 1950 length
1 box of 5 pieces (9.75 m)

27 colours available – see colours and references in the table on page 74 to 76

RIGID DECORATIVE SET-ON SKIRTINGS – IS60

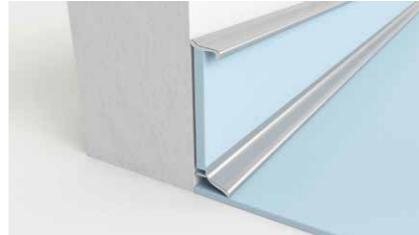


Rigid decorative set-on skirtings are made with an MDF support to facilitate easy insertion of the floor covering and for a perfect colour match.

Size (mm):
60 height × 2570 length
1 box of 20 pieces (2.5 m)

Medium grey – 1448000
Light grey – 1448001
White – 1448002

FLEXIBLE SKIRTINGS – PL

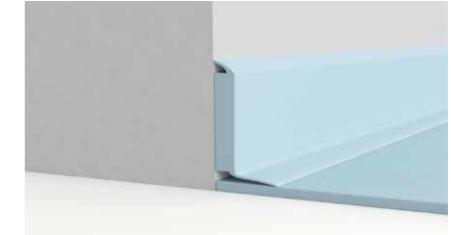

Very flexible PVC skirtings that are used where clean finishing is required in non-critical areas.

Size (mm) PL6:
5000 length × 12 width × 60 height
Size (mm) PL8:
5000 length × 14 width × 80 height
Size (mm) PL10:
5000 length × 15 width × 100 height
1 unit of 50 m per box

PL 6 PL 8 PL 10

Black	1449001	1458001	1450001
Medium grey	1449002	1458002	1450002
Silver grey	1449003	1458003	1450003
Light grey	1449004	1458004	1450004
White	1449005	1458005	1450005

RENOVATION SKIRTING



White high-density polystyrene foam 100% recyclable with a protective varnish.

Size (mm):
110 height × 22 depth × 2000 length
1 box of 18 pieces (36 m)

White – 1411301

NON-PVC SKIRTINGS




Finished skirtings in extruded polystyrene (HDPS) for indoor use.

Size (mm):
60 mm: 60 × 13 × 2400
80 mm: 80 × 15 × 2400
100 mm: 100 × 13 × 2400
1 box of 6 pieces

White 60 mm – 1411900
White 80 mm – 1411902
White 100 mm – 1411901

Accessories – Covings


PVC COVE FORMER

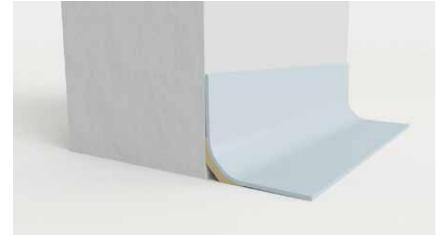


Used to form a cove where floor coverings are continued up the wall.

Size (mm) PA15: 15 x 15
1 box of 25 (50 m)
Size (mm) PA20/PA20SA: 20 x 20
Size (mm) PA25: 25 x 25
Size (mm) PA30: 30 x 30
Size (mm) PA40: 38 x 38
1 box of 30 pieces (60 m)


Dark grey

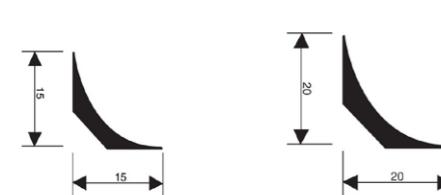


PA 15 – 26617001




PA20 – 1441000
PA20 SA – 1441001
(Self-adhesive)




CAP 1
Medium grey – 1443000
Light grey – 1443001
White – 1443002



CAP 2
White – 1444001
Black – 1444000
Silver – 1444002

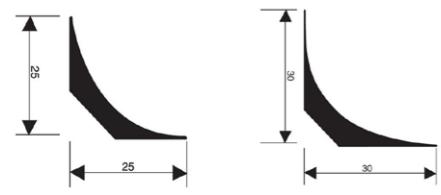


PA25 – 26629001



PA30 – 1442000



CAP 3
White – 1445001
Black – 1445000
Wood – 1445002



PA40 – 26618001


PVC CAPPING



Used to finish the top of a resilient floor covering where it has been coved up the wall. Normally used with a cove former.


Size (mm) CAP 1: 28.5 x 2700
Size (mm) CAP 2: 18 x 2700
Size (mm) CAP 3: 27 x 2700
1 box of 25 pieces (2.7 m)

2 IN 1: COVER FORMER & CAPPING

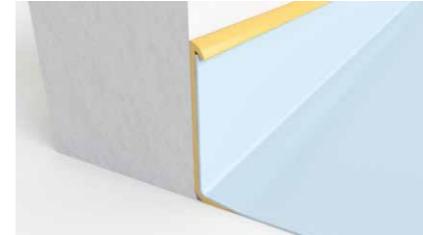

Provides a neat cove that allows floor coverings to be dressed up the wall to form a skirting. This supports the floor covering at a weak point and protects the exposed edge.

Size (mm) PAD 8:
80 height x 20 depth x 2000 length
Size (mm) PAD 10:
100 height x 20 depth x 2000 length
1 box of 20 pieces (2 m)

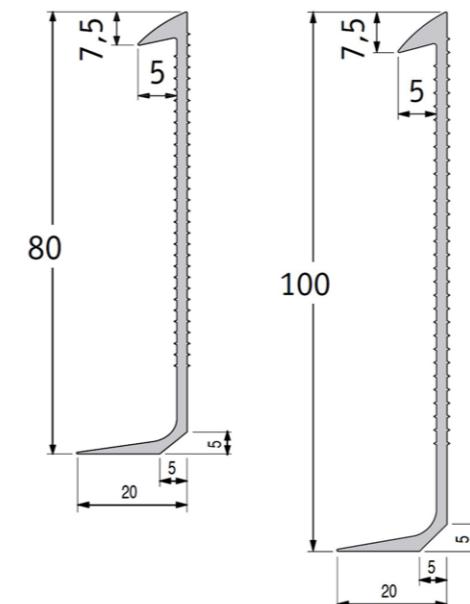

PAD 8
Light grey – 1438001
White – 1438002




PAD 10
Light grey – 1437001
White – 1437002

Accessories – Stairs

PVC STAIR NOSE – NM



Flexible PVC stairnose. Cut to size on site and fixed with adhesive adding to the floor covering.

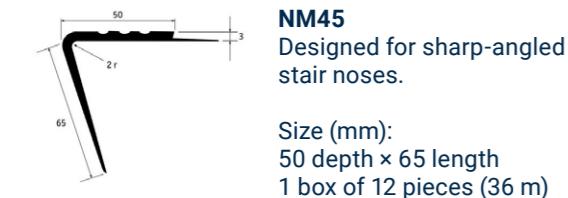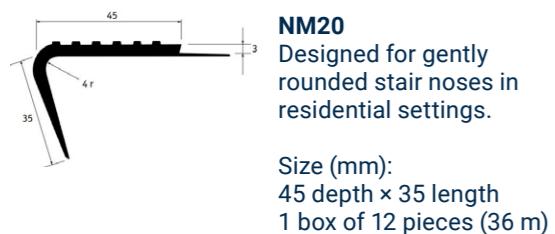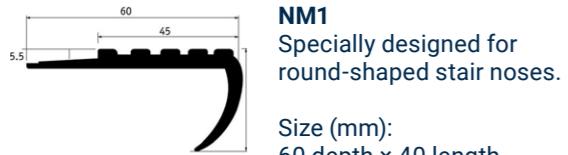


	NM1	NM20	NM45
Black	1401004	1404004	1403004
Medium grey	1401005	1404005	1403005
Light grey	1401006	1404006	1403006

INSIDE & OUTSIDE STAIR CORNER – SB




Corners designed to form a neat and attractive edge around the open end of a step by concealing the edge of the floor covering and stair edging.

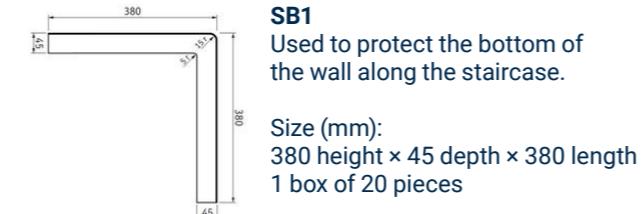

	SB1	SB2
Black	1432004	1433004
Medium grey	1432005	1433005
Light grey	1432006	1433006

ALUMINIUM STAIR NOSE – MS43

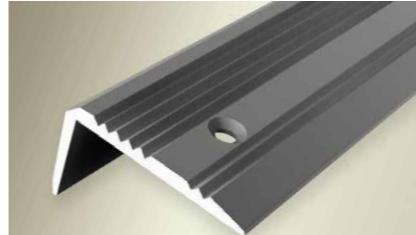


Aluminium stairnose. To be screwed over the floor covering.

Size (mm):
23 height x 40 mm depth x 2500 length
1 box of 5 pieces (2.5 m)

Aluminium – 1434101

ALUMINIUM STAIR NOSE – MSI53

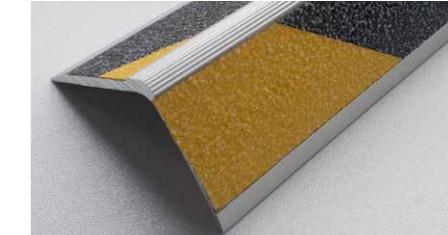

Stair nosing, grooved, for two non-slip inserts.

Size (mm):
23 height x 53 depth x 2500 length
1 box of 5 pieces (2.5 m)

Aluminium base – 1434102

Coloured abrasive slip-resistant inserts
ISP Yellow & Black – 1434103
ISP Black – 1434104

ALUMINIUM STAIR NOSE – MSI60



Stair nosing, grooved, for replaceable PVC inserts.

Size (mm):
34 height x 60 depth x 2500 length
1 box of 5 pieces (2.5 m)

Aluminium base – 1434105

Coloured plastic slip-resistant inserts
IP Yellow – 1434107
IP Black – 1434106
IP Medium Grey – 1434108
IP Light Grey – 1434109

Accessories – Accessibility

SELF-ADHESIVE WARNING TILES



Helps the user to recognise a change in level in accordance with regulatory requirements for disabled access and safety.




Size (mm): 815 × 400
10 pcs. per box



Size (mm): 1350 × 400
4 pcs. per box

	Warning tiles M	Warning tiles L
Black	1440600	1440602
Grey	1440601	1440603

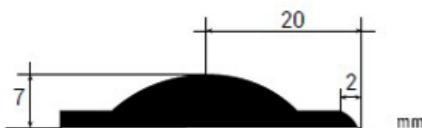

RAPID'PODO – SELF-ADHESIVE



Ready to use self-adhesive warning studs kits for heavy traffic.

Stud size (mm):
25 diameter × 5 thickness
5 plates of 33 studs = 165 studs in a box
(= 120 × 40 cm)

Black – 1440610
Light grey – 1440611
Aluminium – 1440612

TACTILE TILES – SELF-ADHESIVE



Designed for visually impaired people to help them find their way using a white cane.

Size (mm): 1000 × 215
15 pcs. per box

Black – 1440604
Grey – 1440605



SELF-ADHESIVE WARNING STRIP



The marking of risers allows users to better estimate the height of the staircase and reduces the risk of falling down stairs. It makes it possible to identify the first and last step of a staircase.

Size (mm):
100 width × 0.6 thickness
Comes in 10-metre rolls

Yellow – 1257004


TACTILE STRIPS – TO BE GLUED



30 mm-wide guide rail for gluing or adhesive with installation template.

Size: 30 mm thickness
Comes in 12-metre rolls

Black – 1440606
White – 1440607

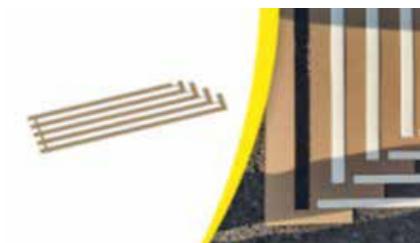


Cardboard templates

Size (mm):
620 height × 2 depth × 1160 length

Angle template for tactile strips – 1440608
Right template for tactile strips – 1440609

Accessories – Transition

TRANSITION PROFILES – EXPANSION JOINTS

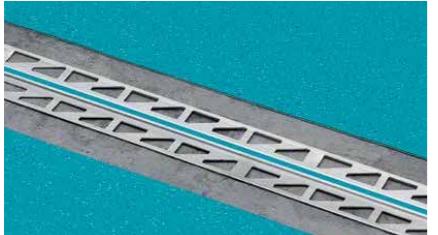

Screed and expansion joints are used in almost all types of buildings and must go down to floor height. If no joints are made, the floor covering may tear or dish, which would be complex and costly to repair.

Expansion Joints 2.2 – for compact flooring (2 mm)

Size (mm):
2 thickness × 2500 length
1 box of 10 pieces (25 m)

26600 ---*


Expansion Joints 3.7 – for acoustic floor (3/3.5 mm)

Size (mm):
3.7 thickness × 2500 height
1 box of 10 pieces (25 m)

26601 --- *

* Available on request in all colours.

TRANSITION PROFILES – PVC PROFILES – TTP

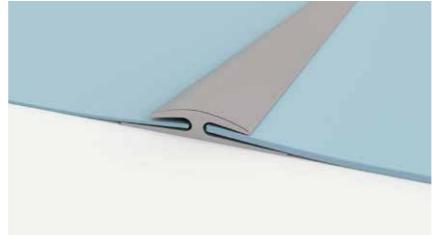

One-piece vinyl transition strip used to join different floorings of the same or slightly different heights. For gluing.

Size (mm):
30 width × 5 height × 2500 length
2 units of 25 m (50 m)

STOP TRANSITION – FT



Bendable aluminium profiles used to form a join between different types of floor coverings. Can be manually curved on-site to accommodate shaped and radius designs. For gluing.

FT 2.5 – for compact flooring

Size (mm):
18 width × 2.5 thickness × 2500 length
1 box of 10 pieces (2.5 m)

Silver – 1456100


FT 5 – for acoustic flooring

Size (mm):
18 width × 5 thickness × 2500 length
1 box of 10 pieces (2.5 m)

Silver – 1456101

Accessories – Installation

FOR GROOVING:

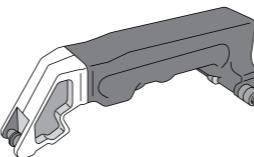

Fast grooving
Secure grooving: consistent groove depth regardless of pressure applied


Master turbo groover

ref. 1258100

Master turbo groover (2 pcs.)

ref. 1258101

FOR WELDING WALL COVERINGS:

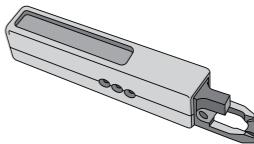

Easy, safe wall welding
No risk of burning the wall covering

Turbo detail nozzle

ref 1258102

FOR HORIZONTAL INSTALLATION OF WALL COVERING:



Fast, safe installation
Up to 20% less installation time
Less muscle fatigue for installers

Wall unroller

ref. 1562010

Accessories – Overlayers

TARKOPROTECT FLEECE 180 WHITE



Tarkoprotect fleece 180 is a self-adhesive protective fleece suitable for covering and protecting various types of floors and stairs.

Size (mm):
5000 length × 100 width × 0.13 depth
1 roll of 50 m

White – 24990002

TARKOPROTECT BOARDS 600 WHITE





Tarkoprotect boards 600 is a lightweight cover panel for the temporary covering, closing off and protection buildings during various construction stages.

Size (mm):
1200 length × 800 width × 3 depth
10 pcs. per box

White – 24990003

Full design range

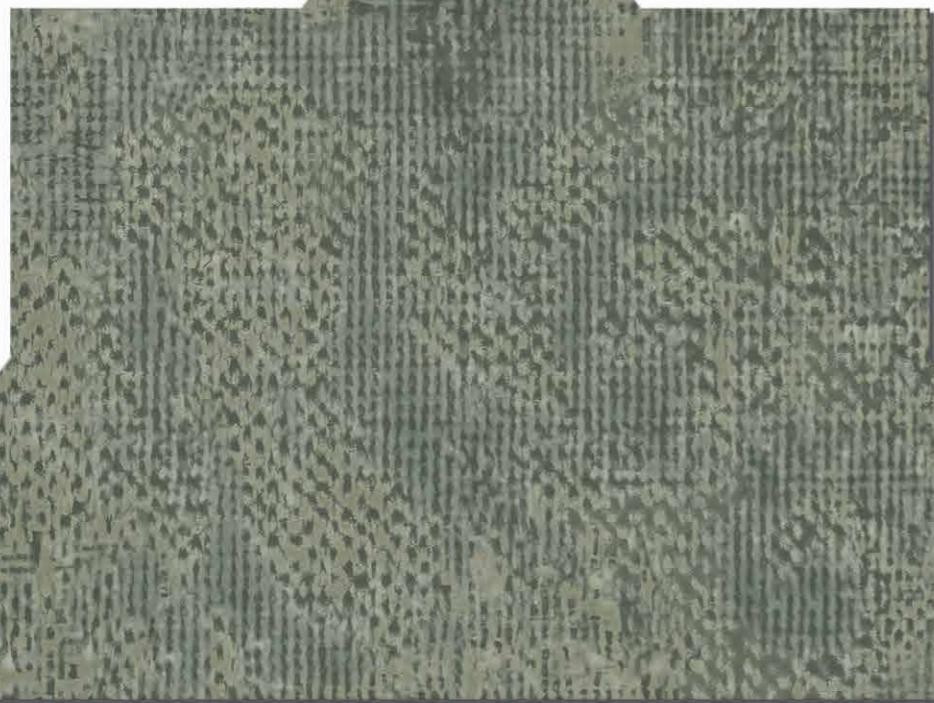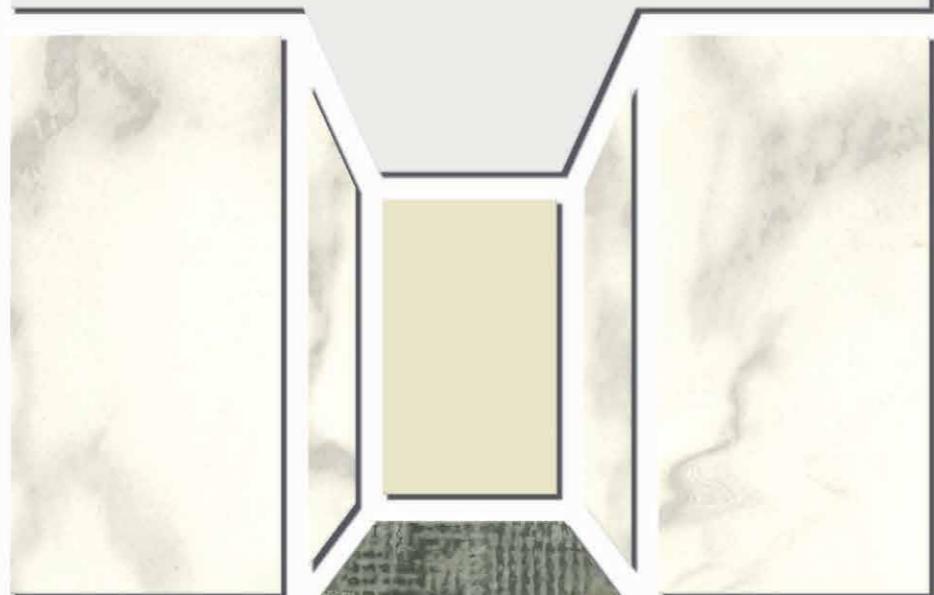

Excellence collection



XXL CARRARA GRANDE
natural – 2 × 6 m



XXL BRECCIASTONE
grey – 2 × 6 m



XXL BRECCIACINO
nude – 2 × 6 m



XXL OAK
natural – 2 × 6 m



XXL OAK
golden – 2 × 6 m

Excellence collection



UNI
deep yellow
LRV 38.5%
NCS S 2030-Y20R



UNI
deep red
LRV 16.6%
NCS S 3040-Y90R



UNI
white
LRV 66.3%
NCS S 1002-Y50R



UNI
intense kaki
LRV 24.7%
NCS S 5005-G50Y



UNI
intense brick
LRV 19.2%
NCS S 4020-Y80R



UNI
medium grey
LRV 38.0%
NCS S 3502-R50B



UNI
deep green
LRV 12.4%
NCS S 6010-B50G



UNI
dark beige
LRV 28.9%
NCS S 4005-Y20R



UNI
warm grey
LRV 19.0%
NCS S 5502-R50B



UNI
intense aqua
LRV 36.0%
NCS S 3005-B20G



UNI
dark grey
LRV 14.0%
NCS S 6005-R80B




UNI
deep blue
LRV 11.9%
NCS S 6010-R70B




UNI
black
LRV 4.9%
NCS S 8000-N


Excellence collection

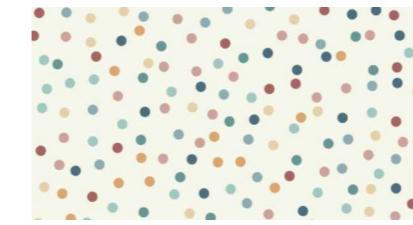


GOMMETTE
multico
LRV 62.2%
NCS S 1002-Y80R

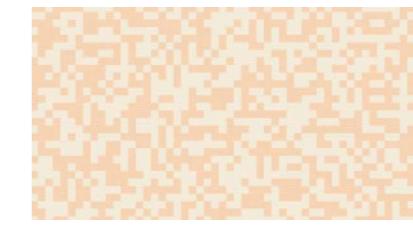


QR CODE
soft brick
LRV 57.09%
NCS S 2005-B

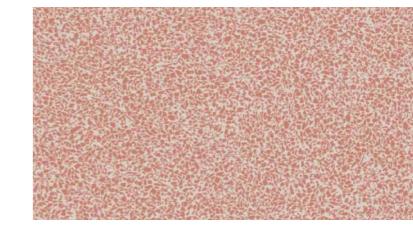


FRAGMENTO
deep brick
LRV 38.5%
NCS S 3020-Y80R

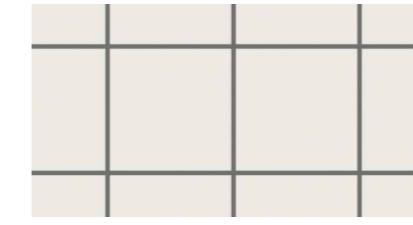


QUADRILLAGE
black & white
LRV 58.5%
NCS S 2002-R50B
NCS S 6502-R50B

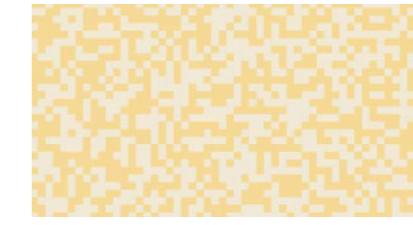


QR CODE
soft yellow
LRV 58.8%
NCS S 1515-Y20R

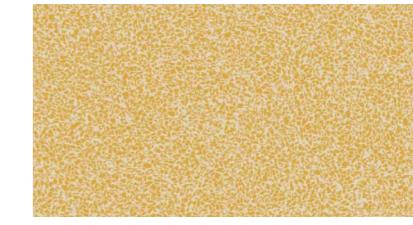


FRAGMENTO
deep yellow
LRV 46.6%
NCS S 2030-Y10R

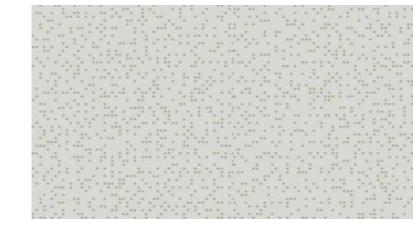


MATRIX²
light grey
LRV 45.5%
NCS S 2502-R

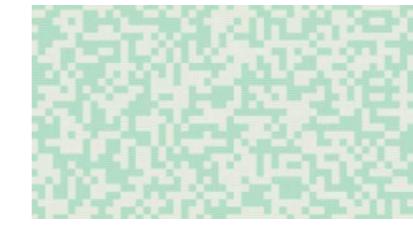


QR CODE
soft aqua
LRV 53.4%
NCS S 2000-N

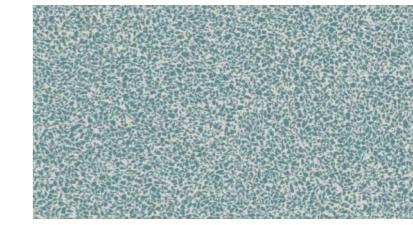


FRAGMENTO
deep green
LRV 42.9%
NCS S 4010-B30G

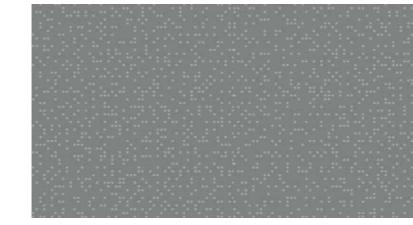

MATRIX²
dark grey
LRV 17.5%
NCS S 5502-B

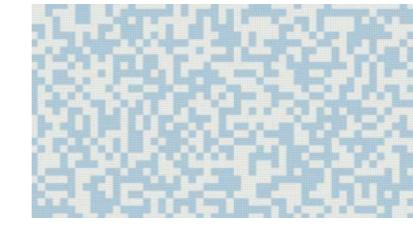


QR CODE
soft sky blue
LRV 52.0%
NCS S 1515-R80B

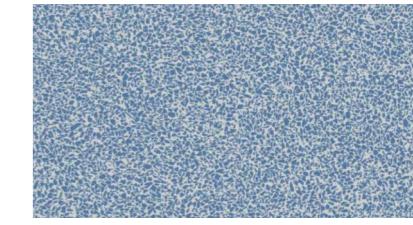


FRAGMENTO
deep turquoise
LRV 35.8%
NCS S 3010-R90B



ENCRYPTION
black & white
LRV 8.1%
NCS S 7500-N

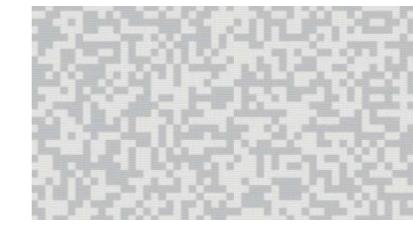

QR CODE
soft grey
LRV 54.0%
NCS S 2502-R50B

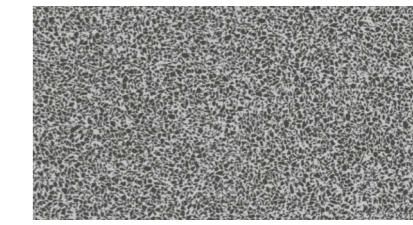


FRAGMENTO
deep black
LRV 23.9%
NCS S 6502-R50B


Excellence collection



CONCRETE
brick
LRV 24.7%
NCS S 4020-Y70R

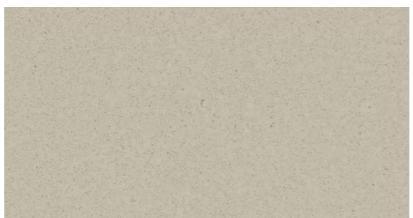

GRANITO
warm grey
LRV 36.0%
NCS S 3502-Y50R

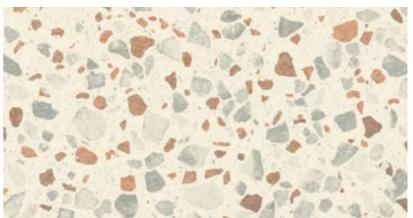


TERRAZZO GRANDE
brick
LRV 57.3%
NCS S 4010-Y70R
NCS S 1502-Y50R



CONCRETE
ochre
LRV 26.8%
NCS S 4020-Y10R



CONCRETE
warm grey
LRV 18.0%
NCS S 6005-Y20R

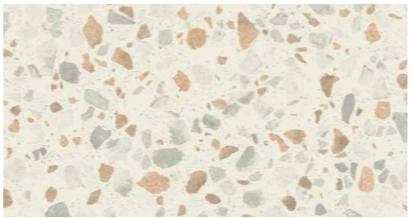


TERRAZZO GRANDE
ochre
LRV 58.0%
NCS S 4010-Y30R
NCS S 1502-Y50R



CONCRETE
grey beige
LRV 32.4%
NCS S 4005-Y20R



CONCRETE
chalk
LRV 45.3%
NCS S 2502-Y50R

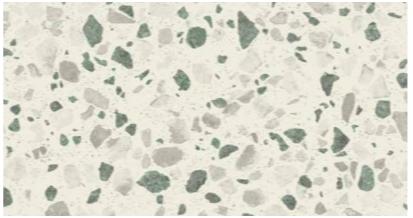


TERRAZZO GRANDE
green
LRV 59.5%
NCS S 4005-R80B
NCS S 1502-Y50R



CONCRETE
blue
LRV 26.7%
NCS S 4000-N




CONCRETE
cool grey
LRV 32.0%
NCS S 3502-Y80R

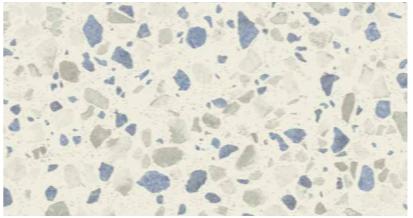


TERRAZZO GRANDE
blue
LRV 59.7%
NCS S 4005-G50Y
NCS S 1502-Y50R



CONCRETE
deep blue
LRV 10.8%
NCS S 7005-B

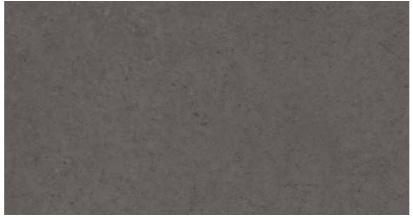


CONCRETE
dark grey
LRV 11.6%
NCS S 6502-Y80R

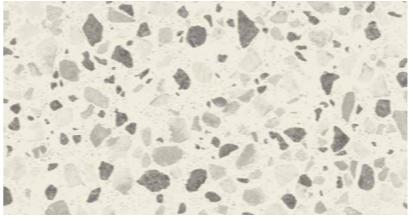

TERRAZZO GRANDE
grey
LRV 60.2%
NCS S 5502-Y80R
NCS S 1502-Y50R

Excellence collection

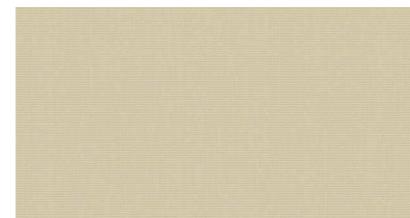


TISSAGE²
soft grege
LRV 37.4%
NCS S 3005-Y20R



CARPET
brick
LRV 25.7%
NCS S 5010-Y50R




TERRAZZO MURANO
terracotta
LRV 43.1%
NCS S 2502-Y50R

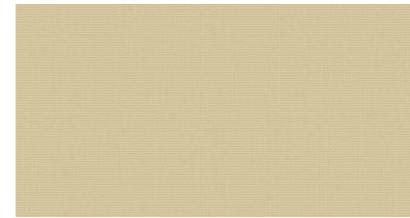


TISSAGE²
soft beige
LRV 43.0%
NCS S 3010-Y20R



CARPET
ochre
LRV 25.7%
NCS S 4010-Y10R

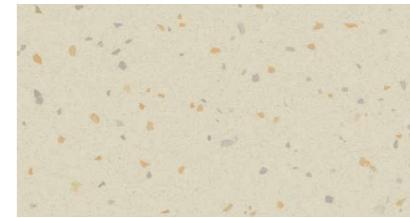


TERRAZZO MURANO
gold & silver
LRV 43.2%
NCS S 2502-Y50R

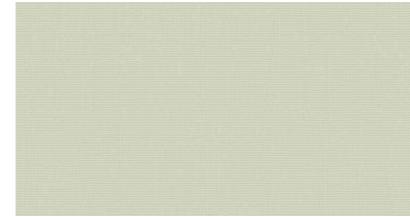


TISSAGE²
soft kaki
LRV 42.1%
NCS S 2502-Y



CARPET
moss
LRV 18.6%
NCS S 6005-G50Y

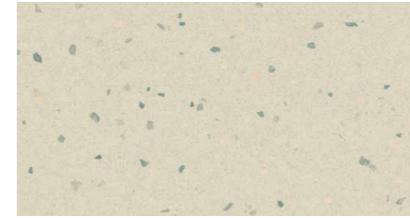


TERRAZZO MURANO
petrol
LRV 43.1%
NCS S 2502-Y50R

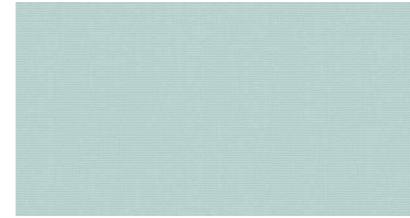


TISSAGE²
soft aqua
LRV 43.0%
NCS S 3005-B




CARPET
intense jean
LRV 17.8%
NCS S 5005-R80B

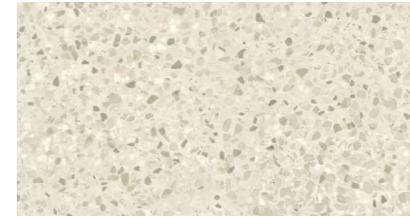


TERRAZZO
natural grey
LRV 45.5%
NCS S 2502-Y50R

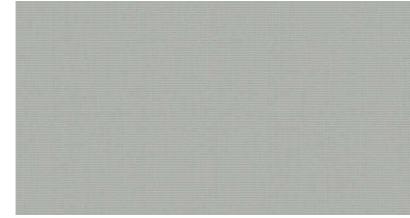

TISSAGE²
soft grey
LRV 30.7%
NCS S 4000-N

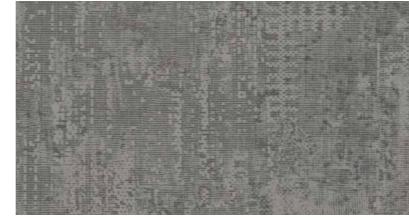


CARPET
dark grey
LRV 19.9%
NCS S 5502-Y80R

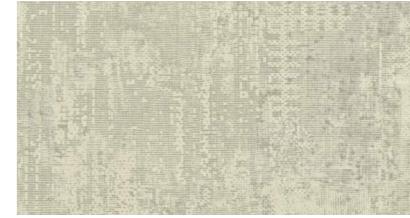


CARPET
white grey
LRV 41.3%
NCS S 2502-Y


Excellence collection

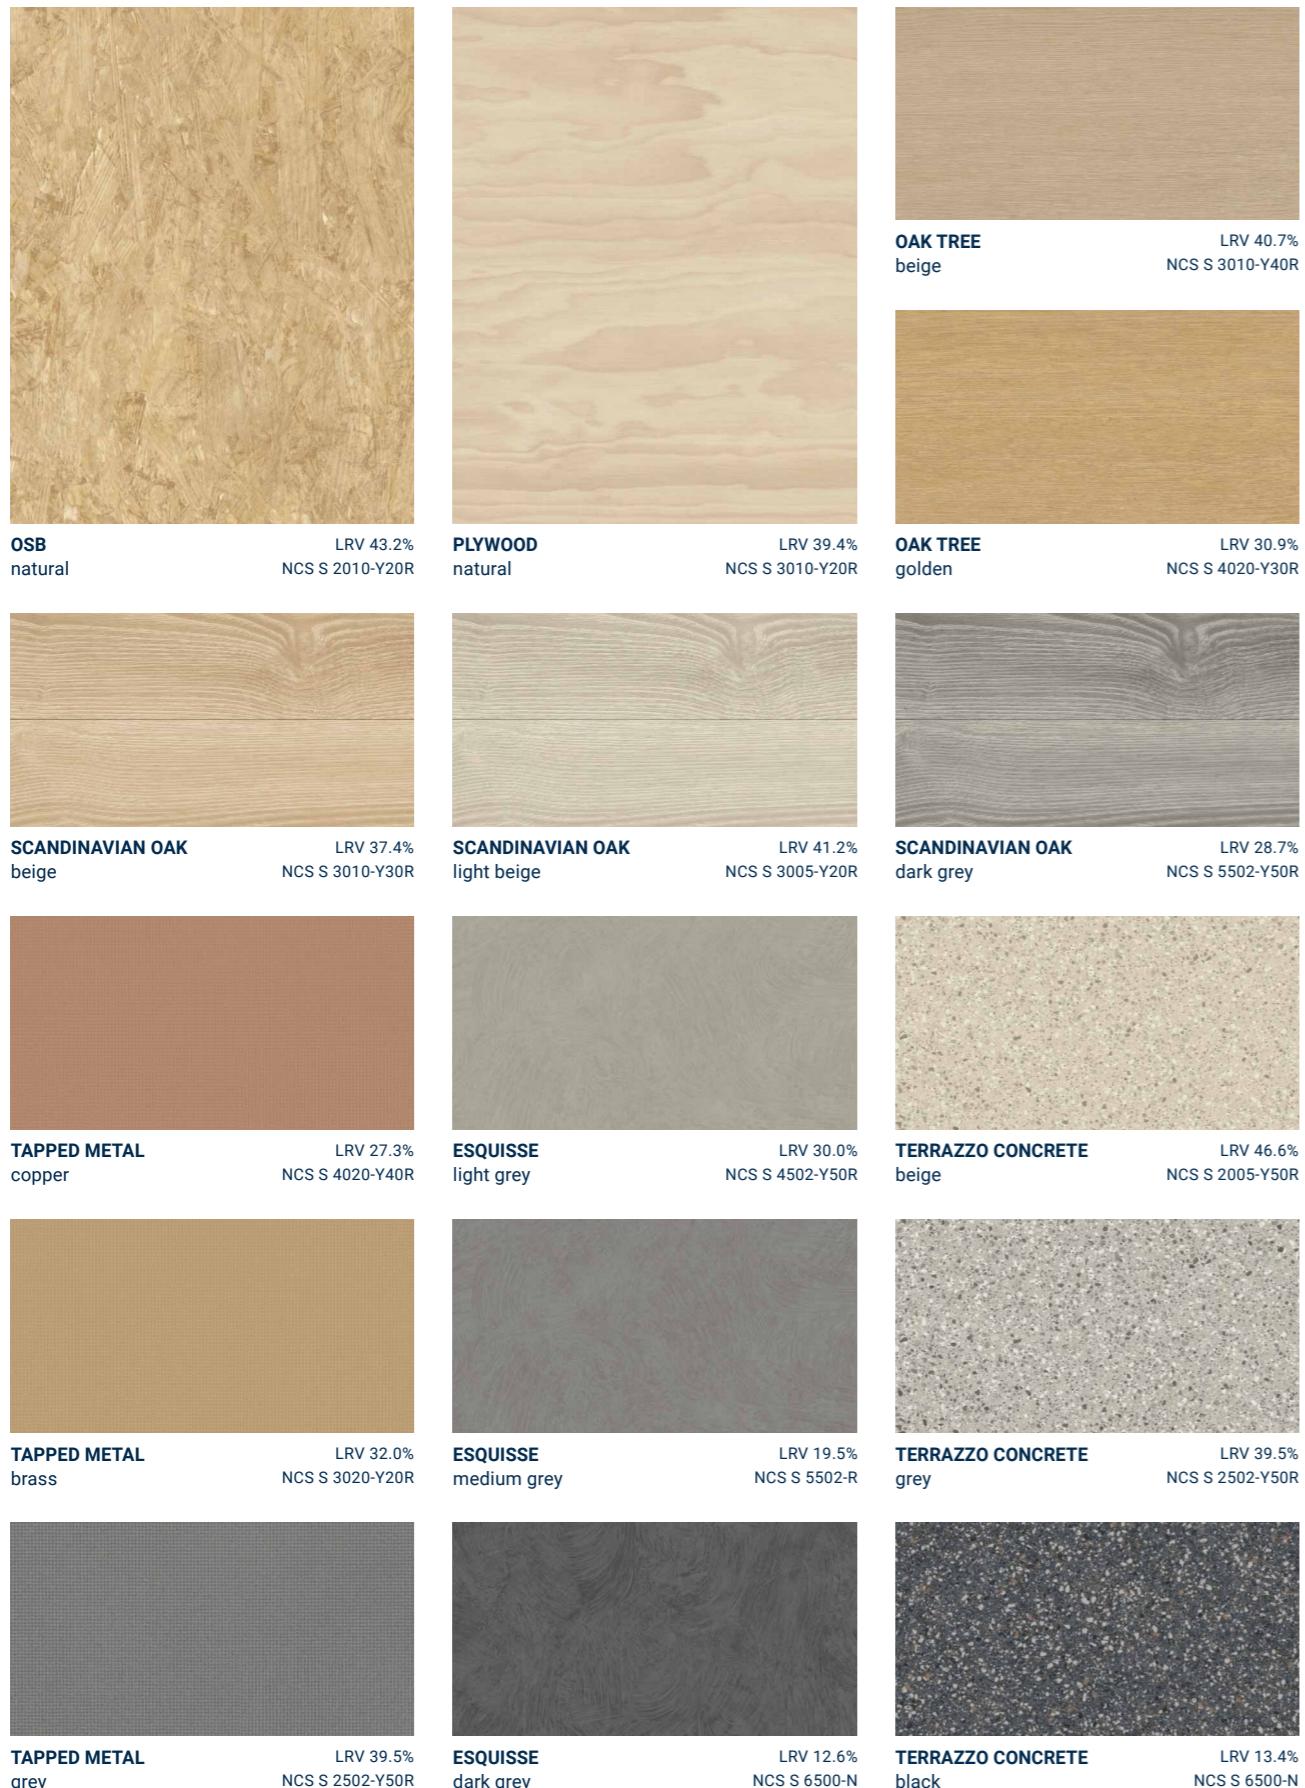

Excellence collection

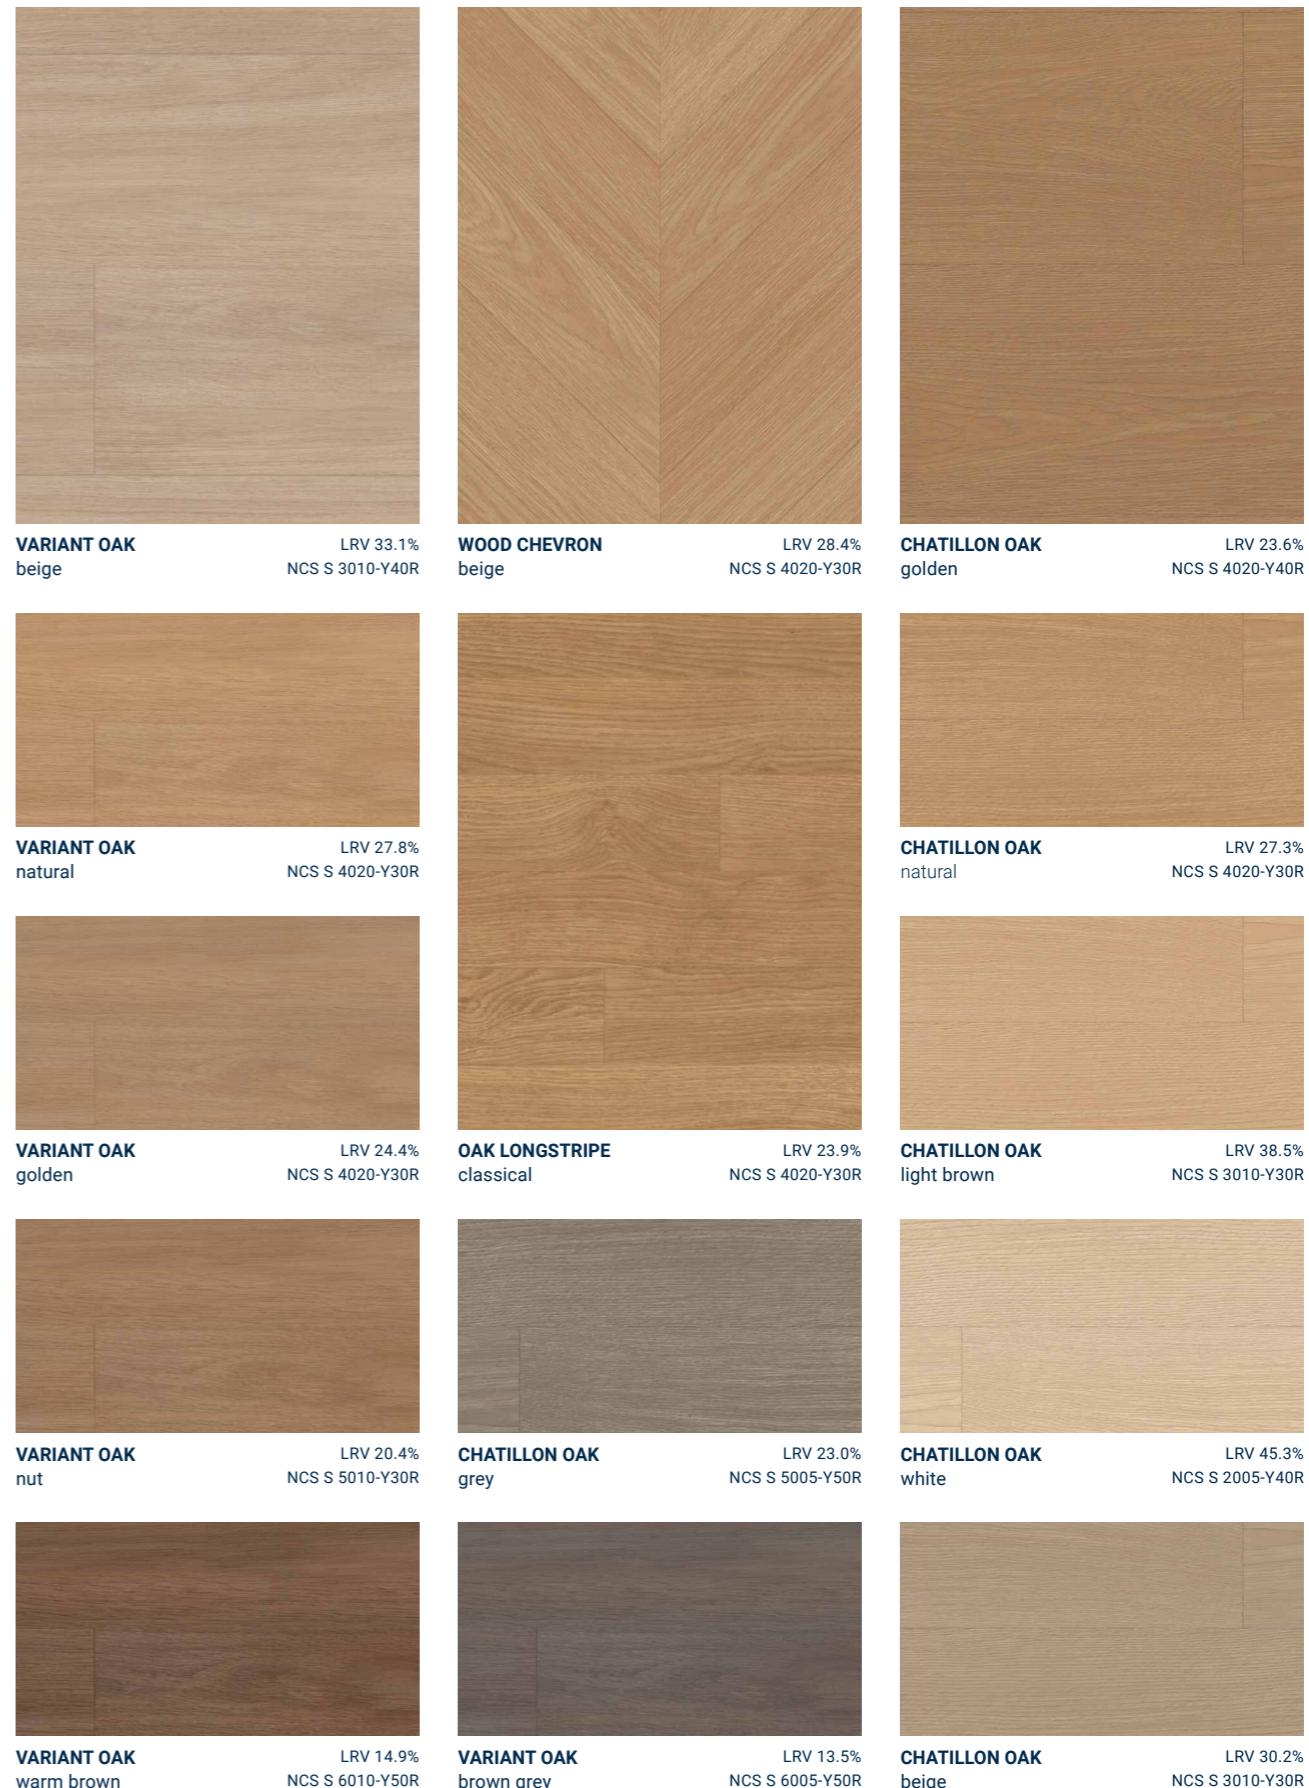

Platinum collection

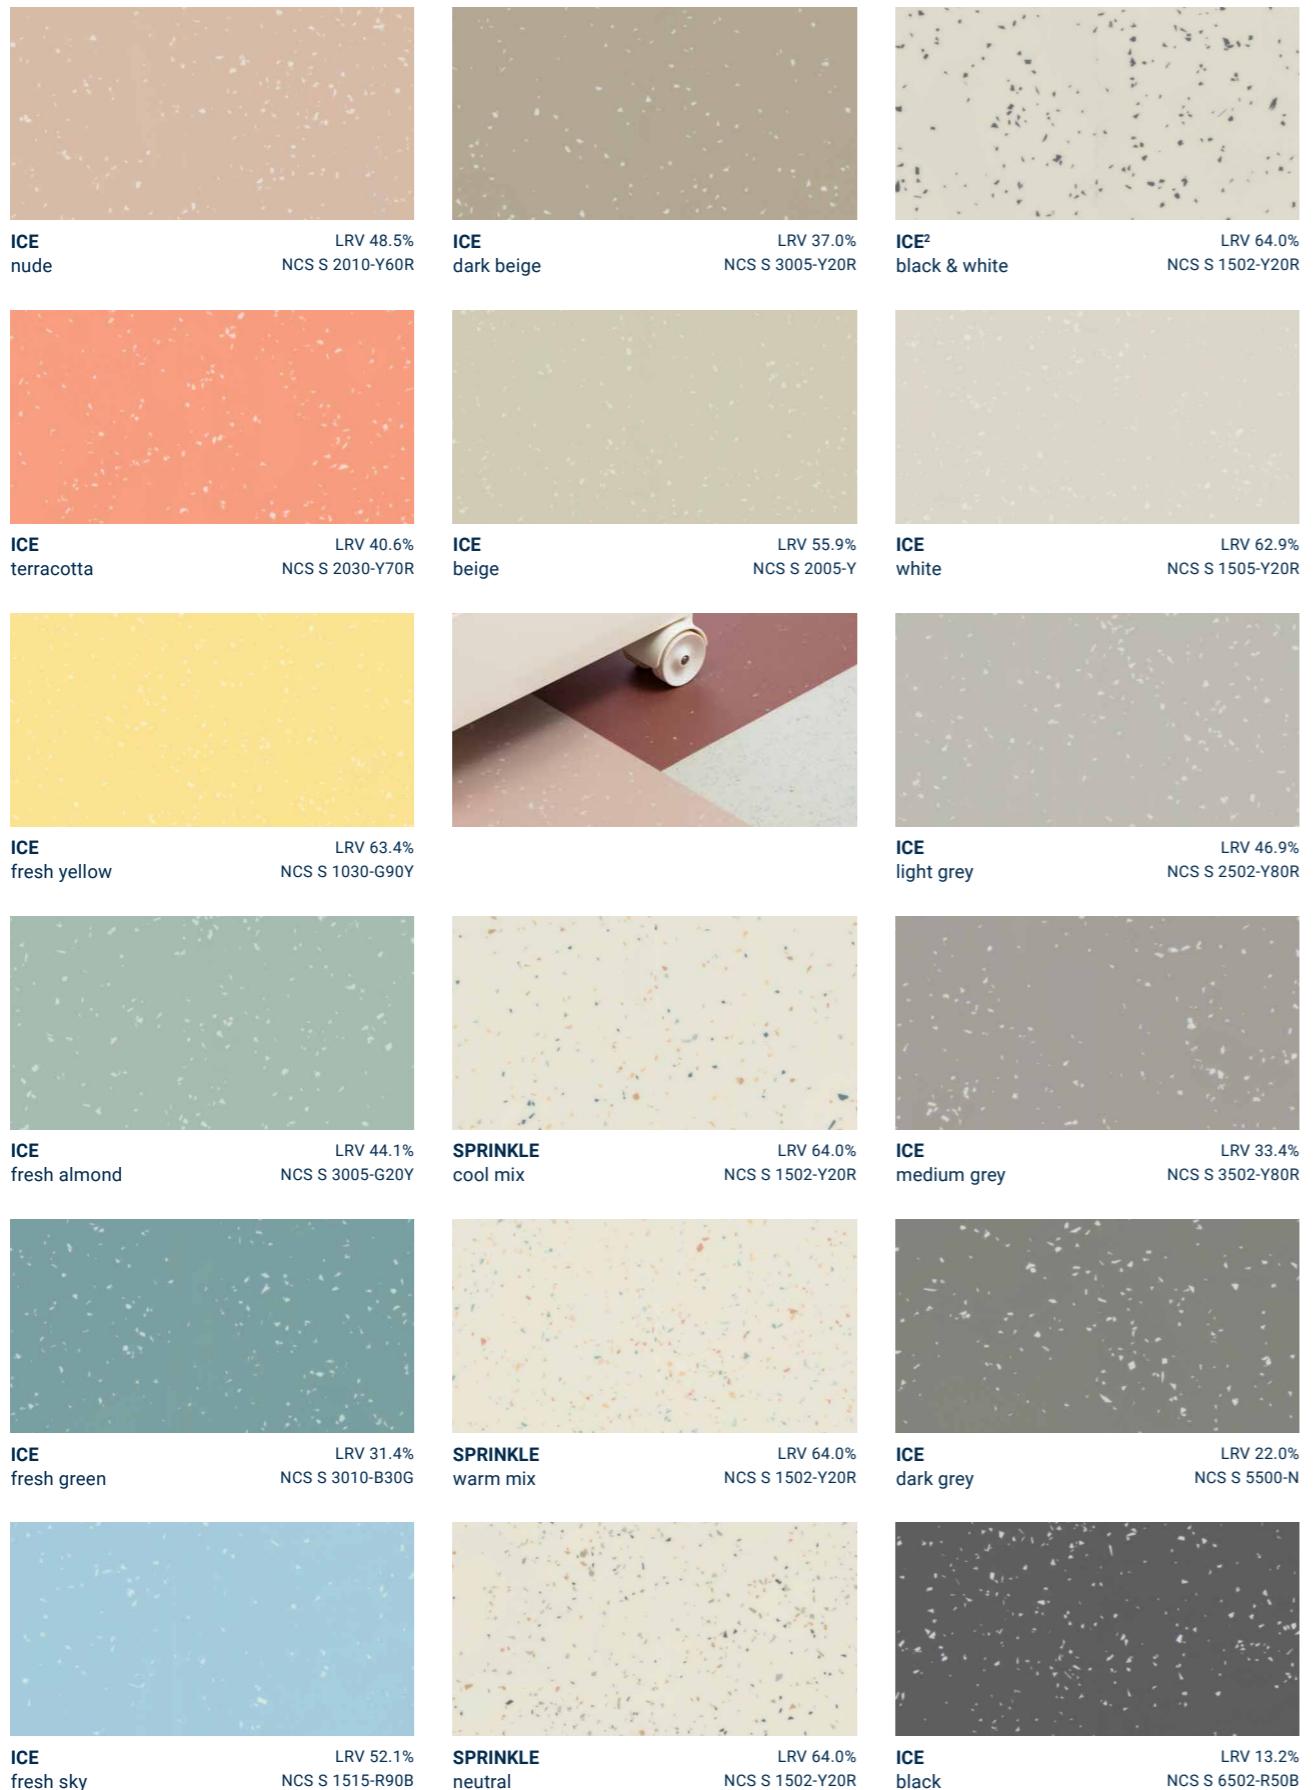

Platinum collection



ProtectWall collection



UNI
terracotta
LRV 31.11%
NCS S 3020-Y60R



UNI
grege
LRV 40.75%
NCS S 3005-Y20R



GEMSTONE
pastel
LRV 71.62%
NCS Background: S 1002-Y50R
NCS Pattern 1: S 3030-R
NCS Pattern 2: S 3030-Y10R
NCS Pattern 3: S 4502-Y80R



UNI
ochre
LRV 51.06%
NCS S 2020-Y20R



UNI
linen
LRV 57.94%
NCS S 2005-Y




PALM
kaki
LRV 66.69%
NCS Background: S 0502-G50Y
NCS Pattern: S 2010-G40Y




UNI
light beige
LRV 69.91%
NCS S 1005-Y20R



UNI
white grey
LRV 70.27%
NCS S 1002-Y50R

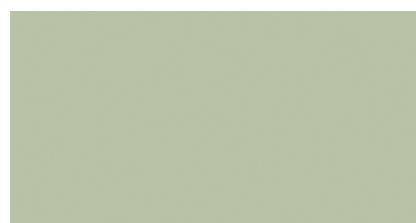

UNI
kaki
LRV 37.91%
NCS S 3010-G40Y



UNI
super white
LRV 87.26%
NCS S 0500-N



PALM
shadow
LRV 78.74%
NCS Background: S 0502-G50Y
NCS Pattern: S 2002-Y20R



UNI
white blue
LRV 57.32%
NCS S 1510-B



UNI
super white CR
LRV 88.22%
NCS S 0502-G50Y



UNI
aqua
LRV 34.76%
NCS S 3010-B50G




UNI
sweet grey CR
LRV 50.96%
NCS S 2502-Y20R


ProtectWall collection



PLYWOOD
natural
LRV 48.94%
NCS Background: S 2010-Y20R
NCS Pattern: S 3010-Y30R

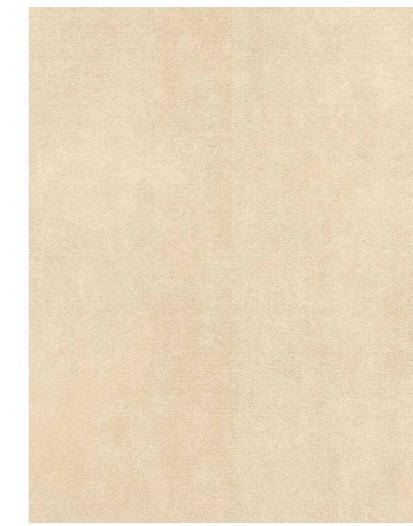

RUSTIC VELVET
copper
LRV 57.94%
NCS S 1505-Y

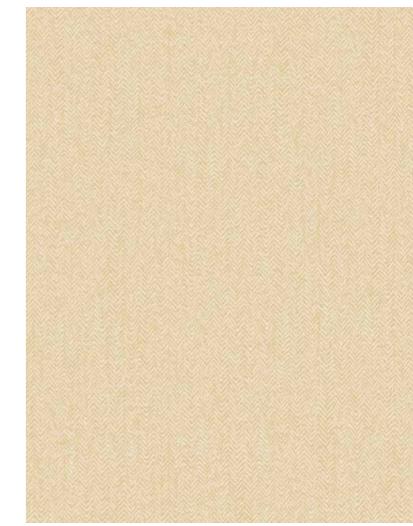

TWEED
ochre
LRV 59.92%
NCS S 1510-Y20R



OAK TREE
natural
LRV 39.53%
NCS S 3010-Y30R



LUXURY CONCRETE
golden
LRV 40.90%
NCS S 3005-Y



TWEED
warm grey
LRV 61.50%
NCS S 1520-Y20R



CONCRETE
cool grey
LRV 35.34%
NCS S 3502-Y50R



BRECCIASTONE
grey
LRV 38.24%
NCS S 3502-Y20R



MARBLE
carraie
LRV 82.72%
NCS S 0502-G50Y

Excellence collection			Accent Excellence Compact+ Tapiflex Excellence Acoustic 19 dB (to be glued)			Accent Excellence Genius Tapiflex Excellence Genius (loose-lay)			Tapiflex Excellence Acoustic 17 dB		Matching welding rods		Skirtings
Design	Colour	NCS	LRV (%)	Accent (Compact+) A	Tapiflex (Acoustic 19 dB) T19	Accent (Genius) G	Tapiflex (Genius) G	Tapiflex (Acoustic 17 dB) T17	Unicolour	Multicolour	Decorative / KS61		
CARPET	brick	S 5010-Y50R	25.7	206012 018	206017 018	—	—	—	1287806	—	206009039		
	dark grey	S 5502-Y80R	19.9	206012 019	206017 019	—	—	—	1287533	—	206009008		
	intense jean	S 5005-R80B	17.8	206012 001	206017 001	206038 001	206039 001	206021 001	1287528	—	206009037		
	moss	S 6005-G50Y	18.6	206012 020	206017 020	—	—	—	1287294	—	206009038		
	ochre	S 4010-Y10R	25.7	206012 021	206017 021	—	—	—	1287373	—	206009012		
	white grey	S 2502-Y	41.3	206012 002	206017 002	206038 002	206039 002	206021 002	1287716	—	206009033		
CHATILLON OAK	beige	S 3010-Y30R	30.2	206012 077	206017 077	206038 077	206039 077	206021 077	1287005	1290137	—		
	golden	S 4020-Y40R	23.6	206012 078	206017 078	—	—	—	1294428	1290301	1411052		
	grey	S 5005-Y50R	23.0	206012 079	206017 079	206038 079	206039 079	206021 079	1287604	1290194	—		
	light brown	S 3010-Y30R	38.5	206012 080	206017 080	—	—	—	1294852	1290368	—		
	natural	S 4020-Y30R	27.3	206012 081	206017 081	206038 081	206039 081	206021 081	1287153	1290303	1411052		
	white	S 2005-Y40R	45.3	206012 082	206017 082	—	—	—	1287764	1290159	—		
CONCRETE	blue	S 4000-N	26.7	206012 022	206017 022	—	—	—	1292767	—	1411053		
	brick	S 4020-Y70R	24.7	206012 023	206017 023	—	—	—	1287955	—	206009039		
	chalk	S 2502-Y50R	45.3	206012 003	206017 003	206038 003	206039 003	206021 003	1287290	—	206009033		
	cool grey	S 3502-Y80R	32.0	206012 004	206017 004	206038 004	206039 004	206021 004	1287789	—	1411053		
	dark grey	S 6502-Y80R	11.6	206012 005	206017 005	206038 005	206039 005	206021 005	1287585	—	206009006		
	deep blue	S 7005-B	10.8	206012 024	206017 024	—	—	—	1287077	—	206009037		
	grey beige	S 4005-Y20R	32.4	206012 006	206017 006	206038 006	206039 006	206021 006	1287713	—	206009013		
	ochre	S 4020-Y10R	26.8	206012 025	206017 025	206038 025	206039 025	206021 025	1287690	—	206009012		
	warm grey	S 6005-Y20R	18.0	206012 008	206017 008	206038 008	206039 008	206021 008	1287870	—	206009014		
	black & white	S 7500-N	8.1	206012 009	206017 009	—	—	—	1287835	—	206009005		
ESQUISSE	dark grey	S 6500-N	12.6	206012 010	206017 010	—	—	—	1287548	—	206009006		
	light grey	S 4502-Y50R	30.0	206012 011	206017 011	206038 011	206039 011	206021 011	1287854	—	206009009		
	medium grey	S 5502-R	19.5	206012 026	206017 026	206038 026	206039 026	206021 026	1287832	—	206009006		
FRAGMENTO	deep black	S 6502-R50B	23.9	206012 034	206017 034	—	—	—	1287844	—	206009005		
	deep brick	S 3020-Y80R	38.5	206012 035	206017 035	—	—	—	1291916	—	206009039		
	deep green	S 4010-B30G	42.9	206012 036	206017 036	—	—	—	1292655	—	1411056		
	deep turquoise	S 3010-R90B	35.8	206012 037	206017 037	—	—	—	1291210	—	206009037		
	deep yellow	S 2030-Y10R	46.6	206012 038	206017 038	—	—	—	1287651	—	206009031		
GOMMETTE	multico	S 1002-Y80R	62.2	206012 027	206017 027	—	—	—	1287946	—	206009004		
GRANITO	warm grey	S 3502-Y50R	36.0	206012 028	206017 028	206038 028	206039 028	206021 028	1287530	—	206009033		
MATRIX ²	dark grey	S 5502-B	17.5	206012 031	206017 031	—	—	—	1287631	—	206010033		
	light grey	S 2502-R	45.5	206012 032	206017 032	—	—	—	1287523	—	206009009		
OAK LONGSTRIPE	classical	S 4020-Y30R	23.9	206012 090	206017 090	206038 090	206039 090	206021 090	1294428	1290103	1411052		
OAK TREE	beige	S 3010-Y40R	40.7	206012 012	206017 012	—	—	—	1287432	1290294	—		
	golden	S 4020-Y30R	30.9	206012 091	206017 091	—	—	—	1287690	1290303	1411052		
OSB	natural	S 2010-Y20R	43.2	206012 033	206017 033	—	—	—	1287686	1290407	—		
PLYWOOD	natural	S 3010-Y20R	39.4	206012 039	206017 039	—	—	—	1287391	1290143	—		
QR CODE	soft aqua	S 2000-N	53.4	206012 040	206017 040	—	—	—	1287875	—	206009004		
	soft brick	S 1505-Y70R	63.0	206012 041	206017 041	—	—	—	1291961	—	206009004		
	soft grey	S 2502-R50B	54.0	206012 042	206017 042	—	—	—	1294680	—	206009004		
	soft sky blue	S 1515-R80B	52.0	206012 043	206017 043	—	—	—	1287902	—	206009004		
	soft yellow	S 1515-Y20R	58.8	206012 044	206017 044	—	—	—	1287771	—	206009004		
QUADRILLAGE	black & white	S 2002-R50B / S 6502-R50B	58.5	206012 045	206017 045	—	—	—	1292459	—	206009005		
SCANDINAVIAN OAK	beige	S 3010-Y30R	37.4	206012 083	206017 083	206038 083	206039 083	206021 083	1287432	—	—		
	dark grey	S 5502-Y50R	28.7	206012 013	206017 013	—	—	—	1287828	1290294	—		
	light beige	S 3005-Y20R	41.2	206012 014	206017 014	206038 014	206039 014	206021 014	1287637	1290377	—		

Excellence collection			Accent Excellence Compact+ Tapiflex Excellence Acoustic 19 dB (to be glued)			Accent Excellence Genius Tapiflex Excellence Genius (loose-lay)			Tapiflex Excellence Acoustic 17 dB		Matching welding rods		Skirtings
Design	Colour	NCS	LRV (%)	Accent (Compact+) A	Tapiflex (Acoustic 19 dB) T19	Accent (Genius) G	Tapiflex (Genius) G	Tapiflex (Acoustic 17 dB) T17	Unicolour	Multicolour	Decorative / KS61		

<tbl_r cells

Platinum collection			Accent Platinum	Tapiflex Platinum	Matching welding rods		Skirtings	
Design	Colour	NCS	LRV (%)	Accent Compact A	Tapiflex (Acoustic 17 dB) T	Unicolour	Multicolour	Decorative / KS61
GROUND	beige	S 4005-Y20R	34.3	206027 303	206029 303	1287963	26761147	206009013
	blue	S 5020-R90B	17.1	206027 304	206029 304	1287023	26761151	206009037
	brick	S 4020-Y90R	22.0	206027 305	206029 305	1289006	26761148	206009039
	chalk	S 2005-Y	57.4	206027 306	206029 306	1291810	26761146	206009033
	green	S 5010-B50G	17.4	206027 307	206029 307	1287961	26761152	1411056
	grey	S 5502-B	18.4	206027 308	206029 308	1287631	26761145	206010033
	kaki	S 5005-G50Y	25.8	206027 309	206029 309	1287958	26761150	206009038
	light blue	S 3005-B50G	44.5	206027 302	206029 302	1292655	26761157	206009034
	light grey	S 3000-N	47.9	206027 300	206029 300	1287638	26761158	206009009
	medium grey	S 4000-N	32.4	206027 301	206029 301	1292767	26761156	206009008
	ochre	S 4020-Y10R	29.0	206027 310	206029 310	1287153	26761149	206009012
ICE	beige	S 2005-Y	55.9	206027 311	206029 311	1287962	26761136	206009033
	black	S 6502-R50B	13.2	206027 312	206029 312	1287836	26761132	206009006
	dark beige	S 3005-Y20R	37.0	206027 313	206029 314	1287178	26761143	206009013
	dark grey	S 5500-N	22.0	206027 314	206029 315	1287454	26761134	206009008
	fresh almond	S 3005-G20Y	44.1	206027 315	206029 316	1287964	26761139	206009004
	fresh green	S 3010-B30G	31.4	206027 316	206029 317	1287965	26761141	206009004
	fresh sky	S 1515-R90B	52.1	206027 317	206029 318	1287939	26761140	206009004
	fresh yellow	S 1030-G90Y	63.4	206027 318	206029 319	1287587	26761138	206009004
	light grey	S 2502-Y80R	46.9	206027 319	206029 320	1287821	26761133	206009004
	medium grey	S 3502-Y80R	33.4	206027 320	206029 321	1287532	26761142	206009009
	nude	S 2010-Y60R	48.5	206027 321	206029 322	1291983	26761144	1411032
	terracotta	S 2030-Y70R	40.6	206027 322	206029 323	1287966	26761137	206009039
	white	S 1505-Y20R	62.9	206027 323	206029 324	1291609	26761135	206009004
ICE ²	black & white	S 1502-Y20R	64.0	206027 324	206029 313	1291609	26761131	206009005
	PLAZZA ²	beige	S 2000-N	56.0	206027 325	206029 325	1287846	26761124
SPRINKLE	black	S 2000-N	56.0	206027 326	206029 326	1287846	26761125	206009010
	coral	S 2000-N	56.0	206027 327	206029 327	1287846	26761126	206009010
	dark blue	S 2000-N	56.0	206027 328	206029 328	1287846	26761127	206009010
	green	S 2000-N	56.0	206027 329	206029 329	1287846	26761128	206009010
	ochre	S 2000-N	56.0	206027 330	206029 330	1287846	26761129	206009010
	yellow	S 2000-N	56.0	206027 331	206029 331	1287846	26761130	206009010
	cool mix	S 1502-Y20R	64.0	206027 332	206029 332	1291609	26761155	206009010
	neutral	S 1502-Y20R	64.0	206027 333	206029 333	1291609	26761153	206009010
	warm mix	S 1502-Y20R	64.0	206027 334	206029 334	1291609	26761154	206009010


ProtectWall collection							
Design	Colour	NCS	LRV (%)	ProtectWALL	ProtectWALL CleanRoom	Matching welding rods	
BRECCIASTONE	grey	S 3502-Y20R	38.24	264993 106	—	24806 200	
CONCRETE	cool grey	S 3502-Y50R	35.34	264991 058	—	24806 117	
	mastic	S 2002-Y	54.30	264991 074	—	24806 201	
GEMSTONE	pastel	Background: S 1002-Y50R Pattern 1: S 3030-R Pattern 2: S 3030-Y10R Pattern 3: S 4502-Y80R	71.62	264991 094	—	24806 202	
LUXURY CONCRETE	golden	S 3005-Y	40.90	264991 096	—	24806 203	
MARBLE	carrare	S 0502-G50Y	82.72	264991 064	—	24806 124	
OAK TREE	natural	S 3010-Y30R	39.53	264991 075	—	24806 204	
PALM	kaki	Background: S 0502-G50, Pattern: S 2010-G40Y	66.69	264991 095	—	24806 205	
	shadow	Background: S 0502-G50Y, Pattern: S 2002-Y20R	78.74	264991 091	—	24806 206	
PLYWOOD	natural	Background: S 2010-Y20R, Pattern: S 3010-Y30R	48.94	264993 104	—	24806 207	
RUSTIC VELVET	copper	S 1505-Y	57.94	264991 097	—	24806 208	
TISSE	grey beige	S 2005-Y20R	51.93	264991 057	—	24806 127	
TWEED	ochre	S 1510-Y20R	59.92	264991 087	—	24806 210	
	warm grey	S 1520-Y20R	61.50	264991 088	—	24806 209	
UNI	aqua	S 3010-B50G	34.76	264991 083	—	24806 211	
	greige	S 3005-Y20R	40.75	264991 098	—	24806 212	
	kaki	S 3010-G40Y	37.91	264991 084	—	24806 213	
	light beige	S 1005-Y20R	69.91	264991 080	—	24806 147	
	linen	S 2005-Y	57.94	264991 100	—	24806 214	
	ochre	S 2020-Y20R	51.06	264991 085	—	24806 215	
	super white	S 0500-N	87.26	264991 077	—	24806 161	
	super white	S 0502-G50Y	88.22	—	264992 061	24806 161	
	sweet grey	S 2502-Y20R	50.96	—	264992 082	24806 216	
	terracotta	S 3020-Y60R	31.11	264991 101	—	24806 217	
	white blue	S 1510-B	57.32	264991 081	—	24806 156	
	white grey	S 1002-Y50R	70.27	264991 079	—	24806 162	

Tapiflex Stairs collection							
Design	Colour	NCS	LRV (%)	LRV (%)	Contrast Rate	TX STAIRS	TX STAIRS SELF-ADHESIVE
CONCRETE STAIRS	chalk	S2502-Y50R / S7502-R	45.3	8.5	81%	206053002	—
	cool grey	S3502-Y80R / S7502-R	32	8.5	73%	206053001	206054017
	dark grey	S6502-Y80R / S4500-N	11.6	42	72%	206053003	206054016
ESQUISSE STAIRS	dark grey	S6500-N / S4500-N	12.6	42	70%	206053004	—
	light grey	S4502-Y50R / S7502-R	30	8.5	72%	20	

Excellence – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX EXCELLENCE 19 dB	TAPIFLEX EXCELLENCE 17 dB	ACC'CENT EXCELLENCE COMPACT+	TAPIFLEX EXCELLENCE GENIUS	ACC'CENT EXCELLENCE GENIUS
Classification	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	-			
	EN ISO 10582	-	-	-	-	Heterogeneous poly(vinyl chloride) floor coverings
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy	34 Very Heavy	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	42 General	43 Heavy	42 General	43 Heavy
Binder content	EN ISO 11638	Type I	Type I	Type I	Type I	-
Binder content	EN ISO 10582	-	-	-	-	Type I
Technical Characteristics	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Wear layer thickness	EN ISO 24340	0.80 mm	0.70 mm	0.80 mm	0.70 mm	0.70 mm
Total thickness	EN ISO 24346	3.25 mm	2.9 mm	2.15 mm	3.50 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m ²	3000 g/m ²	2750 g/m ²	3680 g/m ²	3400 g/m ²
Surface treatment		Teknium®	Teknium®	Teknium®	Teknium®	Teknium®
Installation method		Glue-down	Glue-down	Glue-down	Loose-lay	Loose-lay
Performance for CE Marking	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Declaration of Performance	EN 14041	0120-074-DoP-2024-01	0120-101-DoP-2023-07	0120-103-DoP-2019-06	0120-093-DoP-2019-12	0120-092-DoP-2019-12
Reaction to fire	EN ISO 13501-1	B-s1 glued over any A2 or A1 _{fl} substrate (concrete) C _r s1 glued over any derivate wood substrate	B-s1 glued over any A2 or A1 _{fl} substrate (concrete) C _r s1 glued over any derivate wood substrate	B-s1 glued over any A2 or A1 _{fl} substrate (concrete) C _r s1 glued over any derivate wood substrate	C _r s1 loose-lay on an A1 _{fl} and / or A2 _{fl} substrate (concrete) C _r s1 loose-lay on a wooden sub-floor	B-s1 loose-lay on an A1 _{fl} and / or A2 _{fl} substrate (concrete) C _r s1 loose-lay on a wooden sub-floor
Static Electrical Propensity	EN 1815	Antistatic ($\leq 2 \text{ kV}$)	Antistatic ($\leq 2 \text{ kV}$)			
Thermal resistance	EN ISO 10456	0.04 m ² • K/W	0.02 m ² • K/W			
Slip resistance⁽¹⁾	EN 13893	Class DS ($\mu \geq 0.30$)	Class DS ($\mu \geq 0.30$)			
Technical Performances	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Residual indentation	EN ISO 24343-1	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.10 mm	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.05 mm	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.03 mm	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.12 mm	Required value: $\leq 0.10 \text{ mm}$ Average measured value*: 0.03 mm
Dimensional stability	EN ISO 23999	Required value: $\leq 0.40\%$ Average measured value: $\leq 0.10\%$	Required value: $\leq 0.40\%$ Average measured value: $\leq 0.10\%$	Required value: $\leq 0.40\%$ Average measured value: $\leq 0.10\%$	Required value: $\leq 0.40\%$ Average measured value: $\leq 0.10\%$	Required value: $\leq 0.40\%$ Average measured value: $\leq 0.10\%$
Impact sound reduction - ΔL_w	EN ISO 717 / 2	19 dB	17 dB	8 dB	19 dB	4 dB
Reduction of in-room impact noise	NF S31-074	$L_{\text{IRW}} < 65 \text{ dB}$ - Class A	$L_{\text{IRW}} < 75 \text{ dB}$ - Class B	$L_{\text{IRW}} < 65 \text{ dB}$ - Class A	$L_{\text{IRW}} < 85 \text{ dB}$ - Class C	$L_{\text{IRW}} < 65 \text{ dB}$ - Class A
Slip resistance⁽¹⁾	DIN EN 16165	R10	R10	R10	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage	No damage	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage	No damage	No damage	No damage
Curl resultant to heat	EN ISO 23999	$\leq [8] \text{ mm}$	$\leq [8] \text{ mm}$	$\leq [3] \text{ mm}$	$\leq [2] \text{ mm}$	$\leq [2] \text{ mm}$
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected	Not affected	Not affected	Not affected
Underfloor heating		Suitable	Suitable	Suitable	Suitable	Suitable
Sustainability Performances	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Recyclability through ReStart®		Recyclable	Recyclable	Recyclable	Recyclable	Recyclable
Total VOC emissions	EN 16516	$\leq 10 \text{ } \mu\text{g}/\text{m}^3$ (after 28 days)	$\leq 10 \text{ } \mu\text{g}/\text{m}^3$ (after 28 days)	$\leq 10 \text{ } \mu\text{g}/\text{m}^3$ (after 28 days)	$\leq 10 \text{ } \mu\text{g}/\text{m}^3$ (after 28 days)	$\leq 10 \text{ } \mu\text{g}/\text{m}^3$ (after 28 days)
Formaldehyde emission class	EN 717-1	E1	E1	E1	E1	E1
Dimensions and designs	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Roll		23 x 2 m	23 x 2 m			
Number of designs available		88 + 5 XXL	25	88 + 5 XXL	25	25

The above information is subject to modification for the benefit of further improvement. (01/24). *For information – not binding. – ⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations. According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com. Non contractual pictures. The illustrations do not reflect the actual scale of the products. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

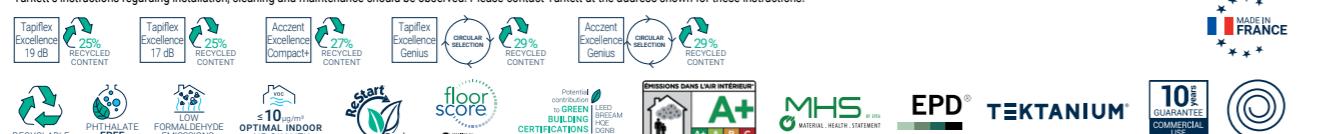

Platinum – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX PLATINUM (SHEET)	ACC'CENT PLATINUM (SHEET)
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	43 Heavy
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	1.02 mm	1.02 mm
Total thickness	EN ISO 24346	3.10 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m ²	3200 g/m ²
Surface treatment		Teknium®	Teknium®
Installation method		Glue-down	Glue-down
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-082-DoP-2019-07	0120-083-DoP-2019-07
Reaction to fire	EN 13501-1	B-s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _r s1 glued over any derivate wood substrate	B-s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _r s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic ($\leq 2 \text{ kV}$)	Antistatic ($\leq 2 \text{ kV}$)
Thermal resistance	EN ISO 10456	0.04 m ² • K/W	0.02 m ² • K/W
Slip resistance	EN 13893	Class DS ($\mu \geq 0.30$)	Class DS ($\mu \geq 0.30$)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.10 mm	Required value: $\leq 0.20 \text{ mm}$ Average measured value*: 0.04 mm
Dimensional stability	EN ISO 23999	Average measured value: $\leq 0.10\%$	Average measured value: $\leq 0.10\%$
Impact sound reduction – ΔL_w	NF EN ISO 717 / 2	17 dB	9 dB
Reduction of in-room impact noise	NF S31-074	$L_{\text{IRW}} < 65 \text{ dB}$ – Class A	$L_{\text{IRW}} < 75 \text{ dB}$ – Class B
Slip resistance⁽¹⁾	DIN 51130	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	$\leq [8] \text{ mm}$	$\leq [8] \text{ mm}$
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum ($\leq 10 \text{ } \mu\text{g}/\text{m}^3$)	Platinum ($\leq 10 \text{ } \mu\text{g}/\text{m}^3$)
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs	Norm	Tarkett Value	Tarkett Value
Roll		2 x 23 m	2 x 23 m
Number of designs available		35	35

The above information is subject to modification for the benefit of further improvement. (01/24). *For information – not binding. – ⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com. Non contractual pictures. The illustrations do not reflect the actual scale of the products. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



ProtectWall – Technical Data

TECHNICAL DATA	STANDARD	PROTECTWALL 1.5 B-S2	PROTECTWALL CLEAN ROOM
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN 259-1 EN 14644-1	Heavy duty wall covering – Cleanroom suitable Designed with a dedicated embossing to ensure hygiene in Cleanroom	Heavy duty wall covering
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Total thickness	EN ISO 24346	1.50 mm	1.50 mm
Total weight	EN ISO 23997	2400 g/m ²	2400 g/m ²
Wear layer thickness	EN ISO 24340	0.15 mm	0.15 mm
Surface treatment	Top Clean XP™	Top Clean XP™	
Installation method	Glue-down	Glue-down	
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 15102	0132-0065-DoP-2022-10	0132-0065-DoP-2022-10
Reaction to fire	EN 13501-1	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate
Technical Performances	Norm	Tarkett Value	Tarkett Value
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Impact Resistance	EN 259-2	Resistant to impacts No visible burst nor crack	Resistant to impacts No visible burst nor crack
Chemical resistance	ISO 26987	Not affected	Not affected
Spongeability, washability, liability, brushability	EN 12956	Super washable and brushable	Super washable and brushable
Determination of flexibility	ISO 24344	No damage, no crack	No damage, no crack
Seam strength	ISO 16906	Average Value: ≥ 250 N/50 mm	Average Value: ≥ 250 N/50 mm
Bacteria resistance	ISO 846 part C	No bacterial growth	No bacterial growth
Cleanability/Riboflavin Test	ISO 4628-1 – VDI 2083 P17	0 – Excellent	0 – Excellent
Contamination control	EN 14644-1	–	Cleanroom suitable
Ease of decontamination	ISO 8690	–	Good
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Carbon Footprint (Cradle-to-Gate, EPD Modules A1- A3)		4.40 kg CO ₂ eq /m ²	4.40 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		5.94 kg CO ₂ eq /m ²	5.94 kg CO ₂ eq /m ²
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)	Platinum (≤ 10 µg/m ³)
Formaldehyde emission class	E1	E1	
Dimensions and designs	Norm	Tarkett Value	Tarkett Value
Roll		2 × 20 m	2 × 20 m
Number of designs available		24	2

The above information is subject to modification for the benefit of further improvement. (01/24).

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Tapiflex Stairs – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX STAIRS	TAPIFLEX STAIRS SELF-ADHESIVE
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	43 General
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	0.85 mm	0.85 mm
Total thickness	EN ISO 24346	3.30 mm	3.30 mm
Total weight	EN ISO 23997	3250 g/m ²	3250 g/m ²
Surface treatment	Top Clean XP®	Top Clean XP®	Top Clean XP®
Installation method	Glue-down	Self-Adhesive	Self-Adhesive
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-025-DoP-2013-04	0120-0069-DoP-2014-12
Reaction to fire	EN ISO 13501-1	B-s1 glued over any A2 _e or A1 _e substrate (concrete) B _r -s1 glued over any derivate wood substrate	C _r -s1 glued over any A2 _e or A1 _e substrate (concrete) C _r -s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m ² • K/W	0.04 m ² • K/W
Slip resistance	EN 13893	Class DS ($\mu \geq 0.30$)	Class DS ($\mu \geq 0.30$)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Average measured value*: 0.17 mm	Required value: ≤ 0.20 mm Average measured value*: 0.17 mm
Dimensional stability	EN ISO 23999	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%
Impact sound reduction – ΔL _w	EN ISO 717 / 2	18 dB	18 dB
Reduction of in-room impact noise	NF S31-074	Class A (≤ 65 dB)	Class A (≤ 65 dB)
Slip resistance ⁽¹⁾	DIN EN 16165	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)	≤ 100 µg/m ³
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs		Tarkett Value	Tarkett Value
Roll		1 × 23 m	1 × 23 m
Number of designs available		15	5

The above information is subject to modification for the benefit of further improvement. (01/24).

*For information – not binding. – ⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Non contractual pictures. The illustrations do not reflect the actual scale of the products.

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ **WESTERN EUROPE:** **Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 52 26 24 11 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH – Tel. +49 621 68172 300 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett BV – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** **Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett org. složka – Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizácia zložka – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co.,Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** **Tarkett International:** Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** **Tarkett Middle East:** Tel. +961 1 53363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett – Tel. 55 12 3954 7108 ■ **Argentina – Chile – Uruguay:** Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia – Colombia – Ecuador – Panama – Paraguay – Peru – Trinidad and Tobago – Venezuela:** Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico /Central America:** Tarkett Latam Mexico – Tel. +55 11 98410 9310

03/2021 - 260003044

The designs and photos used in this brochure are for illustration purposes only. They are not contractual images and do not stand for product recommendation.
Design & Photo: Studio 5•5 Designers

