

Heterogeneous vinyl

Play to win

OMNISPORTS



INDEX

WHY CHOOSE TARKETT SPORTS	4
SPORTS SURFACE STANDARD - EN14904	6
WHY CHOOSE OMNISPORTS?	8
HOW TO CHOOSE YOUR SPORTS SURFACE?	10
OMNISPORTS VINYL SPORTS SOLUTIONS	12
SOLUTION GUIDE	13
THE OMNISPORTS COLLECTION	
OMNISPORTS VINYL - LEISURE & WELLNESS	14
OMNISPORTS VINYL - P1	16
OMNISPORTS VINYL - P2	18
OMNISPORTS VINYL - SPECIALITIES	20
CHOOSE YOUR COLOURS	22
3 INSTALLATION POSSIBILITIES	24
OUR COMMITMENT TO CLEANLINESS	26
OUR EXPERTISE AT YOUR SERVICE	28
OUR COMMITMENT TO THE PLANET	30
ACCESSORIES	32
COMPLEMENTARY SOLUTIONS	33
SOME OF OUR INTERNATIONAL REFERENCES	34
PRODUCT LISTING	36
TECHNICAL DATA	37

Heterogeneous vinyl

OMNISPORTS

With a **wide range of flooring solutions**, meeting the utmost sports performances, **Tarkett Sports** helps you throughout your renovation or new building project.

Our absolute priority is to **meet sportsmen and women's expectations, in their different playing environments**. That's why we are continuously working with international sports bodies and **improving our sports surfaces**.

This expertise enables **Tarkett Sports** to provide flooring solutions, which target the **specific design and performance requirements** of different profiles of athletes, across a range of physical activities.

The complete range of **Omnisports** vinyl indoor flooring **meets the intense demands** of sports and recreation environments **better than any sports floor on the market**. **Omnisports** indoor flooring **exceeds the highest environmental and health standards** allowing sports to be played in **stimulating and safe surroundings**. From basketball to volleyball, and yoga to futsal, **Omnisports** indoor flooring accommodates **any level of play, any budget and a variety of non sporting events**.

Tarkett Sports is the only solution provider to offer a **truly segmented approach** for the requirements of all indoor sports activities. For every area, we help you find **the right product to meet your requirements**.

Do you have a project? Challenge us!

**TARKETT SPORTS IS A WORLD LEADER
IN ATHLETIC SURFACES, OFFERING COMPLETE SOLUTIONS OF
INDOOR AND OUTDOOR SPORTS FLOORINGS, THROUGH ITS MULTIPLE OF OWN BRANDS.
OUR MISSION: TO OFFER SUSTAINABLE SPORTS SURFACES THAT MAKE
THE DIFFERENCE FOR ATHLETES, IN PUBLIC AND PRIVATE FACILITIES.**



A EUROPEAN LEADER

Tarkett Sports is a French group with our head office based in Paris - La Défense. Our solutions are manufactured in our technologically advanced European factories: Vinyl and Synthetic turf (France), Linoleum (Italy), Wood (Sweden).



A SUSTAINABLE LEADER

Our solutions help to create pleasant sports areas in a healthier environment, thanks to permanent innovations in product design, environmental friendly factories and end of life recycling programmes.



AN INNOVATIVE LEADER

Inventor of synthetic turf systems: 3G, Core fibre, ProMax Hydroflex filling, the intelligent Genius system and Omnisports vinyl with the exclusive GreenLay™ installation method.



AN EXPERIENCED LEADER

Almost 100 million sqm installed, more than 20,000 sites in the world and as many satisfied customers.



A NETWORK OF EXPERTS

Tarkett Sports works with its teams and the most experienced and competent local partners in the industry, for the design and installation of your sports facilities.



A LEADER AT YOUR SERVICE

We are as committed to your project as you are. When you choose Tarkett Sports, you choose a company that knows how to take care of you and the players.



They share their experience...



Partnering with FieldTurf was an easy decision for me and my company. Having experienced their product first-hand and understanding Tarkett Sports commitment to innovation and customer service, makes this an exciting opportunity.



RICHIE GRAY
COACH AND MANAGING
DIRECTOR
MONTPELLIER - HERAULT
RUGBY



We wanted to bring dynamism and create a friendly space for this sports facility through the use of colours. The variety of Omnisports' colour palette allowed us to think outside the box and let our imagination roam free. We were able to create an original environment that was very well received by the players and the City.



LUDOVIC GAILLOT
ARCHITECT -
PELLEAU & ASSOCIÉS



Thanks to the efforts of a motivated team and an hybrid turf system, we now have one of the best fields in the English Premier League. The GrassMaster system allows us to keep draining playing surface, stable and homogeneous.



LEE JACKSON
GARDEN KEEPER
MANCHESTER CITY



...the flooring system works magnificent. We have also been able to host our graduation in here. So in other words, we were able to insure that the flooring can provide sports, but also any other events that a school might want to use in a gymnasium...



BRYAN NIXON
HEAD OF SCHOOL,
WHITBY SCHOOL
GREENWICH,
CONNECTICUT

EN 14904

The EN 14904 standard is the basis of the EC marking for indoor sports surfaces. This standard is mandatory and specifies certain requirements for sports flooring in indoor facilities. The standard guarantees a safe and adapted surface for sports performance and comfort, as well as a durable and resistant flooring throughout its lifespan.

REQUIREMENTS FOR SAFETY IN USE	STANDARDS	REQUIREMENTS
Shock absorption	EN 14808	≥ 25%
Friction	EN 13036-4	80-110
Vertical deformation	EN 14809	≤ 5MM

TECHNICAL REQUIREMENTS	STANDARDS	REQUIREMENTS
Vertical ball behaviour	EN 12235	≥ 90%
Resistance to a rolling load	EN 1569	≤ 0.5MM
Resistance to wear	EN ISO 5470-1	< 1G
Reaction to fire	EN 13501-1	ACCORDING TO STANDARD
Resistance to indentation	EN 1516	< 0.5MM
Resistance to impact	EN 1517	< 0.5MM
Formaldehyde emission and content of pentachlorophenol	EN 717-1 EN 717-2	DECLARATION
Specular reflectance	EN 13745	ACCORDING TO STANDARD
Specular gloss	EN ISO 2813	≤ 30% AT 85° ANGLE



1 SUPERIOR PERFORMANCE AND LONGTERM SAVINGS

OMNISPORTS IS BACKED WITH A SINGLE SURFACE EMBOSSING COMBINED WITH TOPCLEAN XP™ SURFACE TREATMENT

- **Consistent surface texture and friction:** Provides the same high level of performance, whatever the colour or design.
- **Superior performance and protection:** Grants athletes the proper balance of surface friction and grip control for enhanced game play and increased protection.
- **Ease of maintenance:** Provides superior resistance to stains and scratches thanks to TopClean XP™ surface treatment. **Just wash, rinse and you're done.** Omnisports single surface embossing repels dirt keeps aesthetic and clean appearance with no "5 o'clock shadow effect".
- **Longterm savings:** Omnisports keeps its performance and appearance throughout its lifespan. It requires less mechanical cleaning and periodical maintenance with no need for wax or polish. **Save up to 25% on maintenance and cleaning budget.**



2 EXTREME PROTECTION AND DURABILITY

VINYL WEAR LAYER

- **Long lasting protection:** Provides higher protection for the floor covering design than equivalent products on the market with **30% thicker wear layer**⁽¹⁾
- **Extreme mechanical resistance:** Omnisports provides **2X more resistance** to wear, scratches and abrasion than any equivalent product on the market⁽²⁾
- **Optimal stain resistance:** Our engineered wear layer made from pure vinyl provides enhanced resistance to even the most persistent of stains.

3 DYNAMIC COLOURS AND REALISTIC DECORS


HIGH DEFINITION PRINTING FOR A REALISTIC WOOD SURFACE APPEARANCE AND BUILT-IN UNIS FOR HIGHER COLOUR INTENSITY

- **Endless design possibilities:** Learn more about Omnisports design options page 22.

4 EXTREME PERFORMANCE AND ENHANCED GAME EXPERIENCE **NEW!**

OMNISPORTS X3LT - EXTREME 3 LAYERS TECHNOLOGY

- **Boosted sports experience:** XCS aerated high cell density cushion offering improved shock absorbing comfort while providing better indentation recovery unequaled with any other similar product in the market. This engineered cushioning technology also assists with excellent fatigue reduction allowing longer and safer play time for both recreational and competitive athletic activities.
- **Outstanding dimensional stability:** **3X** better than equivalent products on the market⁽³⁾, (<0.10%) which allows for the unique GreenLay™ installation method 98% adhesive free⁽⁴⁾
- **Superior fatigue reduction and lower deformation:** XCS high-quality expanded cellular cushion combined with our durable resilient calendared layer and extremely tough reinforcing glass veil provides superior fatigue reduction, better sports performance, and higher resistance to rolling and static loads compared to similarly constructed products. Our advanced technology provides continuous performance for product's lifespan⁽⁵⁾.

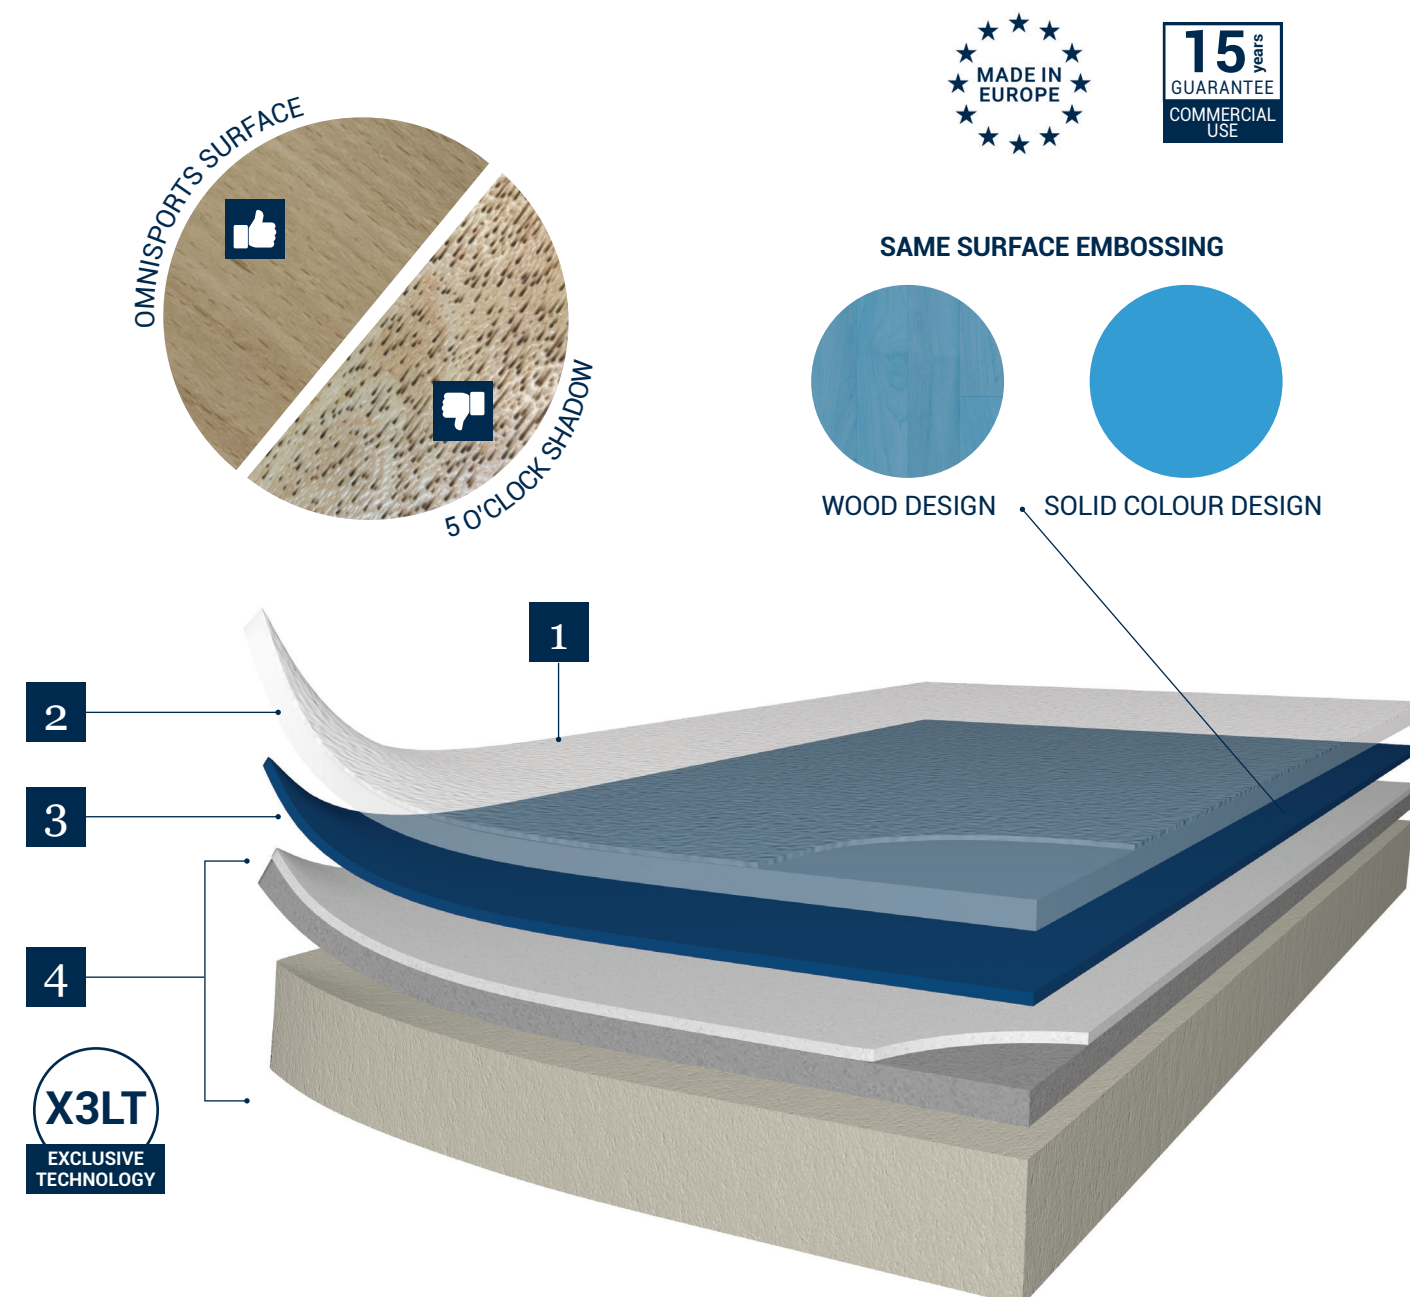


(1) Based on ISO 24340 standard
 (2) Abrasion test result according to EN ISO 5470-1
 (3) Based on ISO 23999 standard
 (4) Learn more about GreenLay™ exclusive installation method page 25
 (5) Lifespan = 15 years

PLAY IN SAFER ENVIRONMENT PROTECTING ATHLETES IS OUR ABSOLUTE PRIORITY

SHOCK ABSORPTION

Omnisports provides different levels of shock absorption, impact deflection, friction and playing characteristics adapted to the different ages, weights and skill levels of sports users.



<25%
Shock absorption

Non EN 14904
Certified


Specific surface embossing



≥25%
Shock absorption

Omnisports EN 14904
Certified*

High-quality expanded cellular cushion

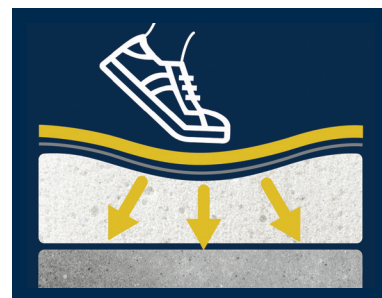


P1 - Light to medium
weight players
Ideal for school, leisure
and extra sportive use
Best option: Omnisports
Reference *Multi-use*



P2 - All types of players
Ideal for competition, frequent
and intense trainings
Best option: Omnisports
Active+ & Pureplay

FRICTION

Omnisports' homogeneous top embossing and surface treatment, provide the proper balance of friction and grip control. It contributes to limiting friction burn risks and provides safer protection with anti-slip grip on all patterns and colours.



Better grip control when sliding
to support sport movement.

*Omnisports Reference *Multi-use*, Active+ & Pureplay.

PLAY IN HEALTHIER INDOOR SPACES A HEALTHY ATHLETE IS A BETTER ATHLETE

Indoor air quality is essential for athletes' health and especially children who are exposed to higher risk of indoor pollution due to immature lungs.

EXPOSURE RISK WITH INDOOR POLLUTION



Without
sports activity



Athletes
during sports activity



Children
during sports activity

That's why choosing a sports flooring made from carefully selected materials that contributes to better indoor air quality is key for any project.

OMNISPORTS CARES ABOUT INDOOR AIR QUALITY



RECYCLABLE



BIOCIDE
FREE



PHTHALATE
FREE



≤10 µg/m³
OPTIMAL INDOOR
AIR QUALITY




Learn more about our commitment to the planet page 30.


PERFORM WITH PLEASURE AND COMFORT FOCUS ON THE GAME

Omnisports products are designed with cushion vinyl backing* that reduces noise levels and provides optimal acoustic comfort.

ACOUSTIC REDUCTION AND COMFORT

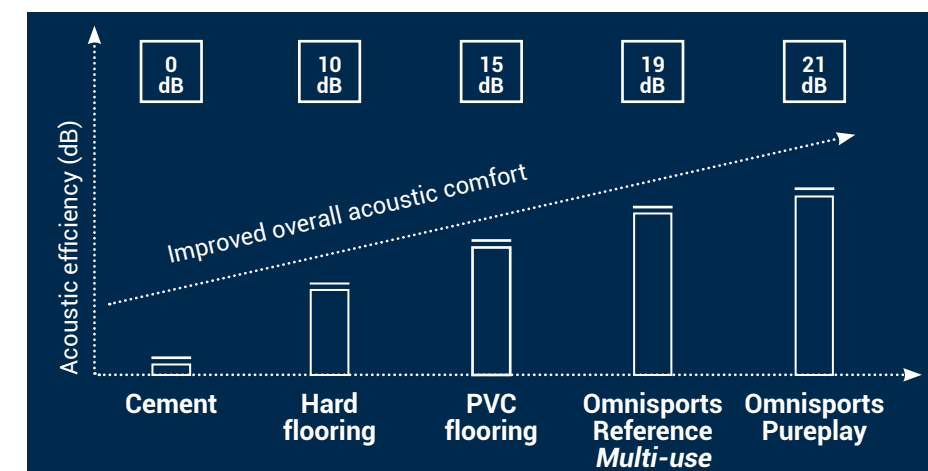

*Except Omnisports Compact

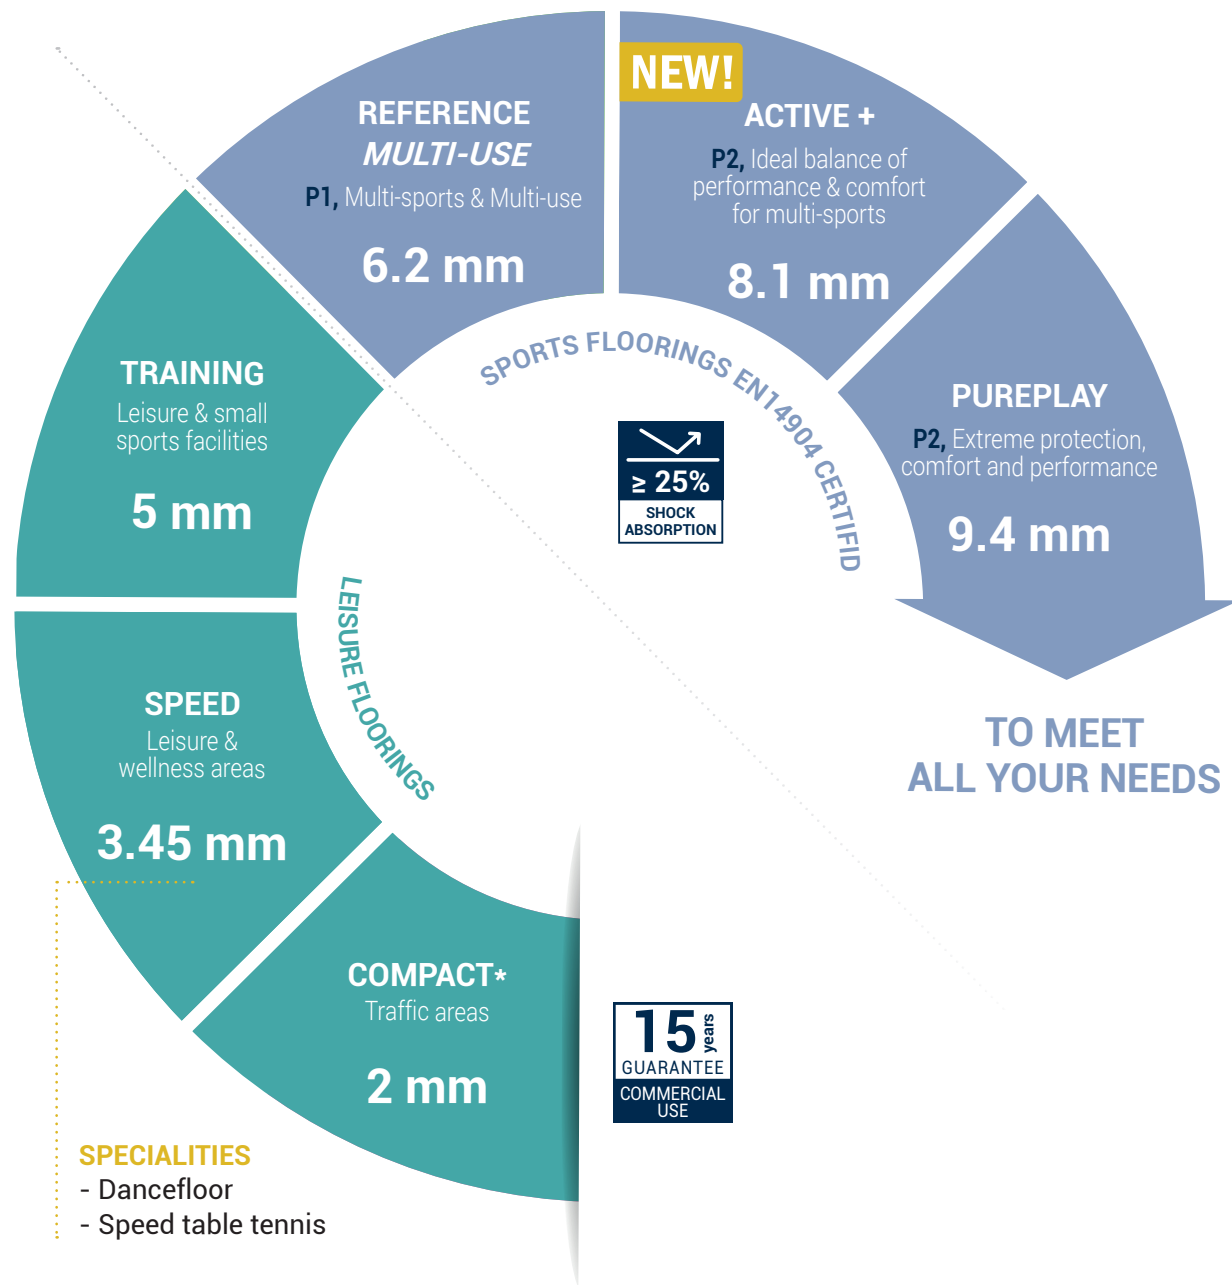


* To comply with the EN standard, Omnisports Compact, must be combined with a Lumaflex Energy or Evolution subconstruction. Please refer to our Lumaflex documentation.

SOLUTION GUIDE A dedicated solution for each area

- Highly recommended
 - Highly recommended with Lumaflex sub-construction
 - Suitable
- * Except electric wheelchairs

OMNISPORTS								
	LEISURE FLOORINGS					EN14904 CERTIFIED FLOORINGS		
	COMPACT	SPEED	SPEED TABLE TENNIS	DANCEFLOOR	TRAINING	REFERENCE MULTI-USE	ACTIVE +	PUREPLAY
	p. 12	p. 12	p. 18	p. 19	p. 13	p. 14	p. 16	p. 16
Multi-sports						●	●	●
Multi-use	○					●		
Basketball						●	●	●
Volley-ball						○	●	●
Handball						○	●	●
Futsal						●	●	●
Table tennis			●		●	●		
Badminton						●	●	●
Fitness - aerobics					●	●	●	
Fitness - cardio (bikes, tradmills, rowing machines,...)	●	●						
Wellness centres		●			●			
Roller sports and handisports	○					○*		
Ballet dance				●				
Yoga					●	●	●	●
Tai Chi					●	●	●	●
Traffic areas (corridors, entrance halls, meeting rooms,...)	●							

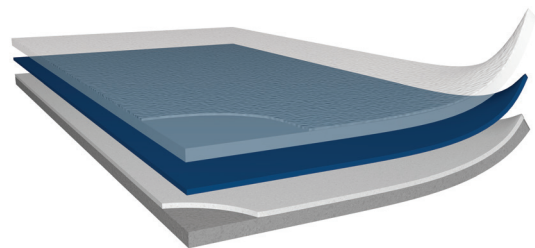

COMPACT 2.0 MM

Ideal flooring for traffic areas

KEY FEATURES

- Excellent resistance to indentation marks: **0.10 mm**
- Easy circulation of rolling loads.
- Suitable for installation with Lumaflex Energy or Evolution sub-construction: area-elastic system (A4), ideal for multi-sports facilities and light multi-use purposes.



APPLICATIONS

Traffic areas: corridors, lockers*, entrance halls, meeting rooms, cardio (bikes, treadmill, rowing machines, etc.)




FORMAT



Roll
2m x 23 lm

* Without direct access to wetrooms

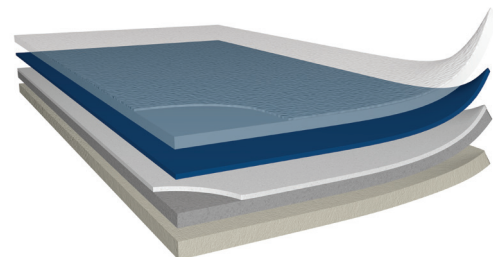

SPEED 3.45 MM

Ideal for walking and acoustic comfort in fitness, leisure and wellness areas

KEY FEATURES

- Walking and acoustic comfort.
- High resistance to indentation marks: **0.18 mm**
- High resistance to rolling loads.



APPLICATIONS


Fitness, wellness centres, boxing, etc.



FORMAT



Roll
2m x 20.5 lm

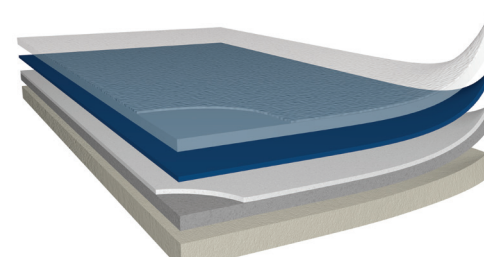

TRAINING 5.0 MM

Ideal for small sports facilities and leisure areas

KEY FEATURES

- Good shock absorption level: **18%.**
- Good walking and acoustic comfort.
- Excellent resistance to indentation marks: **0.11 mm**



APPLICATIONS

Fitness, wellness centres, yoga, tai chi, aerobics, boxing, rehabilitation centres, etc.




FORMAT



Roll
2m x 20.5 lm



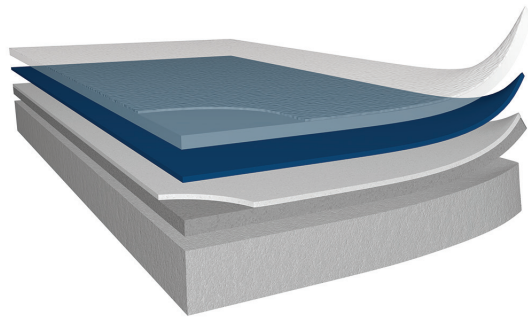

REFERENCE *MULTI-USE* 6.2 MM

Ideal flooring for multi-sports practice
and non-sporting events



KEY FEATURES

- P1 level shock absorption: **≥25%**.
- Exceptional resistance to static loads (chairs, tables, bleachers,...): **≤0.10 mm***.
- Superior resistance to heavy rolling loads (trolleys...).
- Resistance to stains and scratches: **0.70 mm vinyl wear layer**.
- Available with **GreenLay™** exclusive installation method: **98% adhesive-free****.



APPLICATIONS

Multi-sports: basketball, volley-ball, handball, badminton, futsal... and non sporting events: exams, elections, balls, public meetings, associative meetings...




FORMAT



Roll
2m x 20.5 lm

*Chair with 80kg person during 5h.
**See page 25



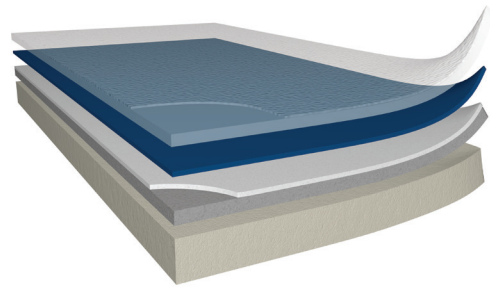

NEW!

ACTIVE +
8.1 MM

Ideal balance of performance
& comfort for multi-sports

KEY FEATURES

- P2 level shock absorption: **≥35%**.
- Good underfoot and acoustic comfort.
- Uniformly reactive surface for consistent ball bounce.
- Resistance to stains and scratches:
0.70 mm vinyl wear layer.
- Available with GreenLay™ exclusive installation method: **98% adhesive-free***.



APPLICATIONS

Multi-sports team: volley-ball, handball, badminton, basketball, futsal...
And individual: tai chi, gymnastics, etc.




FORMAT



Roll
2m x 20.5 lm

* See page 25

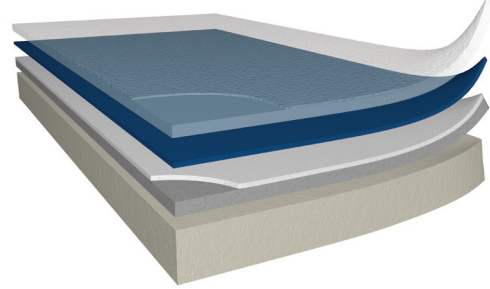

PUREPLAY
9.4 MM

Extreme protection,
comfort and sports performances

KEY FEATURES

- P2 level shock absorption: optimized cushion-vinyl construction: **6.5mm** foam for excellent performance.
- Excellent underfoot comfort for enhanced game experience and protection for athletes.
- Resistance to stains and scratches:
0.80 mm vinyl wear layer.
- Available with GreenLay™ exclusive installation method: **98% adhesive-free***.



APPLICATIONS

City sportshalls with multi-sports usages:
basketball (up to competition level), handball, volley-ball, etc.




FORMAT



Roll
2m x 20.5 lm



P2
MULTI-SPORTS:
COMFORT
& PERFORMANCE

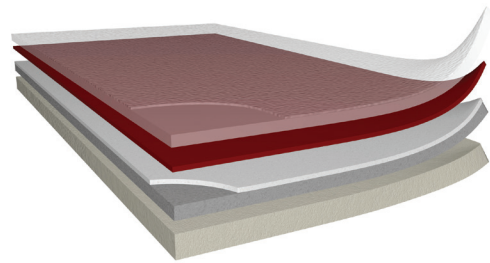

SPEED TABLE TENNIS 3.45 MM

Textured sports surface
ideal for table tennis practice

KEY FEATURES

- Balanced grip thanks to textured surface with specific embossing.
- Superior resistance to indentation marks: tables, etc.
- Underfoot comfort.

APPLICATIONS



AVAILABLE COLOURS



Red


FORMAT



Roll
2m x 15.20 lm



* For permanent installations

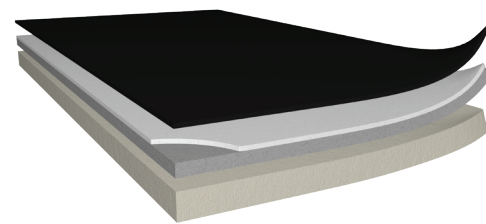

DANCEFLOOR 3.45 MM

The ideal solution for dance studios
professional and amateur classic ballet

KEY FEATURES

- Excellent grip.
- Reduced risk of injury.
- Increased performance.

APPLICATIONS



AVAILABLE COLOURS



Grey



Black

FORMAT



Roll
2m x 15 lm



Metropolitan Ballet Academy - Montreal, Canada

A LARGE PALETTE OF 24 MODERN AND VIBRANT COLOURS & DESIGNS

Boost children's energy levels with **vibrant colours**.

CUSTOMISED OFFER

Would you like a sports hall with your city or club colours?
Create your own colour based on other
Tarkett collections or from RAL/ Pantone/ NCS proposal.

Minimum quantity 800m² (+/- 10% by colour)

Leadtime 7 weeks

Royal Blue		Night Blue		Sky Blue		Teal	
Lagoon		Coral		Magenta		Purple	
Red		Grey		Black		Orange	
Yellow		Mint Green		Light Green		Lime	
Light Maple		Beech		Golden Maple		Classic Oak	
Dark Beech		Maple Red		Maple Grey		Maple Sky Blue	

● ON DEMAND available, for Compact, Speed & Training, minimum quantity: 700m² (+/- 10%)

Please refer to page 36 for product codes

MIX AND MATCH

Give your creativity
the freedom it deserves!

OMNISPORTS IS A VERSATILE SPORTS SURFACE THAT GOES BEYOND THE NUMBER OF SPORTS AND EVENTS IT CAN HOST



UNIQUE 2M ROLL WIDTH

30% less welding required, decreasing the areas at risk of soiling.


Omnisports floor needs to be installed according to the conditions on site to ensure maximum performance and durability. A variety of installation methods are available to accommodate each facility's particular circumstances.

SUBFLOOR INSTALLATION: POSSIBLE OPTIONS

		TYPE OF INSTALLATION	ACRYLIC GLUED	PU GLUED ON TARKOLAY (VAPOUR BARRIER)	LOOSE-LAID - GREENLAY™
					
		TECHNICAL REQUIREMENTS	ALL OMNISPORTS	REQUIREMENTS	OMNISPORTS REFERENCE MULTI-USE, ACTIVE+, PUREPLAY
ACCEPTED MOISTURE RATE (CCM) PER SUBFLOOR KIND	Concrete		Respecting local standards*	< 7%	< 7%
	Anhydrite		< 0.5%	< 1%	< 0.5%
	Asphalt coated		Dry	Dry	Dry
	Bitumen coated		-	Dry	-
SPECIFICITIES	Compatible with underfloor heating		●	●	●
	Accessibility to subfloor		-	-	●
	Recyclability		-	-	●
	Immediate usage after installation		-	-	●

Providing that the subfloor respects local standards. For detailed information please refer to complete installation guides.
*Unexposed to rising moisture.

INSTALLATION METHODS FOR HIGH MOISTURE CONTENT

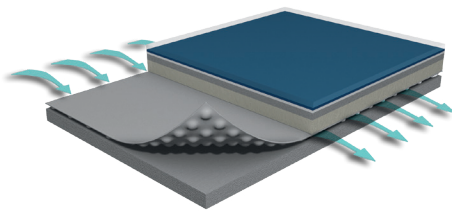


TARKOLAY:
INSTALLATION METHOD WITH ISOLATING MEMBRANE

Tarkolay is a dimensionally stable underlayment that isolates the Omnisports away from the substrate. Removing the potential for vapor pressure to form thanks to the embossed texture on its bottom. Tarkolay also assists with installations over minor cracks in concrete substrates, and over existing surfaces that are adverse to standards installation method. It has smooth top surface for excellent adhesion to Omnisports.

GREENLAY™:
EXCLUSIVE LOOSE LAY INSTALLATION METHOD WITH ONLY 2% OF SURFACE GLUED

GreenLay™ is a sustainable loose-lay installation method offering an economical and convenient solution. This unique method is made possible by:

- The product's outstanding dimensional stability (0.10%)
- Omnisports Reference *Multi-use*, *Active+* & *Pureplay*'s weight
- The honeycomb backing, creating a suction effect

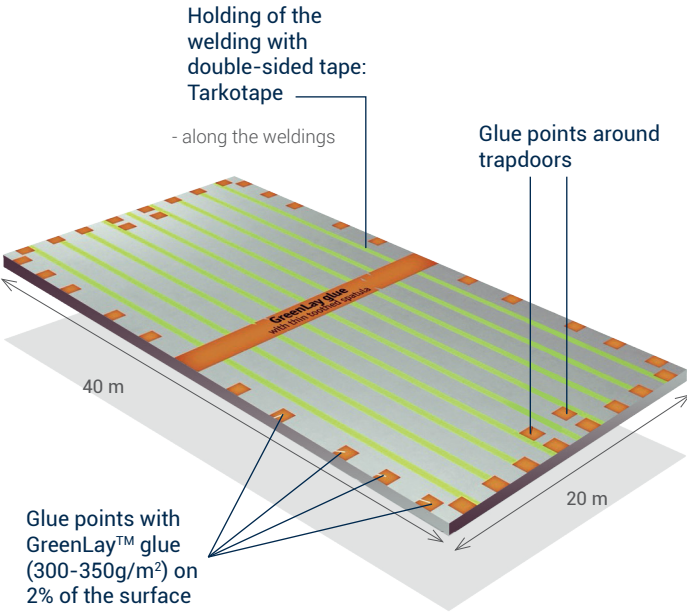

QUICK & EASY TO INSTALL

- Reduced installation time by **20%**
- **Immediate** setting in traffic
- **Easy access to subfloor** after installation with no damage to the subfloor.



PROVEN RELIABILITY

- **EN14904** compliant
- **25 years** of experience feedback
- Over **2 millions** sqm installed
- **10 years** warrantied installation method



CONVENIENT & ECONOMICAL

- Resistance to **rising moisture, up to 7%**, and heated subfloors
- Solution for **asbestos floors** covering
- **Less than 10kg** of glue required per 1000sqm
- Eligible for ReStart® program with **no recycling costs** charged to the customer*



* as part of a ReStart® Agreement

OMNISPORTS' TOPCLEAN XP™ SURFACE TREATMENT MAKES MAINTENANCE EASIER THAN EVER: JUST WASH, RINSE AND YOU ARE DONE!

Omnisports products benefit from a factory applied polyurethane surface treatment TopClean XP™, that makes them extremely resistant to abrasion, scratches, stains and chemicals, thus easier to maintain. Omnisports' TopClean XP™ surface treatment reduces cleaning and maintenance by simplifying the process and eliminating steps.

Omnisports are **naturally neutral** and additional treatments or additives are not necessary. **Omnisports and its TopClean XP™* surface treatment do not promote microbial growth. They do not create or sustain viruses or other micro-organisms on the surface. Our Omnisports are 100% biocide free for healthier indoor sports spaces.**



REDUCED MAINTENANCE COSTS

- Reduced water and chemical detergents consumption
- Up to **25%** of cost reduction on maintenance and cleaning budget



EASY MAINTENANCE

- Mechanical cleaning required **no more than 1 time per week !**



RESISTANCE TO ALL TYPES OF STAINS AND FOOTWEAR MARKS

- Requires less periodical maintenance **max 4 times per year**



EXCEPTIONAL RESISTANCE TO INDENTATION MARKS AND ROLLING LOADS

- Allows safe placement of sports and extra sporting** equipment

* Except Dancefloor

** With Omnisports Reference *Multi-use*


Please refer to official maintenance instructions for further details



VALUE YOUR JOBSITE WASTE!

RESTART®: FREE COLLECTION AND RECYCLING SERVICE

- Optimises jobsite waste management.
- Guarantees traceability of collected off-cuts.
- Integrates sustainable development and anticipates European regulation requirements.

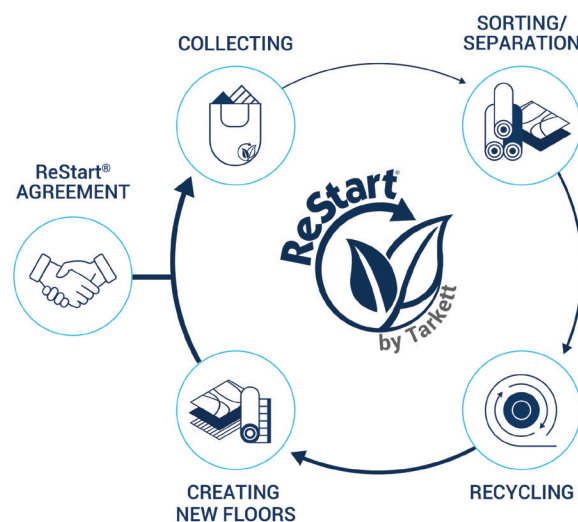

TAILORED OFFER

ROLL LENGTH ON DEMAND

Tarkett Sports can handle your length requirement in order to give you and your project the personal attention to details you deserve:

- Available by «multiple» of 10cm
- Waste reducing
- Time saving

Minimum quantity: 250m² (per colour)

GET THE AMOUNT YOU REALLY NEED

CUT SERVICE

- Available for all product profiles on stock rolls
- Minimum quantity: 5m²

WOULD YOU LIKE TO IMPROVE YOUR KNOWLEDGE OF INDOOR SPORTS?

TAILORED TRAINING MODULES

Contact our professional and passionate training team for specific training modules that fits your needs:
training.Sport@tarkett.com



«
A QUESTION?
A PROJECT?

Contact us !

info.tarkettsports.indoor@tarkett.com

»

CIRCULAR ECONOMY

ENDLESSLY INNOVATE TO REDUCE OUR IMPACT ON THE PLANET

- Omnisports products contain a percentage of recycled materials **up to 32%**.
- Omnisports products are **recyclable**: the clean off-cuts can be collected, recycled and reused in the production of vinyl floor coverings through ReStart® Programme.
- Omnisports products are covered by a specific third-party verified **Environmental Product Declaration (EPD)**, disclosing among other indicators the carbon footprint of the flooring during its whole lifecycle.



GOOD MATERIALS

OUR RAW MATERIALS ARE CAREFULLY SELECTED

Tarkett Sports is **committed to an environmental strategy** based in particular on **qualitative components choice** to design its products, **users' health and well-being**, as well as **materials reuse**:

- Omnisports products are **phthalate free**: they are designed with phthalate-free plasticizers that are approved for use in young children's toys and food packaging.
- Omnisports products are **biocide free**: antimicrobial treatments have been removed to preserve human health and the environment.
- Omnisports products are covered by a third-party verified ingredient disclosure and material risk declaration down to 100 ppm (0.01%), thus **ensuring compliance beyond REACH requirements (MHS)**.



INDOOR AIR QUALITY

EXCEEDING INDUSTRY STANDARDS AND CHAMPIONING CLEARER AIR FOR ASTHMA AND ALLERGY SUFFERERS

- Omnisports products contribute to better indoor air quality with **TVOC emissions 100 times lower** than the most stringent world standards.
- Omnisports products received the label **Allergy UK Seal of Approval: recognised in 135 countries**. Our ranges contribute to prevent people from allergy diseases.
- Our unique Omnisports installation method, GreenLay™, is sustainable and convenient with only 2% of the surface glued.




INSTALLATION ACCESSORIES



GREENLAY™ GLUE
Bi-components (A+B)
Component A: 1 pot of 5kg
Component B: 1 pot of 700g




GREENLAY™ TARKOTAPE
Double-sided adhesive
for GreenLay™ installation
1 box of 8 rolls
1 roll: 152 mm x 25 lm



TARKOLAY UNDERLAYER
Moisture barrier for wet
substrates creating natural
ventilation
Thickness: 1.3 mm

FINISHING ACCESSORIES



VINYL SKIRTINGS
1 box of 20 pcs - 51.40 lm
60 mm high x 15 mm wide x 2570 mm long

**VENTILATED SKIRTING
FOR GREENLAY™ &
TARKOLAY INSTALLATION**
1 box of 5 units - 11.75 ml
22 mm thick x 65 mm wide x 2350 mm long



THRESHOLD STRIPS
Aluminium transition strips
(4 sizes)

60 or 80 mm wide: 1 box of 10 pcs - 30 lm
100 or 130 mm wide: 1 box of 5 pcs - 15 lm
5 mm high x 3000 mm long


PROTECTION



PROTECTILES
Textile protection tiles
1 box of 5 pcs - 10m2
total weight: 3.1kg/m²
total thickness: 5.2 mm
1 m x 2 m



**TROLLEY FOR
PROTECTILES**
Ideal flooring
for traffic areas
Capacity: 100 Protectiles



TOUCHDOWN
PVC floor protection
total weight: 2.2kg/m²
total thickness: 1.45mm
2m x 22 lm



**UNROLLER FOR
TOUCHDOWN**
2 elements kit
(A) device
(B) chuck

COMPLEMENTARY SOLUTIONS

FIND OUT MORE ABOUT...

ANTI-SLIP SOLUTIONS SAFETRED*

The plus points:

The solution is specially designed for wet areas. It offers optimal grip with R10 slip resistance in combination with easy maintenance.

WETROOM CONCEPT*

The plus points:

This unique all-in-one concept offers coordinated floors, walls and accessories, 100% waterproof, is ideal for walk-in shower areas and is easy to maintain.

PROTECTWALL VINYL SOLUTIONS*

The plus points:

The economical, design and resistant wall protection solution against shocks and impacts that matches perfectly with Omnisports.



* More information on: <https://professionals.tarkett.com/>



Some of our international references...



**SAINT PHILBERT DU PEUPLE
GYMNASIUM**
Saint Philbert du Peuple, France (2018)



**BELLEGRAVE PESSAC
SPORTS CENTRE**
Pessac, France (2018)



WESTSIDE CALVARY CHAPELLE
Spencerport, NY USA (2016)



METROPOLITAN BALLET ACADEMY
Montreal, Canada (2019)



**SUAPSE UNIVERSITY
SPORTS HALL**
Aytré, France (2016)



BRIGHT FIT FITNESS
Ural region, Russia (2018)



JEAN GRANELLE GYMNASIUM
Villeneuve Loubet, France (2020)



SAINT JAMES SCHOOL
Hagerstown, MD USA (2019)



ROSE CITY FUTSAL
Portland, OU USA (2019)



THE CORE
Colleyville, TX USA (2017)



TEDDY RINNER GYMNASIUM
Lesquin, France (2020)



**SAINT JOSEPH
MIDDLE SCHOOL**
Caen, France (2020)

		OMNISPORTS PRODUCT CODES						WELDING RODS			
		COMPACT	SPEED	TRAINING	REFERENCE <i>MULTI-USE</i>	ACTIVE+	PUREPLAY	4 MM (DANCEFLOOR)	5 MM	NCS	LRV
DESIGN	COLOUR										
SOLID	ROYAL BLUE	3917016	3707016	3708016	26528016	26541016	26513016		1285367	S4050-R90B	10
SOLID	NIGHT BLUE	3917024	3707024	3708024	26528024	26541024	26513024		1285029	S4050-R90B	12
SOLID	SKY BLUE	3917017	3707004	3708017	26528017	26541017	26513017		1285172	S2050-R90B	22
SOLID	TEAL	3917015	3707015	3708015	26528015	26541015	26513015		1285015	S2555-B40G	18
SOLID	LAGOON	3917034	3707034	3708034	26528034	26541034	26513034		1285195	S2030-B50G	42
SOLID	CORAL	3917033	3707033	3708033	26528033	26541033	26513033		1285633	S2060-Y90R	21
SOLID	MAGENTA	3917022	3707022	3708022	26528022	26541022	26513022		1285030	S2060-R30B	16
SOLID	PURPLE	3917025	3707025	3708025	26528025	26541025	26513025		1285027	S4050-R40B	11
SOLID	RED	3917011	3707003	3708011	26528011	26541011	26513011		1285808	S2570-B40G	16
SOLID	GREY	3917009	3707009	3708009	26528009	26541009	26513009	1288341	1285183	S5500-N	20
SOLID	BLACK	3917010	3707010	3708010	26528010	26541010	26513010	1292206	1285206	S9000-N	4
SOLID	ORANGE	3917012	3707012	3708012	26528012	26541012	26513012		1285139	S1070-Y60R	35
SOLID	YELLOW	3917013	3707013	3708013	26528013	26541013	26513013		1285013	S1060-Y10R	4
SOLID	MINT GREEN	3917026	3707002	3708026	26528026	26541026	26513026		1285365	S4040-G	17
SOLID	LIGHT GREEN	3917020	3707020	3708020	26528020	26541020	26513020		1285025	SS1060-G60Y	40
SOLID	LIME	3917035	3707035	3708035	26528035	26541035	26513035		1285122	S1060-G80Y	57
WOOD	LIGHT MAPLE	3916019	3911019	3709019	26528019	26542019	26505019		1285031	S1010-Y20R	52
WOOD	BEECH	3916001	3911001	3709001	26528001	26542001	26505001		1285363	S3020-Y30R	30
WOOD	GOLDEN MAPLE	3916002	3911002	3709002	26528002	26542002	26505002		1285368	S2030-Y30R	36
WOOD	CLASSIC OAK	3916003	3911003	3709003	26528003	26542003	26505003		1285016	S3040-Y30R	25
WOOD	DARK BEECH	3916020	3911020	3709020	26528007	26542020	26505020		1285032	S7020-Y70R	9
WOOD	MAPLE RED	3916006	3911006	3709006	26528006	26542006	26505011		1285808	S2570-Y90R	16
WOOD	MAPLE GREY	3916005	3911005	3709005	26528005	26542005	26505009		1285183	S5500-N	20
WOOD	MAPLE BLUE	3916017	3911017	3709017	26528014	26542017	26505017		1285035	S2050-R90B	20
DANCEFLOOR		UNI GREY : 3685002 - UNI BLACK : 3685001					SPEED TABLE TENNIS		UNI RED : 3910002		

ACCESSORIES & PROTECTION PRODUCT CODES:

GREENLAY™ GLUE
A : 1551057
B : 1551058

GREENLAY™
TARKOTAPE
1551185

TARKOLAY
UNDERLAYER
3960005

VINYL SKIRTINGS
Beech : 1551064
Maple : 1551062
Oak : 1551063
Royal blue : 1551061
Sky blue : 1551059

THRESHOLD STRIPS
60 mm wide : 1551078
80 mm wide : 1551079
100 mm wide : 1551080
130 mm wide : 1551081

PROTECTILES
Anthracite: 44003000
Light grey: 44003001
Dark brown: 44003002
Night blue: 44003003
Red: 44003004

TROLLEY FOR
PROTECTILES
1568001

TOUCHDOWN
Grey : 3964001
Beige : 3964002
Green : 3964003

UNROLLER FOR
TOUCHDOWN
(A) device : 1562001
(B) chuck : 1562002

VENTILATED SKIRTING
FOR GREENLAY™ &
TARKOLAY INSTALLATION
Oak varnished: 1551067
Beech varnished: 1551065
Ash varnished: 1551069

TECHNICAL DATA	STANDARD	COMPACT	SPEED	TRAINING	REFERENCE <i>MULTI-USE</i>	ACTIVE +	PUREPLAY
CERTIFICATION & CLASSIFICATION							
Type of floor covering	EN 14041	Heterogeneous compact indoor floorcoverings	Heterogeneous indoor floorcoverings	Heterogeneous indoor floorcoverings			
	EN 14904				Heterogeneous indoor sport floorcoverings	Heterogeneous indoor sport floorcoverings	Heterogeneous indoor sport floorcoverings
Declaration of Performance	EN 14041	0120-003-DoP-2013-04	0120-006-DoP-2013-04	0120-026-DoP-2013-04			
	EN 14904				0120-080-DoP-2020-06	0120-095-DoP-2020-09	0120-071-DoP-2016-04
TECHNICAL CHARACTERISTICS							
Total thickness	ISO 24346 (EN 428)	2.0 mm	3.45 mm	5.0 mm	6.2 mm	8.1 mm	9.4 mm
Total weight	ISO 23997 (EN 430)	3 045 g/m²	3 040 g/m²	3 600 g/m²	3950 g/m²	4760 g/m²	6 200 g/m²
Width	ISO 24341 (EN 426)	2 m	2 m	2 m	2 m	2 m	2 m
Length	ISO 24341 (EN 426)	23 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm
REQUIREMENTS FOR USE							
Shock absorption ■ ■ ■	Average measured value		≥ 4%	≥ 18%	P1	P2	P2
	EN 14808 requirement				≥ 25%	≥ 35%	≥ 35%
Friction ■ →	Average measured value	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
	EN 13036-4 requirement	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110
Vertical deformation ■ ↓	Average measured value		≤ 0.8 mm	≤ 1 mm	P1	P2	P2
	EN 14809 requirement		≤ 5 mm	≤ 5 mm	≤ 2 mm	≤ 3 mm	≤ 3 mm
TECHNICAL REQUIREMENTS							
Vertical ball behaviour ■ ⬆	Average measured value		Compliant	Compliant	Compliant	Compliant	Compliant
	EN 12235 requirement		≥ 90%	≥ 90%	≥ 90%	≥ 90%	≥ 90%
Reaction to fire	EN 13501-1	Bfl s1*	Cfl s1*	Cfl s1*	Cfl s1*/**	Cfl s1*/**	Cfl s1*/**
Resistance to wear ■ ⌚	EN ISO 5470-1		≤ 1g	≤ 1g	≤ 1g	≤ 1g	≤ 1g
Resistance to indentation ■ ↓	Average measured value***		≤ 0.18 mm	≤ 0.11 mm	≤ 0.10 mm	≤ 0.20 mm	Compliant
	EN 1516 requirement		≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm
Resistance to a rolling load ■ ⦿	Average measured value			Compliant	Compliant	Compliant	Compliant
	EN 1569 requirement			≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm
Transmitted impact noise	ISO 10140-3		20dB	20dB	21dB	21dB	21dB
Thermal resistance	EN ISO 10456	Approx. 0.02 m² K/W	Approx. 0.05 m² K/W	Approx. 0.07 m² K/W	Approx. 0.09 m² K/W	Approx. 0.12 m² K/W	Approx. 0.14 m² K/W
ENVIRONMENTAL PERFORMANCES							
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
COLOURS							
		Solid: 16/ Wood: 8	Solid: 16/ Wood: 8	Solid: 16/ Wood: 8	Solid: 16/ Wood: 8	Solid: 16/ Wood: 8	Solid: 16/ Wood: 8

The above information is subject to modification for the benefit of further improvement. (01/2021). * Glued installation ** GreenLay™ installation *** Measured on glued or with GreenLay™ Tarkett Sports' instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett Sports – Tel. +33 1 41 20 41 34 ■ **Germany:** Tarkett Holding GmbH – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett BV – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Fieldturf Poligras Tel: +34 630 93 67 71 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett org. složka – Tel: +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizačná zložka – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel: +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico /Central America:** Tarkett Latam Mexico – Tel. +55 11 98410 9310.